

computing today

No 1

**November
78**

**more on
TRITON**

THE NEW MAGAZINE FOR SMALL SYSTEMS WITH BIG IDEAS

CUTS Card

Basically BASIC

NASCOM 1

Presented as a supplement to ETL.

Hop on a Nasbus to 32K of memory now

The Nascom — 1 is designed with expansion in mind. This is made possible by using the best products available. The Z80 microprocessor incorporated in the basic system is so powerful it can support 64K bytes of memory and 256 ports. To utilize this capability, we have designed the buffered 77 — way Nasbus.

With this arrangement, the way is clear for considerable expansion, starting with our new memory expansion board. It has 16 memory sockets and two EPROM sockets. Therefore, you can fill it with 4K dynamic RAM up to a maximum 8K or with 16K dynamic RAM up to a maximum of 32K. A 2K Tiny BASIC in EPROM has been developed for the board.

To go with the board, we have produced a very flexible I.O board with three PIOs each giving two, 8bit ports, plus a UART for serial interface.

As you start building up your Nascom system you will need a convenient means of storing boards. Our new, custom-designed, Vero frame

will allow for a Nascom — 1 to link through a buffer board to a 77-way Motherboard. There is then the option of eight or more expansion boards. To power this capability there is a new 8.5 amp power supply especially designed for the frame.

No other system offers so much at such a low cost. And it all starts with the basic Nascom — 1 kit which for just £197.50 offers an intelligently usable system with video and cassette interface, a full alpha-numeric keyboard and a mighty CPU chip. So if you want the best — make it a Nascom system.

**Nascom-1 Kit still only
£197.50 + VAT**



UK National Distributors

Camera Centre,
Barrow-in-Furness, Cumbria

Crystal Electronics,
Torquay, Devon

Electrovalue,
Egham & Manchester

Eley Electronics,
Glenfield, Leicester

Henry's Radio,
London W2

Lock Distribution,
Oldham, Lancs

Lynx Electronics,
Chesham, Bucks

Microdigital,
Liverpool L2

Teleplay,
New Barnet, Herts

Stop press...

Microcomputer Seminar

Nascom Microcomputer's highly successful seminar is coming to Bristol. The programme will be similar to London and Manchester, both of which were sold out. The day includes five lectures, demonstrations and an open forum. Venue is the Dragonara Hotel, Bristol, Saturday, October 14th, 09.50 to 17.30.

Admission: £4.50 (inc. VAT). Lunch will be available at £4.00 (inc. VAT) per head if there is sufficient demand.

Please send me

..... tickets to your seminar at £4.50 each and further details on Nascom-1 expansion products/Nascom-1 Kit/Int. Nascom Microcomputer Club.*

*delete as applicable



Nascom Microcomputers

92 Broad Street, Chesham, Bucks.
Tel: (02405) 75151

Name _____

Address _____

Tel. No _____

Cut out coupon and post to Nascom Microcomputers. Cheques and PO's should be made payable to Nascom Microcomputers.

CT117

computing today

NO 1 november 1978

NASCOM 1 REVIEW	5	Nice one NASCOM
BASIC EXPLAINED	9	Say no more
CUTS CARD	15	CUTS above the rest
TRITON IMPRESSIONS	19	Colling all TRITON users
EAST COAST REPORT	21	Important show for US
TRITON BASIC	23	Try it on Triton
MICROFILE	30	Gary Evans in training

EDITORIAL ADVERTISING PRODUCTION

Halvon W. Moorshead
Ron Harris B.Sc
Gary Evans
Jim Perry
Phil Cohen B.Sc, William King
John Koblanski
Steve Ramsahadeo
Paul Edwards
Margaret Hewitt
Andrew Scott
Kim Hamlin, Bren Goodwin
Tim Salmon, Val Tregidgo
Mark Strathern (Manager), Tom Moloney

INTRODUCTION

The first issue of any magazine is an exciting time — certainly for the people working on the project and, hopefully, for the readers. Computing Today, although presented free with ETI, is just such a new magazine, which will have a style and identity of its own.

Computing Today will cover the fields of computing, from the home, education, and small business viewpoints. Computing to us will mean everything from the complete small business system, floppies and all, to a single bit micro in a control application.

The growth of small systems over the past few years has been astounding the reasons for this growth are many and varied — we won't go into them here — and it is our hope that the next few years will see this expansion maintained.

One of the reasons for launching Computing Today was the fact that it was no longer possible to devote enough space within ETI to cover this important area of small systems without sacrificing other features of ETI that are equally important to many of our readers. ETI plus CT will allow us to keep everybody happy.

Although this first issue of CT is only 32 pages, if the growth we mentioned is maintained, rest assured that CT will grow to keep pace.

This first issue of CT is published to coincide with the launch of the TRITON, an exciting new system for the hobbyist/education areas. CT has similar, equally exciting projects in the pipeline and if you don't want to miss out on important news and developments in Computing be sure to read us every month.

Airamco Ltd. MICRO COMPUTER PRODUCTS

Distributors for JADE COMPUTER PRODUCTS
All products brand new with full industrial specification

S100 COMPUTER CARDS KIT	ASSEMBLED	BARE BOARD
Mother Board £71.00	£82.50	£26.25
Desk Top Rack, 12 slot mother board + 15A @8V, 2A @± 16V £199.00		
Jade 8080A CPU BOARD £75.00	£122.50	£22.50
Jade Z80 CPU BOARD 2MHz £99.95	£138.75	£26.25
Jade Z80 CPU BOARD 4MHz £112.50	£149.95	£26.25
Jade Serial/Parallel I/O BOARD £93.70	£134.29	£22.50
Jade 2708/2716 EPROM BOARD £44.95	£82.46	£22.50
(16x2708 or 2716) WITH 8 2708s £97.46	£134.96	£22.50
Jade REAL TIME CLOCK BOARD £93.71	£134.96	£22.50
Problem Solvers 16K STATIC RAM 450nS —	£270.00	—
16K STATIC RAM 250nS £94.50	£296.00	—
Jade 8K static RAM BOARD 450nS £104.95	£112.50	£19.95
Jade 8K static RAM BOARD 350nS £127.50	£119.96	£19.95
Jade 8K static RAM BOARD 250nS S.D. Sales "EXPANDORAM" £113.25	£142.50	£19.95
Dynamic Memory 375nS access time 8K £189.00	—	—
Memory 375nS access time 16K £297.00	£229.00	£189.00
Memory 375nS access time 32K £513.00	£337.00	£297.00
Memory 375nS access time 64K —	£553.00	£513.00
VERSAFLOPPY DISK CONTROLLER (up to 4 drives 5 1/4" or 8") £11.75	£165.00	—
SHUGART 8 Drive —	£385.00	—
PERTEC 5 1/4" Drive —	£225.00	—

Components	21L02-1 450nS	£1.20
2708 1024x8 EPROM £6.99	8 for	£7.92
2716 2048x8 EPROM £29.90	21L02 250nS	£1.40
(intel)	8 for	£9.60
2516 2048 x 8 EPROM £29.90	2112-1 256x4 (450)	£2.25
(equivalent of above) T.I.	4044 4Kx1 (450)	£7.45
1702 256x8 EPROM £4.85	4045 1Kx4 (450)	£8.25
2104 4096x1 DRAM £3.50	Used North Star Mini disk system + controller + some software	£399.00
8 for £26.00	8212	£2.49
2107B-4 4096x1 DRAM £3.50	8216	£2.75
8 for £26.00	8224-4	£7.46
Note New Low Prices 16K Memory	8226	£2.95
4115 5kM DRAM £9.99	3881	£9.50
4116 16kx1 DRAM £14.99	3882	£9.50
8 for £108.00	S100 Skts.	£3.30
6821P PIA £5.90	Textool 24 pin Zero force Skt.	£5.60
AY 51013 UART £4.50	4115 8kx1 DRAM	£9.99
AY51014 UART(5V) £6.50	81LS95	£1.25
AY53600 ENCODER £9.99	81LS97	£1.25
8080A CPU £8.99		

All Prices EXCLUDE VAT @ 8%.

Trade discounts on Quantity
Please add £1.00 P&P for S100 items then add VAT @ 8%.

24-hr. Ansaphone order service with ACCESS or BARCLAYCARD.

MAIL ORDER ONLY



For components please add 40p P&P, then add VAT @ 8%.

AIRAMCO LTD.
30 WITCHES LINN
ARDROSSAN
AYRSHIRE
KA22 8BR
TEL. 0294 65530

Semiconductor prices are always changing and the trend is generally downwards. So ring for latest up-to-date details.

TANGERINE

COMPUTER SYSTEMS LIMITED



The new low cost VDU - Tangerine 1648
(See page 16, ETI, Oct. '78 for feature details)

ORDERING INFORMATION

The normal **KIT price is £139.86**, which includes postage, packing and insurance and VAT @ 8%. HOWEVER, as an introductory gesture we are **discounting this price by £10**, for all orders received postmarked **BEFORE 12th December, 1978**.

If you require further information, send an A4 sized self-addressed envelope. If you wish to purchase a kit please send a cheque or money order made payable to:

TANGERINE COMPUTER SYSTEMS LIMITED

RIVERMILL LODGE, LONDON ROAD, ST. IVES,
CAMBS. PE17 4BR
Tel. St. Ives (0480) 65666

IN SCOTLAND

IN SCOTLAND

NASCOM 1

Z80 Microcomputer kit

Undoubtedly the finest value for money kit available anywhere. Fully socketed.

INTERFACE FOR:

TV (UHF)
TV Monitor
Cassette
Teletype
32k Ram expansion board

May be seen working
9 a.m. - 5 p.m. Mon.-Fri.

Callers welcome

Price **£197.50 + VAT (8%)**

Callers welcome



STRATHAND
44 ST. ANDREW'S SQ.
GLASGOW G1 5PL
041-552 6731

Callers welcome



Tel. order welcome with Access and Barclaycard

B-BUG

SUPER SMART NEW MONITOR FOR NASCOM OWNERS

FEATURES INCLUDE:—FULLY COMPATIBLE with existing hardware/software; **NEW TAPE I/O 4 TIMES FASTER** with extensive error checking (see cassettes below); **INTELLIGENT COPY** command for program relocation; **ARITHMETIC** for address and offset calculation; **HEX KEYBOARD** function — throw away your **ASCII** tables!; **SUPER-SHIFT** allows all displayable characters to be entered from the keyboard; **FLAG DISPLAY** shows the flags set — C, Z etc. when using the **EXTENDED REGISTER DISPLAY** which shows the IX, IY etc. registers as well; **SUBROUTINES** include:—**PSEUDO RANDOM NUMBER GENERATOR**; **ASCII to PACKED BCD** and vice-versa; **VARIABLE INTERRUPTABLE DELAY**; **CHARACTER STRING OUTPUT**; **TABLE SEARCH**; **STRING OUTPUT**; **CURSOR MOVEMENT**; **AUTO-RUN** facility allows a high-speed tape to be loaded and program executed with no operator intervention.

B.BUG is supplied in 2 x 2708 **EPROMS** which plug into your existing sockets. **NO MODIFICATIONS NEEDED**. Demand will be high and orders will be handled in strict rotation. Delivery currently ex-stock so **ORDER NOW AND BE A 'B.B.'!**

B-BUG in 2x2708's only £23.40 including documentation.


C10 DATA CASSETTES . . . 35 pence each (Nascom, Pet, TRS80, Apple, etc.).

Please add 30p p&p for orders under £10. VAT inclusive. E&O.E. Dealer enquiries welcome.

VIEWFAX LTD.

KING EDWARD BUILDING, CORPORATION STREET,
BIRMINGHAM B4 6SE.

The Nascom 1 Reviewed

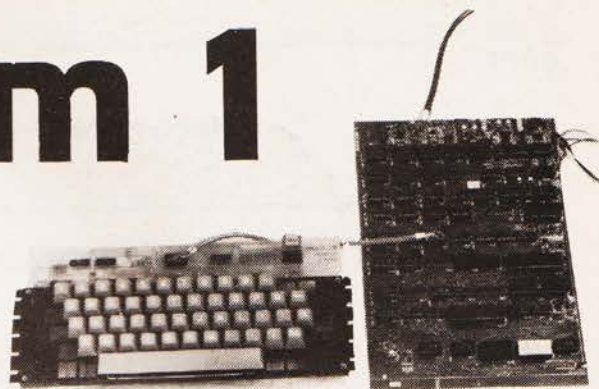

5V

1k

22k

5k6

820p

74LS123

15 14 16 2 3 1 4 8

VDUSEL FROM IC36 PIN 6

TO IC11 PIN 5 (see text)

Ground

5

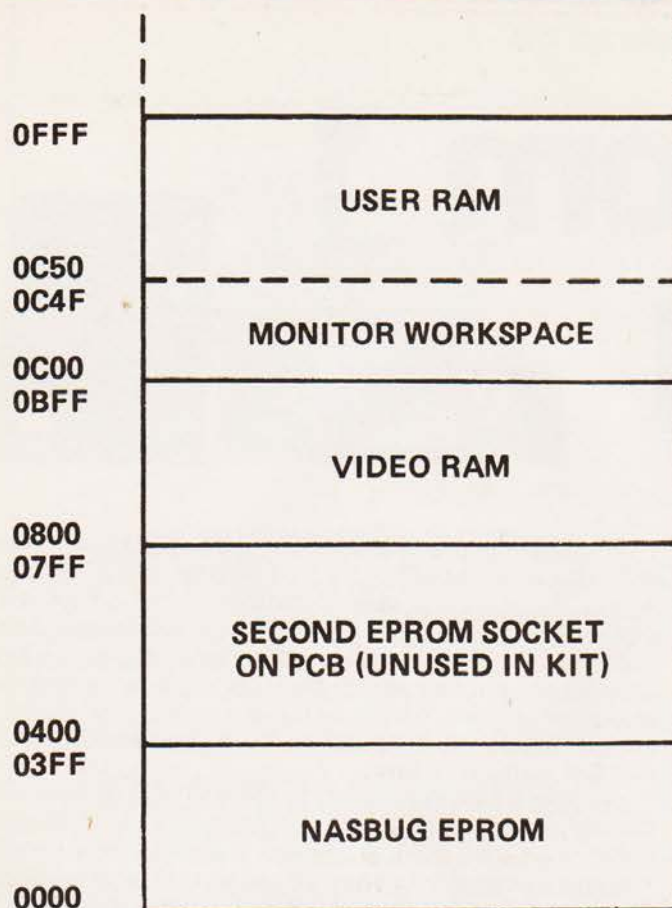


Fig. 2. System memory

voltage crossover (although diodes are supplied in the kit).

Now for the good news — the PSU is being completely re-designed and the parallel expansion approach dropped. Instead there will be an 8 amp kit for larger systems.

Memory and VDU

Before moving on to the operation of the kit, there are a couple of other hardware points to be mentioned. Firstly, the arrangement for resetting the CPU (by means of the RESET switch) would have to be altered for use with dynamic RAM expansion. CPU operation is suspended for as long as the RESET button is held down, so dynamic RAMs (assuming they are refreshed by the Z-80) would soon forget what they were doing. The buffer board will contain circuitry to correct this.

Secondly, the modulator seems to produce a very noisy signal. Picture quality is, to a large extent, dependant on the ability of a domestic TV to reject noise. Fortunately, commercial modulators are very cheap to buy and easy to fit to the NASCOM 1, as there is a 1V video signal output from the board.

NASCOM 1 uses a memory-mapped VDU, which means that the video RAM is shared with the CPU, the latter having priority. The instructions say that the video is blanked during VDU RAM access by the CPU but this is only partially true. In fact, the blanking signal (VDUSEL) is not long enough, so that a noise signal which shows as 'snow', especially on multiple VDU RAM access, appears on the screen.

This can be simply corrected by using the circuit in Fig. 1 Pin 5 of IC 11 should be bent out from the socket and the connection made with an insulated 'sodercon' socket. Increase the potentiometer value until the snow just disappears.

Display Format

The format of the display is 48 characters wide by 16 lines deep, which produces a very readable picture on a domestic TV. The remaining 256 bytes ($1024 - (48 \times 16) = 256$) of the 1K video RAM block are in the margin of the display, since the video RAM address counter is not disabled during the undisplayed portions of the video signal. In addition, the bottom 15 lines of the display (plus margins) are scrolled by the monitor, making the unused RAM locations useless.

The fact that only 15 lines are scrolled leaves the top line for header text or data. This is a very useful feature, since almost all programs can make use of a fixed display line. Figure 4 gives details of the VDU addressing and scrolling.

Operating System

The operating system is held in a 2708 (1K x 8) EPROM, which goes by the name of NASBUG. Since July, kits have been supplied containing NASBUG MK2 as the original version contained an error in the serial input routine and a couple of errors in the keyboard look-up table. However, these facts should not detract from the excellent software which is crammed into the 1K of NASBUG.

To call a command, only a single letter need be entered, followed by a number of arguments in HEX. Leading zeroes may always be omitted on input. The commands are as follows:

modify: M aaaa

The monitor responds by printing address aaaa followed by the contents of that memory location, followed by a prompt and the cursor. If only examination of the memory location is required, pressing NEWLINE will step through the memory sequentially, printing information in the same format. The command is aborted by fullstop newline. Memory may be modified by entering new data after the prompt.

tabulate: T aaaabbbb

Prints on the screen the contents of memory between addresses aaaa and bbbb.

copy: C aaaa bbbb cccc

Copies a block of memory, length cccc, from address aaaa to bbbb. Care must be taken that either bbbb is greater than aaaa plus cccc or that bbbb is less than aaaa, otherwise the data block will be corrupted.

execute: E aaaa

Executes a program starting at address aaaa. There are two occasions when no argument is required. Firstly, if a program is aborted by the RESET button, E NEWLINE will cause execution to start at the same place as the previous E command. Secondly, at a breakpoint, E with no argument will cause execution to resume from the breakpoint.

break: B aaaa

Will insert a special code at address aaaa in a user program. When this code is encountered during execution it will cause the program to stop, display

keys may be changed with ease and various combinations of simultaneous key pressing can easily be detected and acted upon. An example of the use of this feature is a program called SUPERSHIFT, by Richard Beal. The @ key is utilised as a sort of control key, enabling the complete character set of the MCM 6576 character generator to be used via the keyboard.

Summary

Overall, the NASCOM 1 is an excellent unit. It is easy to level criticism at any product, especially one which has been designed down to a price, rather than up to a specification, but I think that the compromise has been very successful in this case. There have been delays in the delivery, mainly caused by underestimation of demand, which in turn has caused delays in the development and despatch of the advertised add-on goodies (up to and including mini-floppy). Hurry up, Lynx.

To finish on a personal note, I've been using my NASCOM 1 for about 5 months (it worked first time) and I am very happy indeed with it. I can hardly wait for 16K and an assembler (MENTAL NOTE: Must send Christmas card to bank manager), although I am continually surprised at what can be squeezed into the 944 bytes available. The monitor is easy to use and fairly comprehensive, bearing in mind that it is only 1K. Debugging is a doddle with breakpoint and single step. NASCOM 1 is a real microcomputer at a relatively low cost and should be easily expandable to a really powerful system.

CTI



THE TOTAL SOLUTION FROM ALMARC OF COURSE!

Now Almarc & Vector Graphic offer the complete solution to your computing needs for £2300.00*. The Vector MZ needs only the addition of a V.D.U. and it's ready to go. Completely assembled and fully tested, the Vector MZ offers the following features as standard —

- S-100 bus
- 4 MHz Z80A processor
- 158 instructions
- Two quad density Micropolis floppies — over 630k bytes on line
- Serial port
- Two parallel ports
- 32K static ram
- 12K prom/ram board with extended monitor
- Extended disc Basic

Simply connect your peripherals (Elbit V.D.U.s & Centronics printers are available from Almarc) and you're up and running and, because the MZ uses the S-100 bus, you can plug in a massive range of add-on units.

Ring or write for a demonstration to: —

ALMARC DATA SYSTEMS LTD.

29 Chesterfield Drive
Burton Joyce, Nottingham
Tel: 0602 248565

*Discount terms available

NEW

56-STATION ASCII KEYBOARD NOW IN STOCK — ASCII KEYBOARD MODEL KB756



Full 128 character set with ROM encoder (Upper and lower case + control shift).

Fully TTL — compatible — power requirements + 5v-12v.

Supplied with full technical data, code chart, pin connections, circuit diagram and application notes.

FANTASTIC
VALUE AT £60

+ £1.50 p&p + 8% VAT (mail order total £66.42)

SELF-SCAN ALPHANUMERIC PANEL DISPLAY


16/18 position display with 64 character repertoire, 5 x 7 dot matrix. Input: 6-bit BCD code, power requirements +5v, -12v. Character size 0.40" x 0.28". Overall dimensions 8 1/4" x 2 1/4" x 1 1/4". Supplied with full technical data. Price £55.00 + 75p P&P + 8% VAT. (Mail order total £60.21)

BALL MIRATEL VIDEO MONITOR

9" diagonal P4 phosphor tube. Bandwidth 12 MHz. Input voltage 220v 50/60 Hz 24W. Output voltage +15V DC (short circuit protected) +12V DC, 12.6V rms. Supplied complete with high & low voltage power supplies, amplifier, and attractive moulded plastic housing including space for keyboard. Price £95.00 + carriage + VAT.

SPECIAL PURCHASE — MITE

123P Alphanumeric printer mechanisms



BRAND NEW SURPLUS

ONLY £75

+ £3.50 P & P + 8% VAT
(Mail order total £84.78)

Solenoid-operated page printer using standard reversible typewriter ribbon. Prints standard 64-ASCII character set on 8 1/2" paper (80 characters per line, 6 lines to the inch). Maximum speed 11 cps. Power requirements 115VDC. Compact, light-weight unit 9 3/4 lbs., 12" x 9" x 2 3/4". Supplied complete with full technical manual.

We also specialise in: DEC minis — PDP8 and PDP11 processors, add-on memory, peripherals and spares. Hard copy terminals — ASR 33 and KSR 33 Teletypes, Data Dynamics 390, Texas Silent 700. Send for complete lists.

ELECTRONIC BROKERS LTD.

49-53 Pancras Road, London NW1 2QB.
Tel: 01-837 7781. Telex: 298694.

HAZELTINE VISUAL DISPLAY UNIT

- * Teletype Compatible
- * 12" Diagonal Screen
- * TTY Format Keyboard
- * 12 lines of 80 characters
- * 64 ASCII Character Set
- * 5 x 7 Dot Matrix
- * Switch-selectable Transmission Speeds up to 9600 baud
- * Switch-selectable Parity
- * Standard CCITT V.24 Interface



MODEL H-1000 PRICE £350 + carriage and VAT

Also available: —

Model H-1200: Specification as for H-1000 except 24 lines of 80 characters displayed. Price £425.00 + carriage + VAT.

Model H-2000: Buffered Editing model with direct cursor addressing, dual intensity video, and detachable keyboard with separate numeric and edit clusters. 27 lines of 74 characters. Price £495.00 + carriage + VAT.

A copy of trading conditions supplied on request.

This month we feature the first part of a software teaching series

Beginning BASIC

PART 1 Algorithms and flow charts

IT IS, UNFORTUNATELY, VERY EASY when watching a computer in action to subconsciously endow the machine with intelligence — under no circumstances is this the case.

Regardless of whether you are programming in the simplest of machine codes or the most sophisticated of high level languages, there is no way that the computer can do anything other than what it has been programmed to do, and the signs of intelligence that we seem to detect are present only because of the skill of the programmer. In fact, programming today is becoming quite a major business area, simply because of the amount of skill involved. As with every other trade, however, there are various tools which are at the disposal of the programmer to help in his work — one of the most important of these being the flow chart.

It does not matter what language we program in, be it machine code or BASIC, the technique of drawing and using flow charts is always the same.

We start with a problem, find an algorithm (finding an algorithm for a problem means finding a method of giving a complete and correct solution to the problem in a finite number of steps) to solve the problem, draw the flow chart and then write the program from the flow chart. In order that one programmer can understand another's work, certain conventions are adopted when drawing flow charts (see Fig 1).

As a first example of algorithm and flow chart drawing, we will take the case of a young person applying for membership of a Social Club, wishing to discover what fees are payable as an annual subscription.

Consider the following —

"The annual subscription for a man is £10, unless he is under the age of 25, when the subscription shall be halved. The annual subscription for a woman shall be £8, unless she is under 25, when the subscription shall be halved. Married women applying for membership shall be charged half the amount payable by a single woman over 25."

In this instance, it is unnecessary to find an algorithm to solve the problem as we are only going to use the flow chart as a means of simplifying the wealth of information given above (see Fig 2).

So, for example, if you are a married female, it takes only a moment's glance at Fig 2 to answer the questions "Are you a man?" (no) and "are you married?" (yes) to arrive at the knowledge that your annual subscription shall be £4.

You can see from this example how the flow chart helps to clarify and simplify an otherwise apparently complicated problem.

We will now go on to consider the generation of an algorithm, and to see how a flow chart can be drawn once an algorithm has been obtained. As an example,

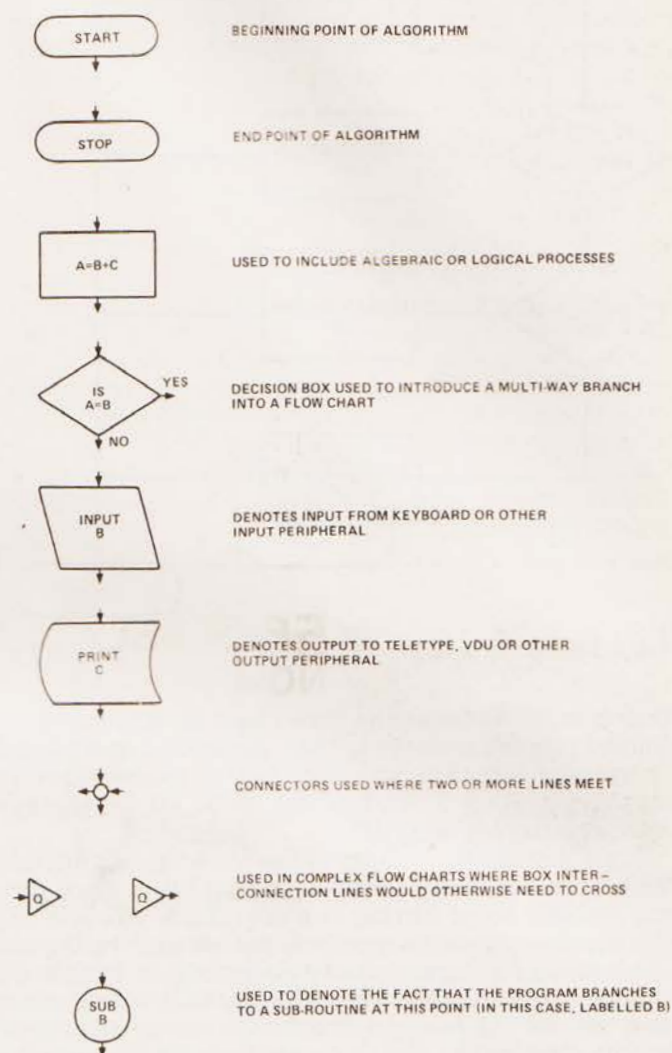


Fig. 1. Flowcharting symbols

we will look at how it might be possible to get a computer to generate a representation of, and randomly shuffle, a pack of cards.

The first thing we need to do is to decide what would be an acceptable representation of the pack. We could reasonably consider the problem solved if the computer could be made to generate a list of the numbers 1 to 52 in a random order, so that each number from 1 to 52 would represent a different card.

The first method that springs to mind is to get the computer to open a set of 52 storage locations. The first random number between 1 and 52 can then be generated and placed in storage location number 1 (the method used to generate the random numbers is

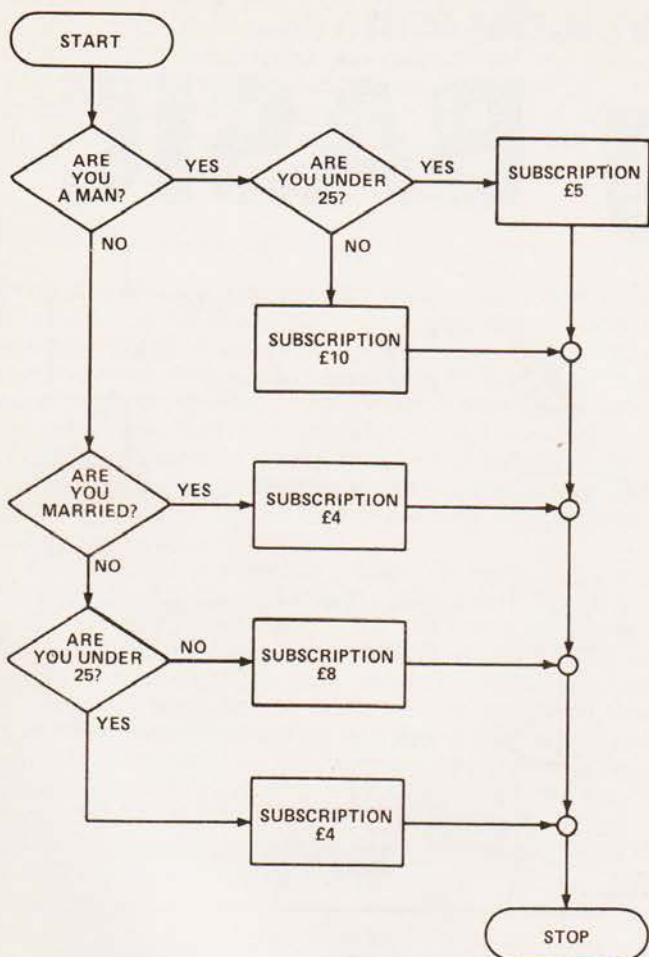


Fig. 2. Fee fie foe or fum?

unimportant as far as the flow chart is concerned). A second random number is then generated and placed in storage location number 2, a third number in storage location 3, and so on until all 52 storage locations have been filled.

Fig 3 shows a flow chart to describe this algorithm. That appeared quite simple, didn't it? But if we give the problem some further consideration, you will see it is possible, since the numbers we are generating are random, to have generated two numbers which are the same. Indeed, this is most likely. This would mean that we would have at least two cards the same within one pack, and so our algorithm must be considered incomplete (though on the right track). To make the algorithm work correctly, we will have to include some form of check to ensure that when a number is generated which has already been used, it is not included in the list (see Fig 4 for a flow chart which takes this point into account). If you look through Fig 4, you will see that a number is generated and then a check is made through all the storage locations that have already been filled to see if the number we have just generated has occurred before. If it has, then the number is ignored and a new random number is generated and checked; if it has not, then it is inserted into the next empty storage location. We then jump back and generate another random number and the process continues until all 52 storage locations have been filled.

This algorithm and subsequent flow chart would appear to be quite sufficient to solve the problem. But

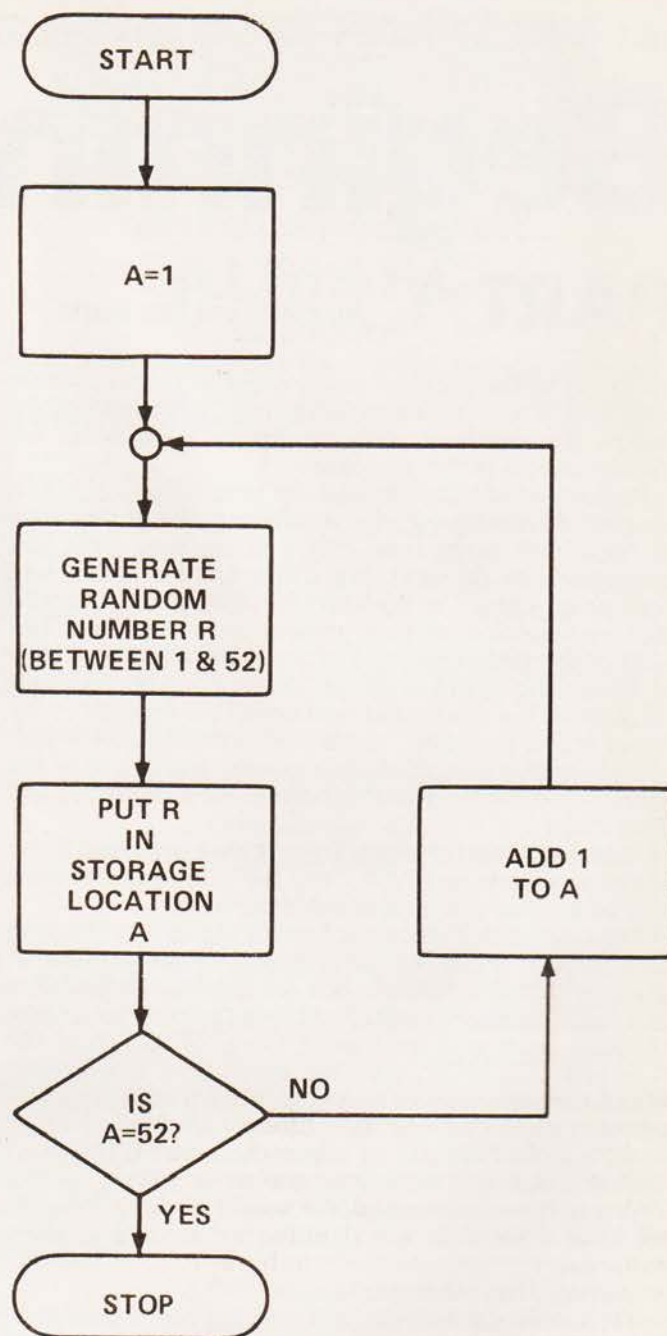


Fig. 3. Take a card, any card . . .

let us now consider this flow chart converted into a program and being run on a computer. Remember, every operation the computer executes takes some finite time to perform, albeit small, so that the more operations that need to be performed, the longer the program will take to run. This may appear to have been an obvious statement, but let us take a look now at our algorithm, bearing this point in mind. When we start off, with all storage locations empty, the first number we generate can be guaranteed not to have occurred before (though looking at the flow chart you will see that the computer does not know this) and can therefore be inserted straight into the first storage location. As the program proceeds, however, and more storage locations filled, it becomes more and more likely that the generated random number will, after some considerable checking, have to be abandoned and re-generated, until, when there are

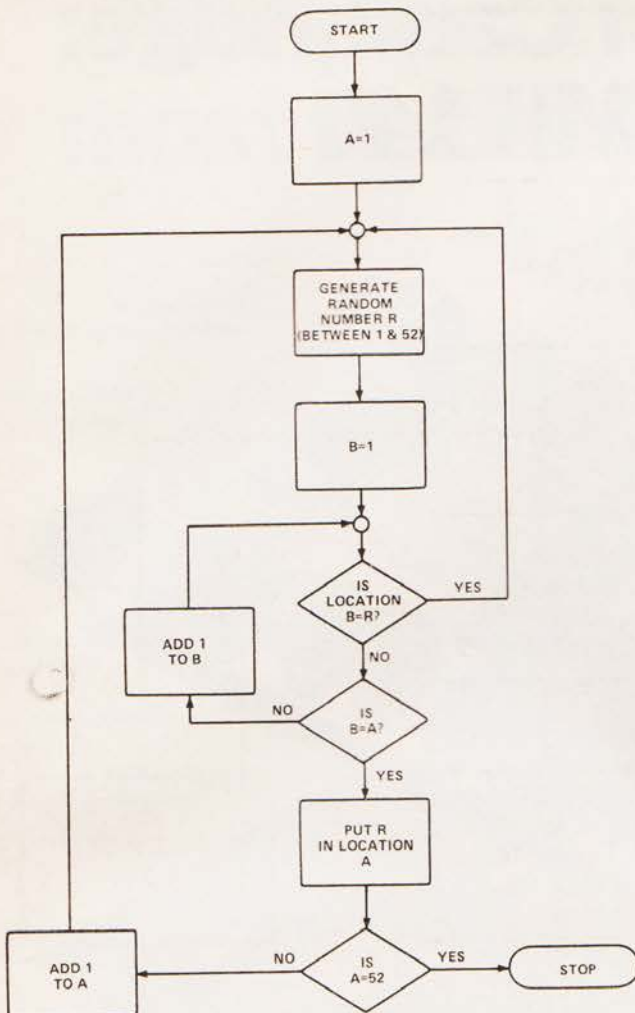


Fig. 4. The new routine.

only two or three locations left to fill, we may have to generate and extensively check many tens of numbers to find one of the few remaining acceptable numbers. If the computer was made to print out each number as it was generated, we would notice a longer and longer time interval elapsing between the generation of consecutive numbers. Problems like this occur frequently when converting algorithms, where a solution which initially appeared to be satisfactory turns out to have some practical difficulties associated with it on closer inspection.

Fig 5 shows the flow chart of an algorithm designed to overcome the previous problem.

It starts by putting 1 in storage locations 1; 2 in location 2; 3 in location 3; and so on until all 52 locations are filled, which in effect lays the cards out in sequence through the pack. It then takes the first location and exchanges its contents with the contents of another randomly chosen location, then the contents of location 2 are exchanged with the contents of a second randomly chosen location; the contents of location 3 are then exchanged with the contents of a third randomly chosen location, and so on until the contents of all 52 storage locations have been randomly exchanged in this manner. You may be a little sceptical as to whether the pack of cards thus generated was truly random. Experiments have, however, convinced us that it is. As you can see, there is never any need to generate more than 52 random numbers, because whatever the number generated

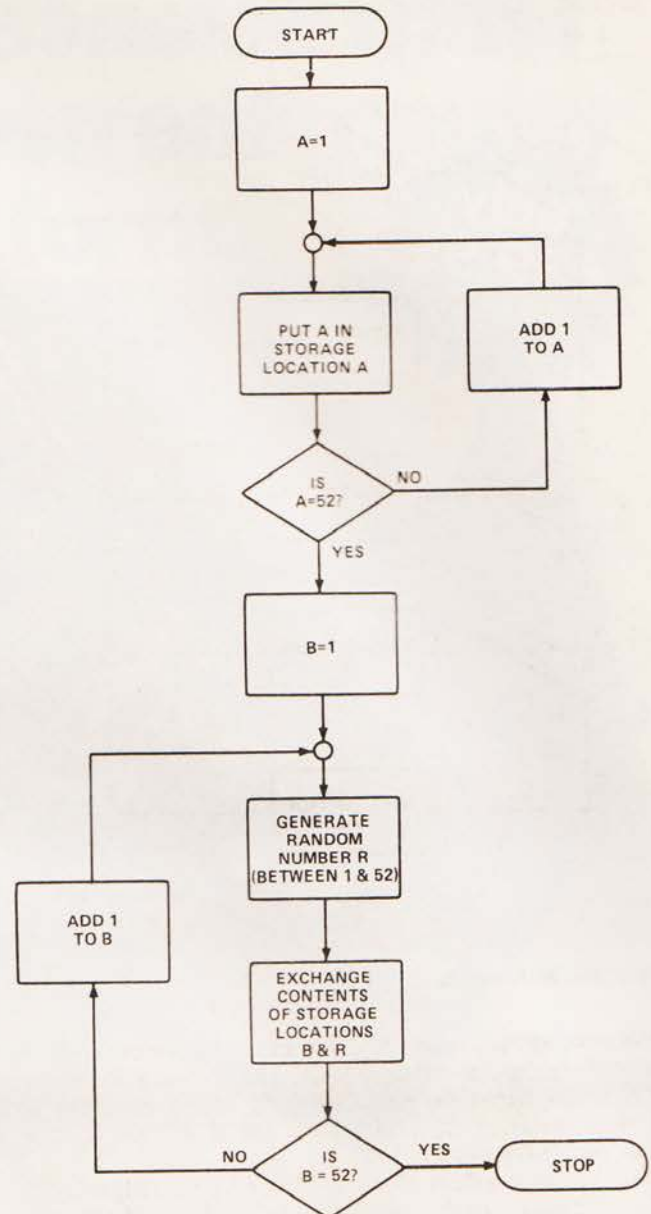


Fig. 5. The British Shuffle?

turns out to be, we are always guaranteed to use it, as it does not matter whether it has been generated before or not. Converting both of these flow charts into programs and running them on a computer, we discovered that this latter algorithm ran approximately ten times as fast, on average, as the first algorithm, so that there is a great saving in computer time used.


Looking through the algorithms and flow charts, you should begin to see that every operation a computer performs has to be very carefully planned and mapped out if a worthwhile program is to result. Although able to operate at extremely high speeds, the computer is merely manipulating pulses of electrical current according to a set of rules which the programmer lays down which, by careful manipulation and interpretation, can be made to have meaning.

Next month we will go on to consider the high-level programming language, BASIC, but do not forget the above routines, for when we have learnt sufficient BASIC, we will be returning to look at them again and see how they can be implemented

CTI

From Science of Cambridge: the new MK 14.

only
£39.95
(+8% VAT)

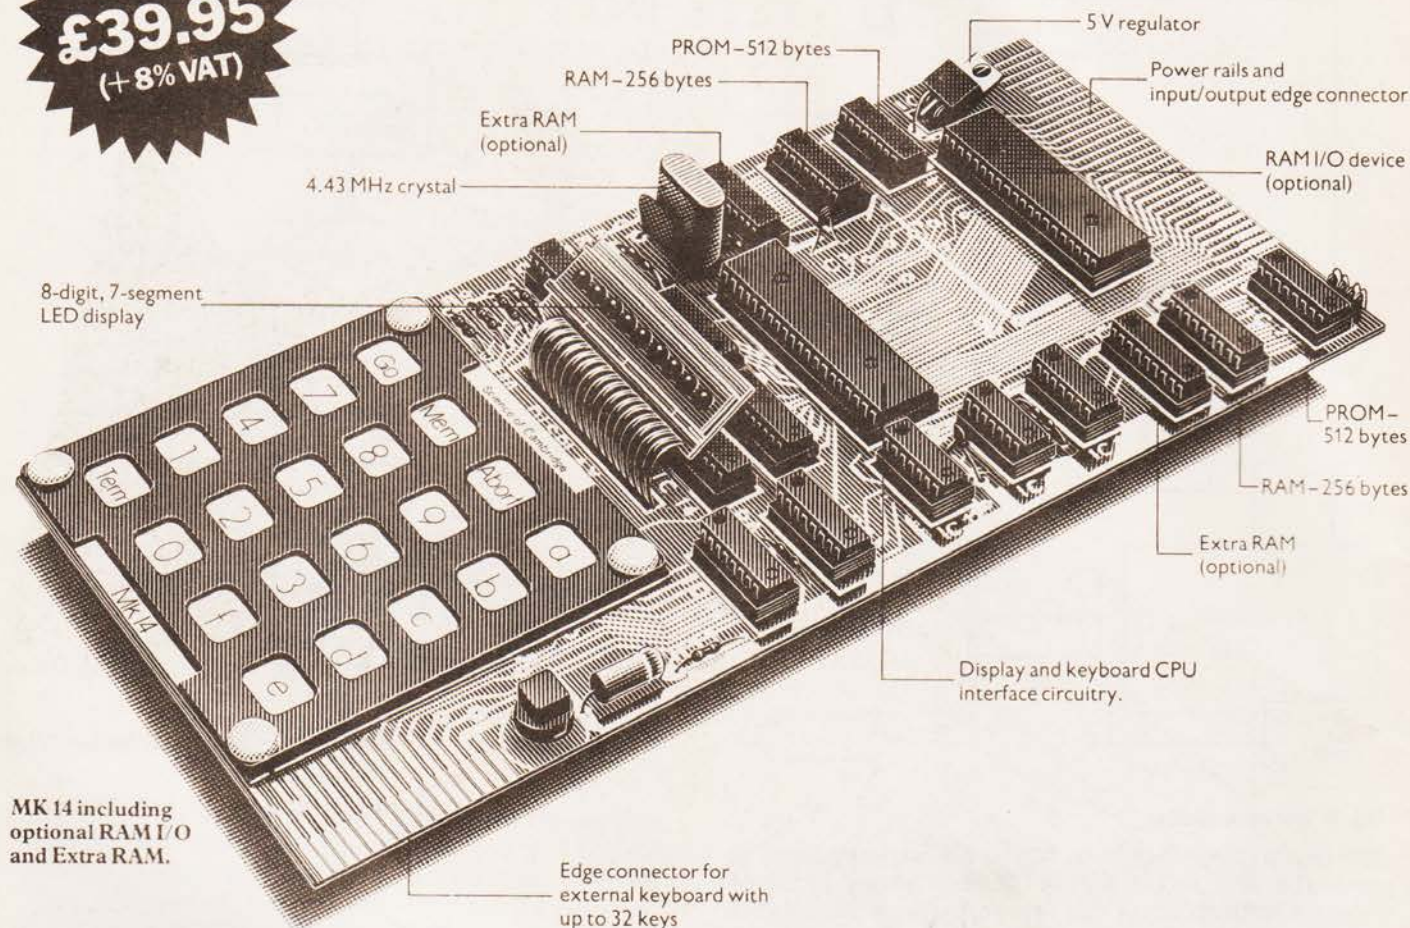

MK 14 including
optional RAM I/O
and Extra RAM.

MK 14 — a complete computer for £39.95 (+8% VAT)

The MK 14 is a complete microcomputer with a keyboard, a display, 8 x 512-byte pre-programmed PROMs, and a 256-byte RAM programmable through the keyboard.

As such the MK 14 can handle dozens of user-written programs through the hexadecimal keyboard. (20 sample programs are provided in the Manual—which also contains comprehensive building instructions, and instructions on program-writing.)

Yet in kit form—which can be assembled by any fairly experienced kit-builder, the MK 14 costs only £39.95 (+£3.20 VAT, and p&p).

But that's only the start . . .

The memory capacity of the basic kit is surprisingly powerful—but every computer owner, from a schoolboy to a multi-national corporation, soon feels the need for more memory.

With the MK14, it's yours!

Optional extras include an additional 256-byte RAM, and a 16-line external input/output device (allowed for on the PCB) which give a further 128 bytes of RAM.

And the next step?

The next step is to add your own peripherals!

The first could be a low-cost module which provides an **interface with a standard cassette-recorder**. This means you can use ordinary tape-cassettes for the storage of data and programs.

To get the best from this configuration, you could uprate your system with a **revised monitor**—consisting of 2 replacement PROMs, pre-programmed with sub-routines for the interface, offset calculation and single step, and single-operation data entry.

The second peripheral could be your own **PROM programmer and blank PROMs** to set up your own pre-programmed dedicated applications. (Fusible-link device guarantees program safety.)

All are available now to owners of MK 14—and remember Science of Cambridge keep you up to date *automatically* with advances in the MK 14 range. A TV interface device is already in the pipeline!

A valuable tool — and a training aid

As a computer, it handles operations of all types—from complex games to digital alarm clock functioning, from basic maths to a pulse delay chain. Programs are in the Manual, together with instructions for creating your own genuinely valuable programs.

And, of course, it's a superb education and training aid—providing an ideal introduction to computer technology.

SPECIFICATIONS

MK 14

- * Hexadecimal keyboard
- * 8-digit, 7-segment LED display
- * 8 x 512 PROM, containing monitor program and interface instructions
- * 256 bytes of RAM
- * 4 MHz crystal
- * 5 V regulator
- * Single 8 V power supply
- * Space available for extra 256-byte RAM and 16 port I/O
- * Edge connector access to all data lines and I/O ports
- Optional Extras**
- * Extra RAM—256 bytes
- * RAM I/O device

Simplest, most advanced, most flexible microcomputer -in kit form.



Cassette interface module and Manual

- * Cassette interface module
- * Revised monitor
- * PROM programmer
- * Blank PROMS

Free Manual

Every MK 14 Microcomputer kit includes a Manual which deals with procedures from soldering techniques, through programming and use of RAM I/O to interfacing with complex external equipment. It contains operational instructions and examples for training applications, and numerous programs including math routines (square root, etc), digital alarm clock, single-step, music box, mastermind and moon landing games, self-replication, general purpose sequencing, etc.

Designed for fast, easy assembly

Each 31-piece kit includes everything you need to make a full-scale working microprocessor, from 15 chips, a 4-part keyboard, display interface components, to PCB, switch and fixings.

The MK 14 can be assembled by anyone with a fine-tip soldering iron and a few hours' spare time, using the illustrated step-by-step instructions provided.

How to get your MK 14

Getting your MK 14 kit is easy. Just fill in the coupon below, and post it to us today, with a cheque or PO made payable to Science of Cambridge. And, of course, it comes to you with a comprehensive guarantee. If for any reason, you're not completely satisfied with your MK 14, return it to us within 14 days for a full cash refund.

Science of Cambridge

Science of Cambridge Ltd,
6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Telephone: Cambridge (0223) 311488

To: Science of Cambridge Ltd, 6 Kings Parade, Cambridge, Cambs., CB2 1SN.

Please send me the following, plus details of other peripherals:

- ☐ MK 14 Standard Microcomputer Kit @ £43.55 (inc 40p p&p.)
- ☐ Extra RAM @ £3.88 (inc p&p.)
- ☐ RAM I/O device @ £8.42 (inc p&p.)

I enclose cheque/money order/PO for £_____ (indicate total amount.)

Name _____

Address (please print) _____

Allow 21 days for delivery.

The exciting
new
Triton computer
from

TRANSAM



Complete kit
available
immediately
for only £286 + VAT

The first
British-designed
home computer kit
with basic IN ROM
and graphics.
The single-board
design makes the
computer easy to
construct, and
when complete,
a very compact and
powerful tool for
home, educational
and industrial use.

Building a better computer wasn't easy —
but we did it.

TRANSAM

HAS A FULL RANGE OF MICROS
AND SUPPORT, PLUS SOFTWARE

TRANSAM

BRINGS YOU "MEMORY BANK"
A FULL MEMORY SERVICE

TRANSAM


TRANSAM COMPONENTS LTD.
12 CHAPEL STREET
LONDON NW1. TEL: 402 8137

NEXT TO EDGWARE ROAD TUBE STATION 'MET' LINE
TRITON COMPUTER IS THE TRADE MARK OF
TRANSAM COMPONENTS LTD.

All components can be
bought separately and
a fully comprehensive
Triton manual is
available for £5
or send 30p + SAE for
our latest catalogue
and price list.

This unit allows you to program your microprocessor from a prerecorded cassette or to record your own program for later use. Design by Trevor Marshall.

CUTS Cassette Interface

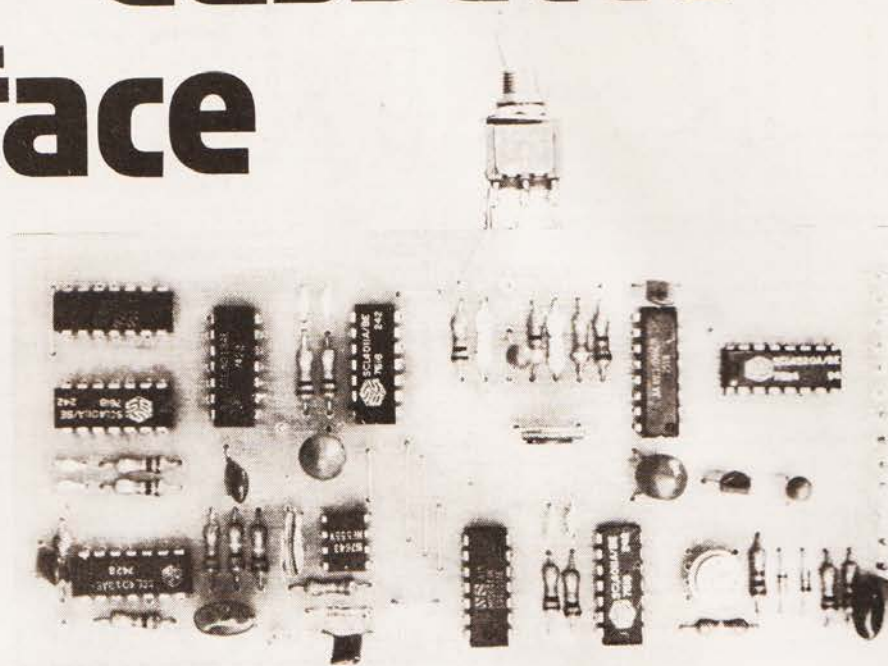

REPEATEDLY TYPING IN programs is not what hobby computing is about. Although most systems start life without any form of off-line mass storage, as more memory is added so more programs are written and the need for some form of storage becomes more pressing. The ideal device for this job is probably the floppy disk, but this is (a) expensive and (b) usually dedicated to one processor or bus structure. Many hobbyists are running several small systems, and a device which is less convenient but more suited to their needs (and pockets) is the humble cassette recorder.

This interface is designed to convert the digital signals from your computer to audio tones and back again, using a standard system called CUTS (Computer Users' Tape System), which is also referred to as the Kansas City or Byte format. This records data at 300 baud, with a logic '1' recorded as eight cycles of 2400Hz and a '0' as four cycles of 1200Hz. A byte of data is recorded as a start bit of logic '0', followed by eight bits of data and two stop bits of logic '1', and this is taken care of by the UART in your computer.

Although the standard is 300 baud, the monitor programs in some kits allow only 110 baud operation, and this interface will work at 110 baud. It can also be run faster (up to 1200 baud) to allow faster program loading.

We have not described a case, as most constructors will wish to mount the board either on the back panel of their computer or in the VDU. Also switching between VDU and cassette will depend upon the user's computer — the ideal situation is to have two UARTs for both VDU and cassette, but many systems (or rather their monitors) do not permit this.

Construction

This is simply assembling the PC board. Take care when handling the ICs as most are CMOS. As the unit will probably be built into a system we have not given any mechanical assembly details. The record/play switch can be mounted remotely if desired.

Alignment

The only adjustments on the unit are the record frequency and the


monostable period. Switch the unit to record and monitor the frequency at any of the baud rate outputs and adjust RV2 to give the correct frequency. Now inject a 1200 Hz tone into the audio input (take of from the baud rate outputs when in the record mode) and adjust RV1 to give a 300us wide pulse at pin 3 of IC4. If an oscilloscope is not available, setting RV1 to mid position should be close enough.

Recording

For best results recording should be done at a relatively low level. We found that about -7VU gave the best results.

Unfortunately the use with a recorder with an automatic level control did not prove satisfactory. This is because the level control logic is designed for music where the peak level is about 10dB or more higher than the average. This cannot cope with a continuous tone without it being recorded at too high a level.

One method which has been suggested to us is to record a high level high frequency tone (about 18kHz) as well as the signal. Theory ►►►

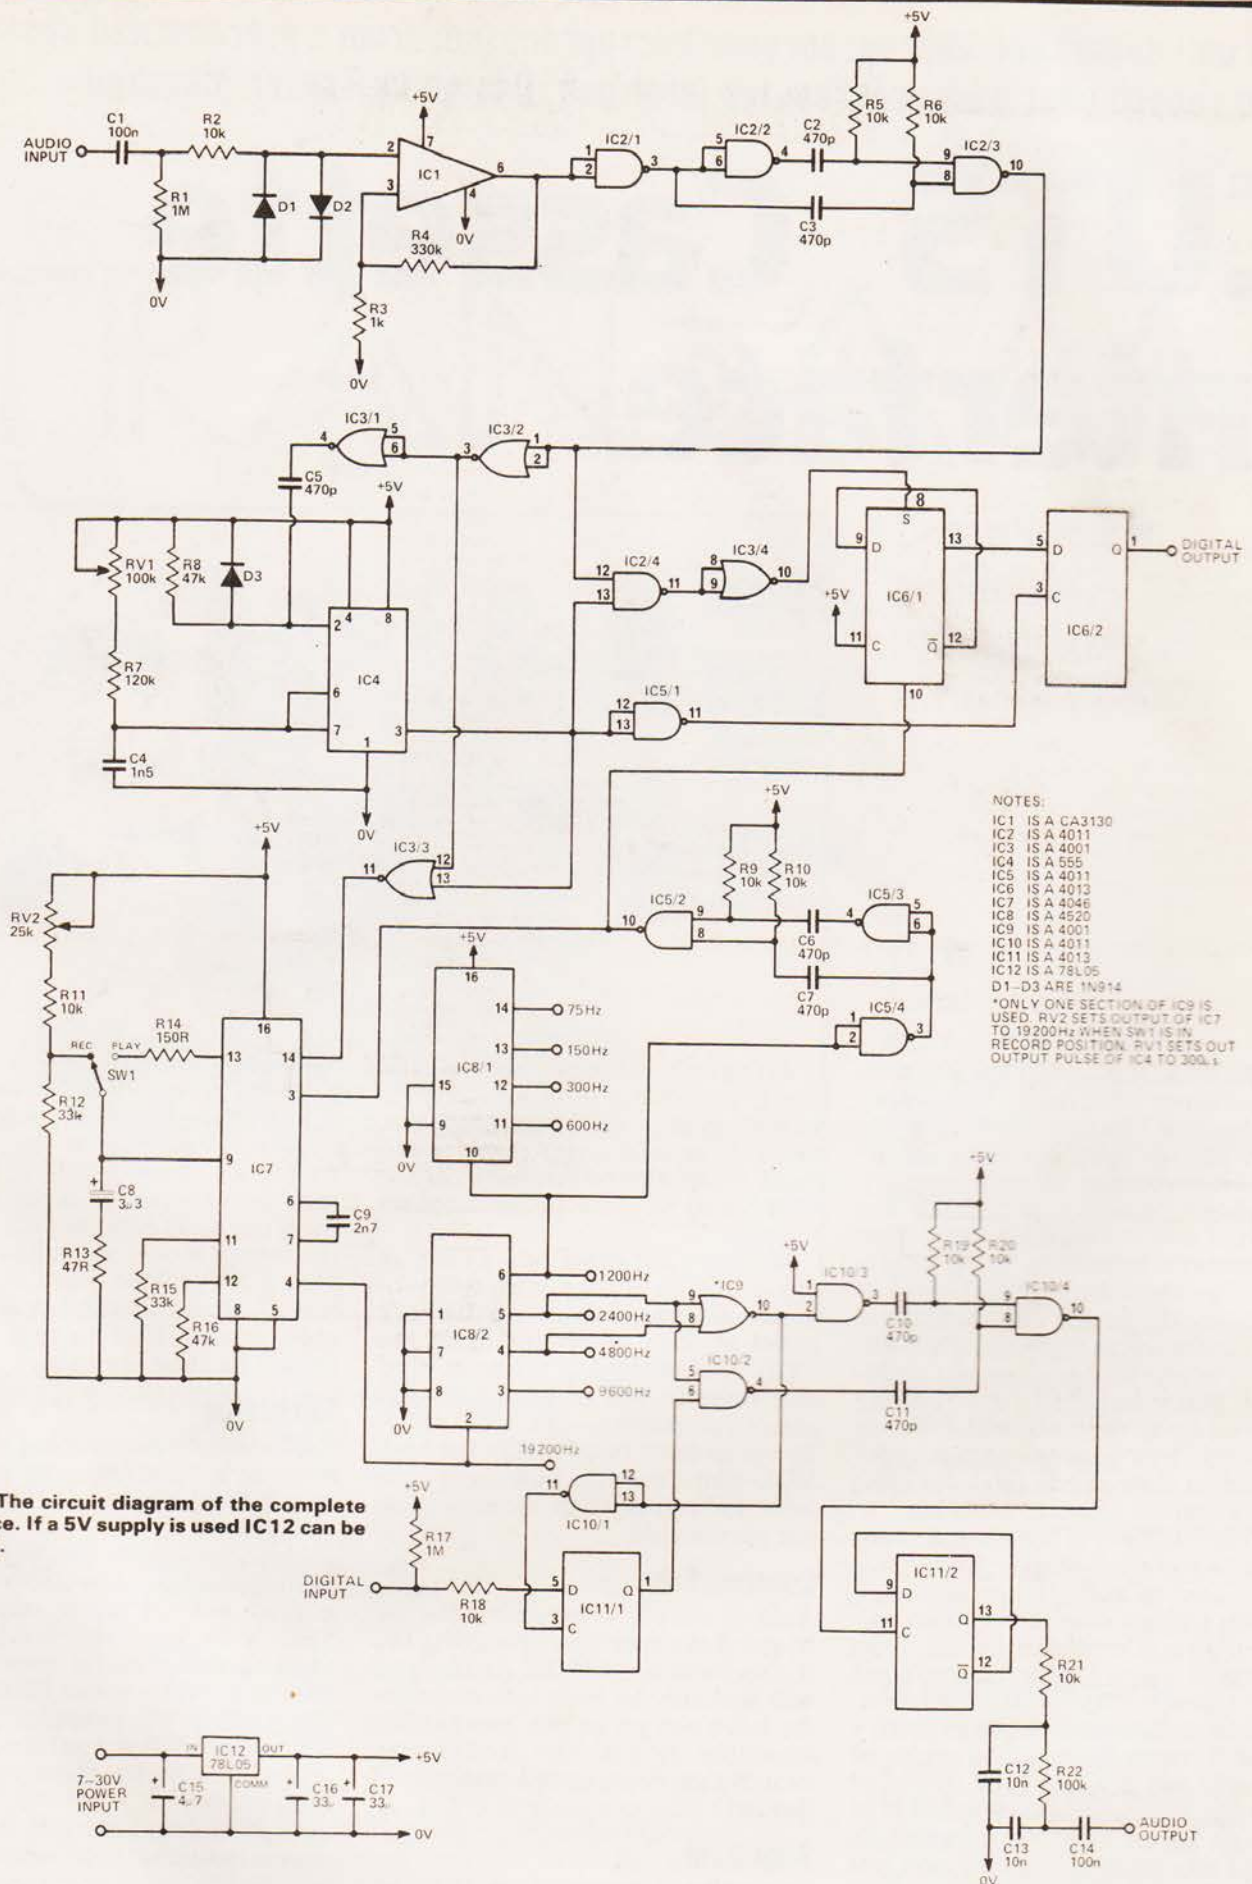

How It Works

This unit records digital information on tape in serial form using two tones, 2400 Hz for a "1" and 1200 Hz for the "0". The standard transmission rate is 300 baud but it will work equally well at 600 baud. The designer has operated his unit at 1200 baud with success but with only one cycle of 1200 Hz per bit it is more prone to dropout, etc.

Decoder

We will start the explanation of how it works by assuming you have a prerecorded tape. The output of the tape recorder (alternate tones of 1200 and 2400 Hz) is "squared up" by IC1 which is connected as a schmitt trigger with R3 and R4 providing the necessary positive feedback.

The gates IC2/1, IC2/2 and IC2/3 are used to generate a positive pulse about 3 μ s wide on both the leading and trailing edges of the output of IC1. This gives a series of pulses at either 2400 Hz or 4800 Hz (417 μ s or 208 μ s period).

The pulse chain triggers the monostable IC4 which is 300 μ s wide. If a second trigger pulse occurs before the 300 μ s period (as it will if the input is 4800 Hz) the second pulse is simply ignored. The input pulse chain is gated with the monostable output in IC3/3, the resultant output being pulses at 2400 Hz

whether the input frequency is 2400 or 4800 Hz.

These pulses are used for the reference for the phase locked loop (PLL) IC7. This IC contains a phase detector and a voltage controlled oscillator. The output of the oscillator is divided by 2⁸ in IC8. After dividing by 2⁴ (16) IC5/2, IC5/3 and IC5/4 are used to generate 3 μ s wide pulses on both leading and trailing edges and this output is the second input to the phase detector in IC7. The output of the phase detector (pin 13) is used to control the oscillator (input is pin 9) and the two pulse chains are equalised in frequency and phase. Using this technique the tape speed can be varied by up to $\pm 20\%$ and the PLL will track it. The outputs of IC8 can be used to control the UART in the computer. If the UART's own clock is used the allowable tape speed variation is $\pm 5\%$.

To decode the pulse chain into "1" and "0" and to ensure correct phasing, IC2/4, IC3/4, IC5/1 and IC6 are used. The monostable IC4 is triggered at 2400 Hz, and its output clocks the D input of IC6/2 into the output. IC6/1 is used as an R-S flip flop being "set" if a pulse from IC2/3 occurs during the "mono" period (if the input is high frequency) it is reset every 417 μ s by IC5/2. However, the information is clocked

into IC6/2 before the reset pulse occurs. If the input is only a 1200 Hz tone the set pulse does not occur and a "0" is strobed into IC6/2. An examination of the timing diagram in fig. 1 will help clarify the sequence.

Encoder

The encoder is a little more complex than needed for 300 baud, but it allows operation at 600 or 1200 baud if needed. The output of IC9, which is a non-symmetrical 2400 Hz, triggers a 3 μ s monostable IC10/4 which then toggles IC11/2 giving a 1200 Hz square wave output. However, if the "data input" is a "1", IC11/1 is toggled to give a "1" at pin 1 which enables IC10/2. This then triggers the monostable IC10/4 midway between the pulses due to IC9. This then toggles IC11/2 at twice the rate to give 2400 Hz output. The clocking of the data input into IC11/1 is about 100 μ s out of phase with the rest of the timing to give time for the UART to settle, eliminating any errors due to propagation delays.

The phase locked loop IC is used only as an oscillator in the transmit mode and the VCO input is switched to a preset voltage giving the correct frequency.

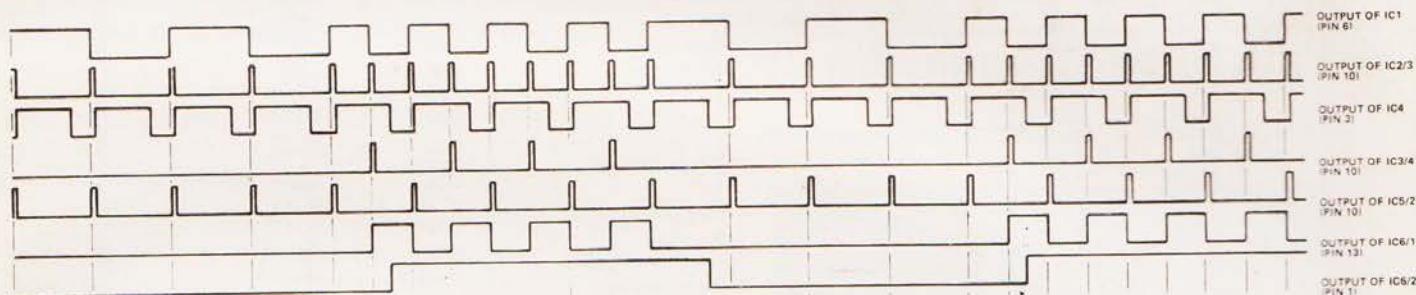


Fig. 2. The sequence of events in the decoder when receiving a '0,1,0,1' input.

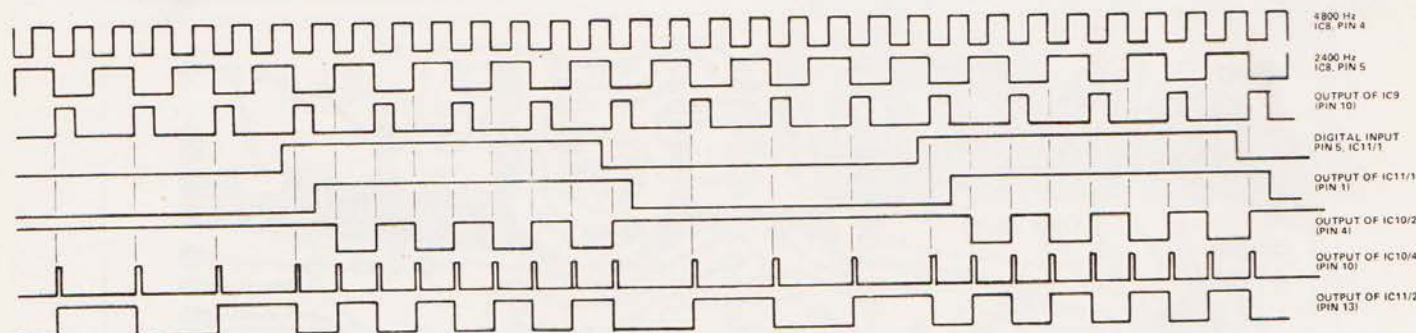


Fig. 3. The encoder waveforms when transmitting a '0,1,0,1'.

is that this tone will adjust the automatic level control while being too high to be reproduced. However it can beat with the bias oscillator causing more problems than it

solves.

We therefore recommend that the unit be used only with a recorder with a manual recording control.



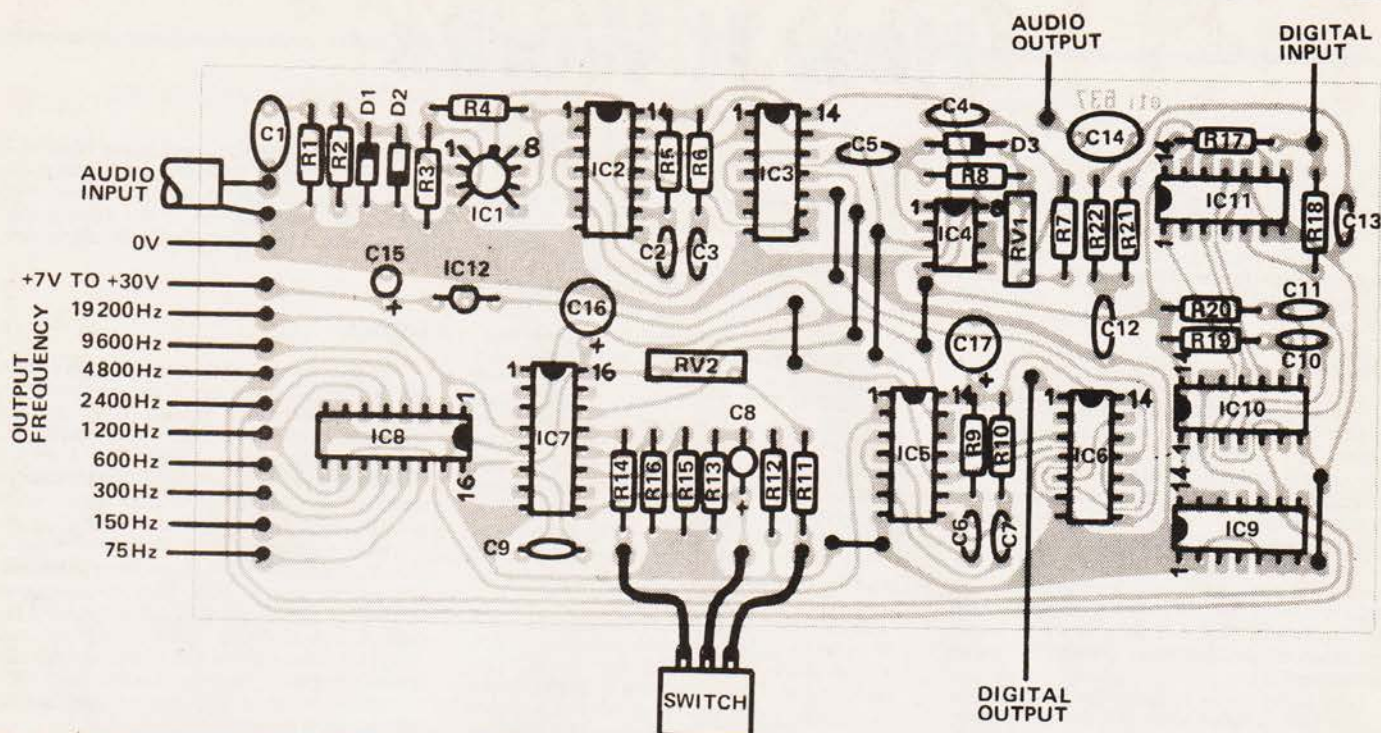


Fig. 4. The component overlay. When using a 5V supply leave out IC12 and add a link between the two outside holes. C15 can also be deleted.

Parts List

RESISTORS (All 1/2w 5%)

R1	1M
R2	10k
R3	1k
R4	330k
R5,6	10k
R7	120k
R8	47k
R9-R11	10k
R12	33k
R13	47R
R14	150R
R15	33k
R16	47k
R17	1M
R18-R21	10k
R22	100k

POTENTIOMETERS

RV1	100k trim
RV2	25k trim

CAPACITORS


C1,14	100n polyester
C2,3,5,6,7,10,11	470p ceramic
C4	1n5 polyester
C8	3u8 25V electrolytic
C9	2n7 polystyrene
C12,13	10n polyester
C15	4u7 35V electrolytic
C16,17	33u 10V tantalum

SEMICONDUCTORS

IC1	CA3130
IC2	4011
IC3	4001
IC4	555
IC5	4011
IC6	4013
IC7	4046
IC8	4520
IC9	4001
IC10	4011
IC11	4013
IC12	78L05
D1-D3	1N914

MISCELLANEOUS

PCB as pattern
SW1 SPDT toggle

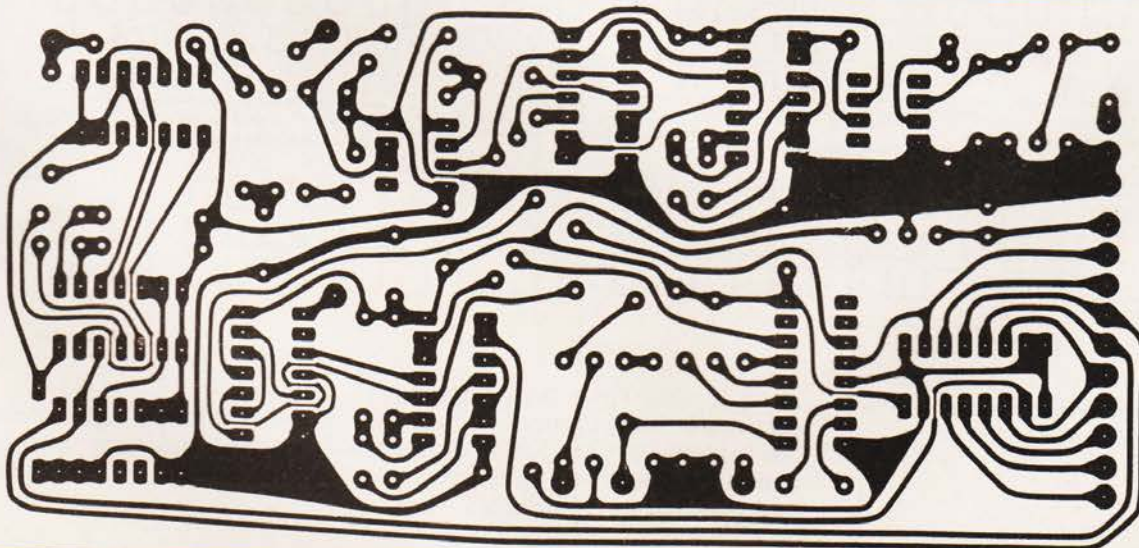

TRITON

John Coll, PCW consultant and well known to the computer hobbyist gives his impressions of the TRITON

I've had an early production model of the Triton for some time and I've been most impressed with it and with ETI's approach to the project.

On the hardware side it's clear that the designer Mike Hughes is a professional. The PCB is cleanly designed and good provision has been made for expansion at a future date. The addition of extra memory and of peripherals like printers and floppy disks will be a straight forward process. Whilst economy has been very much borne in mind. There has been no skimping, everything you need is provided to make a simple useful computer using a normal TV set as a display. The fact that where tracks have to go near IC pins, the tracks have been put on the upper side of the board — away from the constructors soldering iron — is typical of the attention to detail which is evident throughout the design.

On the software front the 2K basic interpreter is Li Chen Wang's Palo Alto tiny BASIC which has been around for some time and is therefore pretty much bug free, ie it works.

The monitor on the other hand is very much a version one — it works but could be improved considerably. However, this does not worry me in the slightest because all the software is in EPROM and therefore can be easily and cheaply altered. It is difficult to explain just how important that is — it means that users will be able to return the monitors to Transam and get them reprogrammed with the latest software for a very reasonable sum. It also means that if you want to use the computer for something else you can remove the BASIC and use the whole 4K of EPROM for your special application. This makes the machine potentially important in the process control field.

The documentation is good, however it seems only fair to say that the TOTAL novice would probably find it difficult to diagnose and repair any obscure fault. However, Transam's 'Get it going' service should deal with that in a satisfactory way. The availability of full source listings for both the monitor and BASIC will be useful in specialists applications as well as for the enthusiastic beginner.

It is clear that ETI are determined to 'Get this one right' and to support it in the future with further software and hardware.

I have no hesitation in recommending this kit to you.

LIVERPOOL'S COMPUTER SHOP

Quality C15 cassettes for your PET, Apple, TRS80, NASCOM 1, etc.

10 cassettes for **£4.75** including P. & P., V.A.T., labels and library cases.

Science of Cambridge MK14. Socket Set. 5 × 14 pin, 7 × 16 pin, **£3.84** including P. & P. and V.A.T. Power Supply **£4.86** including P. & P. and V.A.T.

Barclaycard and Access accepted.



MICRODIGITAL LTD.
25 BRUNSWICK STREET
LIVERPOOL L2 0BJ
Tel: 051-236 0707


MICRODIGITAL



NEWBEAR COMPUTING



Announcing the SYM-1:-from Synertek
(formerly VIM-1)

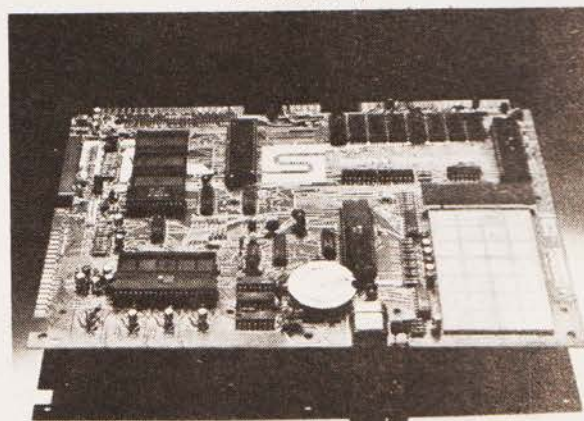

- ★ Fully assembled and tested
- ★ K1 M.I. compatible.
- ★ High speed cassette interface (2400 baud)
- ★ 1K byte storage, expandable on board to 3K byte
- ★ 4K byte ROM Monitor
- ★ Fully expandable and much much more

£199.00 plus 8% VAT £1.00 postage and packing

For further details: Visit Newbear Computing Store, 2 Gatley Road, Cheadle, Cheshire, 061-491 2290. Or visit, or write to Newbear Computing Store, 7 Bone Lane, Newbury, Berks. 0635 49223. Send for Catalogues of Hardware Components, Literature and Software.



Room ETI/11
313 Kingston Road, Ilford
Essex IG1 1PJ, England
01-553 1001

L.P. ENTERPRISES

From the representatives in Europe... for America's leading Micro-computer magazines and books, for the hobbyist, educationist and professional alike, we bring you a little light browsing!

Reading maketh a full man... Francis Bacon (1561-1626)

Tick or indicate quantity ordered.		Price UK	Price Overseas If Different
From Adam Osborne Associates			
INTRODUCTION TO MICROCOMPUTERS			
Volume 0: The Beginners Book		£5.95	
Volume 1: Basic Concepts		£5.95	
Volume 2: Some Real Products (Revised Late 1977)		£11.95	
6800 Programming for Logic Design		£5.95	
8080 Programming for Logic Design		£5.95	
Z80 Programming for Logic Design		£5.95	
8080A/8085 Assembly Language Programming		£6.95	
6800 Assembler Language Programming		£6.95	
Some Common BASIC Programs		£5.95	
BUSINESS PROGRAMS IN BASIC			
Payroll With Cost Accounting		£9.95	
Accounts Payable & Accounts Receivable		£9.95	
General Ledger (Available from late summer 78)		£9.95	
From Scelbi Computer Consulting Inc.			
6800 Software Gourmet Guide & Cookbook		£7.95	
8080 Software Gourmet Guide & Cookbook		£7.95	
8080 Programmers Pocket Guide		£2.25	
8080 Hex Code Card		£2.25	
8080 Octal Code Card		£2.25	
8080 Guide and One 8080 Code Card		£4.20	
8080 Guide and Both Code Cards		£6.00	
Understanding Microcomputers & Small Computer Systems		£7.95	
SCELBI 'BYTE' Primer		£9.95	
8080 Standard Assembler (In Block Format)		£15.95	
8080 Standard Editor (In Book Format)		£9.95	
8080 Standard Monitor (In Book Format)		£9.95	
From Peoples Computer Company			
Reference Books of Personal & Home Computing		£4.95	
What to Do After You Hit Return		£7.00	
Dr. Dobbs Journal Volume 1		£10.00	
*From Kilobaud/73 Magazine Inc.			
Hobby Computers Are Here		£3.95	
New Hobby Computers		£3.95	
From Dymax Inc.			
Instant BASIC by Jerald R. Brown		£4.95	
Your Home Computer by James White		£4.95	
My Computer Like Me... When I Speak			
BASIC By Bob Albrecht		£1.65	
Games With A Pocket Calculator by Thiagarajan & Stilovitch		£1.75	
Games, Tricks and Puzzles For a Hand Calculator by W. Judd		£2.49	
*From BYTE Publications Inc.			
Paperbytes:			
Tiny Assembler for 6800 Systems		£5.75	
Bar Code Loader for 6800, 8080, Z80 & 6502 Micros		£1.75	
Best of Byte Volume 1		£8.95	
Tick or indicate quantity ordered			
* From Creative Computing Press			
Best of Creative Computing Volume 1		£6.95	
Best of Creative Computing Volume 2		£6.95	
BASIC Computer Games			
(A revised 101 BASIC Games)		£5.50	
The Colossal Computer Cartoon Book		£3.95	
Computer-Rage (A new Board Game)		£6.95	
Artist and Computer		£3.95	
* From Everyone Else			
Magazine storage boxes (hold 12 minimum)		£1.25	
Sybox: Microprocessors from Chips to Systems			
by R. Zacs		£7.95	
Sybox: Microprocessors Interfacing Techniques			
by R. Zacs		£7.95	
Dilithium: Home Computers			
Volume 1: Hardware		£6.50	
Dilithium: Home Computers			
Volume 2: Software		£5.95	
Getting Involved With Your Own Computer		£4.75	
The Z80 Microcomputer Handbook		£7.50	
TV Typewriter Cookbook by Don Lancaster		£7.50	
TTL Cookbook		£7.95	
CMOS Cookbook		£7.95	
IC Timer Cookbook		£7.50	
IC OP-AMP Cookbook		£9.50	
RTL Cookbook		£4.25	
Computer Programs that Work (in BASIC)		£2.55	
* From Basic Software Library			
(from Scientific Research Instruments)			
Vol 1: Business and Personal Booking Programs		£17.50	
Vol 2: Maths and Engineering Programs		£17.50	
Vol 3: Advanced Business Programs		£26.50	
Vol 4: General Purpose Programs		£7.95	
Vol 5: Experimenters Programs (General Purpose)		£7.95	
Vol 6: General Ledger Program		£32.50	
Vol 7: Professional Programs		£26.95	
Magazines: Back Issues			
Personal Computing		£1.75	
Interface Age		£2.25	
Dr. Dobbs Journal		£1.75	
Computer Music Journal		£2.50	
Peoples Computers		£1.75	
*BYTE		£2.25	
Creative Computing		£1.75	
Calculators & Computers		£1.75	
ROM		£1.75	
Kilobaud		£2.25	
73		£2.00	
MAGAZINES: Subscriptions			
Personal Computing (Twelve Issues Yearly)		£16.00	£17.00
Interface Age (Twelve Issues Yearly)		£20.00	£20.50
Dr. Dobbs Journal (Ten Issues Yearly)		£13.00	£13.50
Computer Music Journal (Four Issues Yearly)		£8.50	£9.00
Peoples Computers (Six Issues Yearly)		£8.00	£8.50
Kilobaud (Twelve Issues Yearly)		£20.00	£21.00
BYTE (Twelve Issues Yearly) via USA		£15.00	
BYTE (Twelve Issues Yearly) via UK		£21.00	
Creative Computing (Six Issues Yearly)		£8.50	£9.00
Creative Computing (Twelve Issues Yearly)		£16.00	£17.00
Calculators & Computers (Seven Issues Yearly)		£10.00	£10.50
73 (Twelve Issues Yearly)		£20.00	£21.00

HOW TO ORDER

Please note our prices include postage and packing, but not insurance, if wanted add 12p for every £10 of books ordered. Make cheques, P.O.'s etc payable to

L.P. Enterprises
CREDIT CARDS accepted
BARCLAYCARD VISA / ACCESS
DINERS CLUB / AMERICAN EXPRESS

Phone: 01-553 1001 for Credit Card orders (24 hour service).

Due to fluctuations of the dollar, prices are subject to change

Send to address above for the attn. of David, Dept. ETI/11
Indicate Payment Method:

..... My cheque, P.O., I.M.O. is enclosed in Sterling on U.K. Bank

..... Charge to Barclaycard/Visa/Access/Diners/American Express

Credit Card No. Expiry date

Name

Address

..... POSTCODE

Signature

All Orders must be Prepaid
Total Enclosed £

All publications are published in U.S.A. and shipped air-freight by L.P. Enterprises. In unusual cases, processing may exceed 30 days
*BYTE subscriptions are processed IN USA and are air-freighted & posted from Amsterdam and will take 3 months to start.

ETI/11/78

U.K. Subscriptions start within three weeks

TRADE ENQUIRIES WELCOME

East Coast Report

Proclaimed as the largest show ever, Personal Computing '78 was held in the Philadelphia Civic Centre, from the 24th to 27th of August. Computing Today roving reporter Jim Perry was there with his box brownie.

With more than 300 stands and over 100 exhibitors the PC '78 show certainly was large by any standards! To celebrate its third birthday the show had moved to the Philadelphia Civic Centre from its birthplace in Atlantic City. The move of venue was brought about by the tremendous growth in attendance — Atlantic City was just too small for this year's show!

The promoters of the event claim that just over 20 per cent of the American Personal Computer Market is within 2 hours drive of Philadelphia, this is probably because New York is just 2 hours away.

Amongst the many exhibitors there were surprisingly few new products — well, new to the American market at least — most of the products would be new in the UK if available here. With companies such as Heathkit, Radio Shack (Tandy) and Southwest Technical Products in attendance, it was Commodore that was conspicuous — by its absence.



To complement the exhibition the organisers had arranged more than 80 hours of seminars, on everything from business systems to computer games. A good point was that all the daytime events were included in the exhibition admission fee. Other activities included a show of computer generated art, a computer music evening and traditional Saturday night banquet (read booze up).



General view of the main exhibition area, early on the first day.



Not quite what you expect at a Personal Computer Show, but a lot of people were looking for complete systems for small businesses.




Software for the TRS 80 was available from many suppliers. This stand is demonstrating a chess recorder program.




The RCA stand was dedicated to their COSMAC VIP, the two small boards plugged into the back are the new music synthesiser and drum machine attachments.



Computer music was the theme on the SOL stand. The interface, between man, machine and music is one of the exciting growth areas.

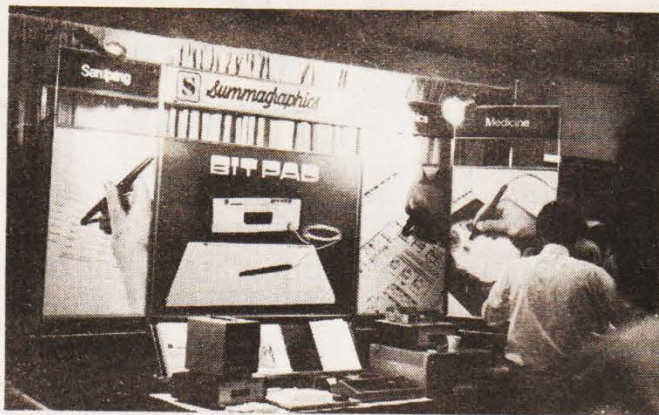

The Bit Pad is a rather nice (but expensive) device for turning freehand into computer input.

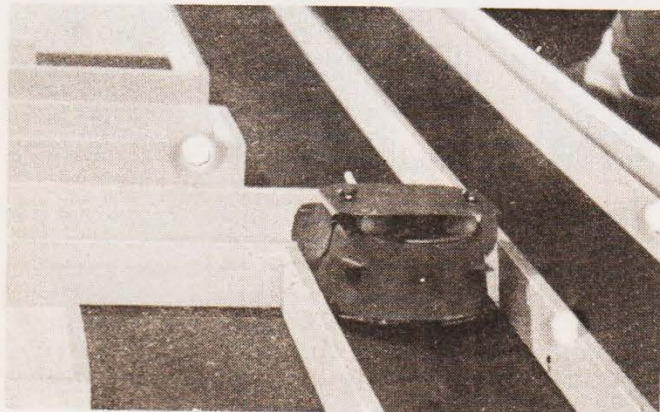

Is it a bird? Is it a plane? No, it's a Micro Mouse! The second trials for the IEEE/Spectrum Micro Mouse Maze competition were held during the exhibition — this MPUed mouse made it through the maze in 4 minutes 45 seconds.



Computalk Consultants did a roaring trade with their versatile speech synthesis units.



The message centre used SWTP equipment to keep everybody up to date via several monitors.



The Radio Shack (Tandy) area was equipped with 12 TRS 80 systems, the complete range of peripherals (printers, floppies etc) was also on continuous demonstration.



Part of the British contingent, Chris Carey and Jim Wood from Comp Computer Components were scouting for new products to unleash on the UK market.



Exidy were demonstrating the Z80 based Sorcerer Computer — a nice feature of this machine is the plug in BASIC, which can be replaced with various other languages virtually instantly.

The TRITON software has some interesting facilities — we take a look at the whole package.

TRITON Software

—BASIC

The TRITON BASIC Interpreter was designed to run on small 8080/Z80 micro processor systems. It contains many of the common BASIC commands and most small BASIC programmes will be easily converted to run on the Triton.

Variables

All variables and numbers are stored as 16 bit integers and therefore must lie in the range —32767 to 32767. There are 26 variables each denoted by a single letter A to Z. There is 1 array denoted by @, this array is automatically dimensioned to make use of any memory space left unused by your BASIC Programme. The number of bytes of memory space in this array can be obtained at RUN time using the SIZE function.

Functions

There are three functions available.

- ABS(X) which gives the absolute value of the variable X.
- RND(Y) which gives a random number between 1 and Y inclusive.
- SIZE which gives the number of bytes left unused by your programme.
Hence the maximum index for the array @ () is SIZE/2.

Arithmetic Operators

- + Add
 - Subtract
 - * Multiply
 - / Divide
- +, —, * and / operations must result in a value in the range —32767 to 32767 and as they are also integer, any division is rounded down. E.G. 5/2 gives 2, 2/3 will give 0.

Compare Operators

- > greater than
 - < less than
 - = equal to
 - ≠ not equal to
 - >= greater than or equal to
 - <= less than or equal to
- The compare operators are usually used with the IF command but can also be used in expressions. The result of any comparison is 1 if true and 0 if not true (false).

Expressions

Expressions are formed from number, variables and functions.

E.G. 10 LET A = 10 A is set to 10
20 LET B = A B is set to contents of A ie 10
Arithmetic operators are used in expressions and are evaluated from left to right, except that * and / are always evaluated first.

Spaces between numbers, variables and functions are ignored. Spaces inbedded in command words are not allowed.

Parentheses can be used to change the order of evaluation.

Parentheses can be nested, the maximum depth being limited by the size of the stack.

Conditional operators are usually found with the IF command.

10 IF A = 1 B = B + 1

In this statement when A is equal to 1 the expression B = B + 1 is executed and one is added to the contents of B.

Conditional expressions can be combined to form multiple conditions and can also be used in arithmetic expressions.

Statements

A BASIC statement consists of a statement number between 1 and 32767 followed by one or more commands. If a statement contains more than one command, each command is separated by semi colon ;. The statement is ended by a carriage return.

10 LET A = 10
20 LET B = A
30 LET C = A + B

This can be written

10 LET A = 10; LET B = A; LET C = A + B

It should be noted that the latter method will be harder to change or correct.

The commands GOTO, STOP and RETURN must be the last command in any statement.

Commands

The following commands are available in the TRITON BASIC L4.1

LET

LET is used to set a variable to the result of an expression.

10 LET A = 10 The variable A is set to 10
20 LET B = (A-1)*2
*2 The variable B is set to the result of the expression (A-1)*2 i.e. 18

30 LET @ (3) = B/3 The fourth element of the array @ is set to 6 (The first element is @ (0))

The expression need not be an arithmetic expression.
10 LET C = A ≠ B If A equals B, C will be set to zero
If A is not equal to B, C will be set to one

The LET command can be used to set several variables

10 LET A = 1, B = 2, C = 3
each part being separated by a comma,
We can therefore rewrite an earlier example.
10 LET A = 10, B = A, C = A + B

Rem

The REM (Remark) Command allows the programmer to comment his programme. The interpreter will ignore the rest of the line.

100 REM THIS IS THE START OF THE SUB-ROUTINE Y = A*A + B



Print

The PRINT command is used to print numbers, variables, expressions, and text.

10 PRINT A will print the contents of variable A

10 PRINT A*2 prints twice the contents of variable A

10 PRINT 'THIS IS A TITLE' prints THIS IS A TITLE

Several variables, etc. can be printed at once. Each item to be printed is separated by a comma.

10 PRINT A,B,C will print the contents of A followed by B and C on the same line.

Text can be used to qualify printout.

10 PRINT 'THE RESULT IS', A

Text can be contained by either single or double quotes, this allows the other type of quote to be printed.

10 PRINT 'ABC'CBA', '123'321" will print ABC"CBA123'321

Numerical values are printed with leading spaces (Right Justified) in a field of width 8 characters. The field width can be altered using a # sign followed by the new width (i.e. # 3 gives a width of 3).

The field width will then remain effective until another # or the end of the current PRINT statement.

10 PRINT A, #3, B, #1, C will print A in a width of 8 characters. B in a width of 3 and C in a width of 1.

#1 will result in C being printed Left Justified and any following printout will be shifted to the right if C

is greater than 9

The field width can also be an expression
PRINT # I, A will print A in a field width equal to the contents of variable I

The maximum field width is 63.

Note that negative numbers require an extra character in the field width for the minus sign.

Extra spaces can be generated by repeated commas.

PRINT # 3,A,,,B will print a 3 character A, 2 spaces and a 3 character B

Several PRINT statements can be made to print on the same line by ending the statement with a comma.

Graphic characters can be printed using the PRINT statement. The description of the graphics font lists those Graphics which can be contained in quotes and will result in graphics being printed.

The PRINT statement can also be used to issue cursor control characters

10 PRINT #H will issue a control H which will backspace the cursor

10 PRINT #I will issue a control I which will forward space the cursor

10 PRINT #J moves cursor down

10 PRINT #K moves cursor up

10 PRINT #L will clear the whole screen and reset the cursor. Note that this command must be followed by a delay before the next command (FOR I=1 TO 250; NEXT I)

10 PRINT #M will reset the cursor to the start of the line.


Input

The input command is used to read an expression

ANNOUNCING THE MICROS

JOIN THE MICRO REVOLUTION!

£550 for a Z80 based microcomputer, built and tested

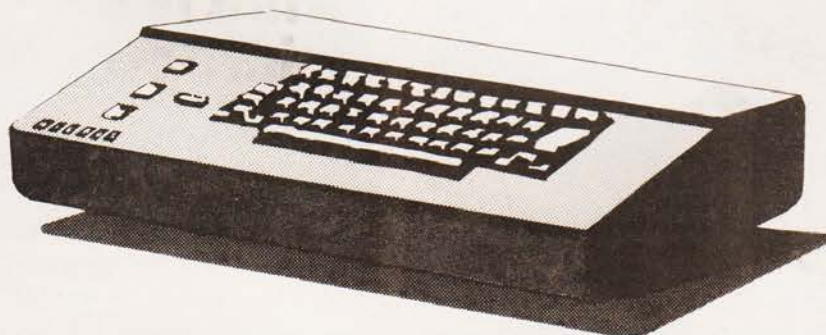

* Includes CPU, ROM, RAM, TV and Audio cassette interface, UHF modulator, ASCII keyboard, power supplies and cabinet.

* Connect to domestic TV or video monitor to complete the system.

* 48 x 16 character video matrix

* Hard copy on teletype

* Also available in kit form £470, or 5 kitpacks at £95 each

* Designed for educational establishments, personal computing and small business users

* Load and dump programmes on unmodified cassette recorder

* 57 key contactless ASCII keyboard

* British designed and built

* Credit terms available

THE MICRONICS COMPANY

1, STATION ROAD TWICKENHAM MIDDLESEX

PART OF THE MICRO REVOLUTION

Prices exclusive of VAT and carriage

BASIC

from the Keyboard. Normally the keyboard input is just an integer value between -32767 and 32767.

10 INPUT A When this statement is executed, the BASIC will first print A followed by a space and then wait for keyboard input. The input is terminated by carriage return. The input is then stored in variable A

10 INPUT A,B will print A,space,then wait for input, it will then print B, space, and wait for input again.

Instead of just allowing the machine to prompt you with the variable, it is much better to ask a specific question. This is done by enclosing the text of the question in quotes.

10 INPUT 'HOW MANY EGGS HAVE YOU LEFT?'

I

The machine will print HOW MANY EGGS HAVE YOU LEFT? and then wait of a number to be typed in.

If during RUN time, the typed input is not a valid expression, the prompt will be repeated and then the machine will wait again.

It is also possible to reprint only part of the prompt.

10 INPUT 'WHAT IS ', 'A + B?'C, 'A - B?'D

The first time the printout will be WHAT IS A + B? and after an invalid input it will just print A + B?

The BASIC interpreter uses its expression evaluation routine to decode the input and therefore the programmer or user can enter an expression using variables already set up.

10 LET A = 3, B = 2

20 INPUT C

30 PRINT C

Instead of entering a value for C, the user can enter

an expression such as A + B, the expression will then be evaluated by the interpreter and the result 5 stored in the variable C. The machine will then print 5.

It is also possible to enter single characters as a reply by making use of the expression input.

10 LET Y = 0, N = 1

20 INPUT 'DO YOU WANT TO CONTINUE? Y OR N' A

30 IF A = 1 STOP

If the user replies Y, A will be set to the contents of Y i.e. zero. If the user replies N-A will be set to 1 and the programme will STOP.

If

The IF command is used to compare expressions, using the compare operators. If the result of this comparison is true (non zero) the rest of the statement is executed. If the result of the comparison is false (zero), the rest of the statement is skipped and execution resumes on the next statement.

10 IF A = 0 PRINT 'A IS ZERO'

The machine will print A IS ZERO only when A is zero.

Note that unlike other BASIC interpreters and compilers, the word THEN is not used.

Either side of the compare can be an expression.

10 IF A = B * 2 PRINT 'A IS TWICE B'


20 IF A * 3 = B * 2 PRINT 'A = B * 2 / 3'

A compare operator need not be used in the IF statement but this practice should be avoided where possible as it can make the programme very hard to follow.

10 IF A = 1 PRINT 'A IS NOT ONE'

»»

A more interesting way to learn

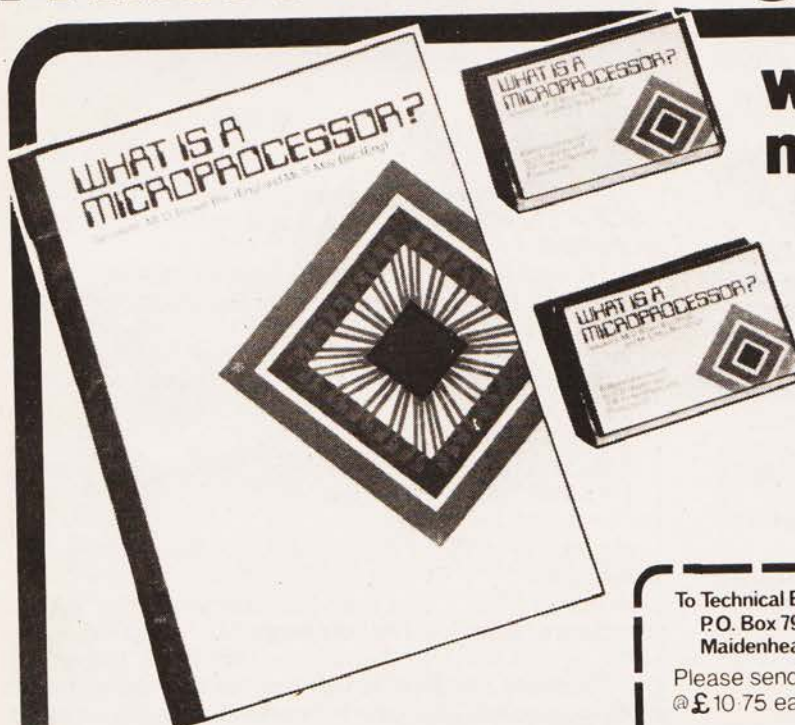

what is a microprocessor?

If you are considering buying a Micro-computer, Development System, or just want to learn more about this exciting technology, then this short introduction to Microprocessors is for you. Comprising of a 72-page book keyed to over two hours of cassette tapes the many aspects of Microprocessors are explained, including Binary and Hexadecimal counting, Internal structure, Operation, Programming Techniques, Devising a program, etc. Learn at your own pace with this valuable addition to your reference library.

To Technical Book Services
P.O. Box 79
Maidenhead, Berks SL6 2EG

ORDER FORM

Please send me copy/copies of What is a microprocessor?
@ £10.75 each inclusive. I enclose remittance £.....

Name
(Print Please)

Address

Registered office 21, Mincing Lane, London EC1 Registered No 12225

the PRINT command is only skipped when the result of the expression in the IF command is zero.

Several commands can follow the IF command
10 IF A=0 PRINT 'A IS ZERO'; GOTO 50

When A is zero, the machine will print A IS ZERO and then jump statement 50.

GOTO

You will probably be fairly familiar with the GOTO command already as it has appeared in several of the examples for the other commands.

The GOTO command is used to break the sequential processing of the BASIC interpreter and cause the interpreter to jump either forward or backwards to the specified statement number.

50 GOTO 10

When the interpreter executes this statement it will jump back up the program to statement 10 and continue its processing from statement 10.

Again, the statement number following the GOTO can be an expression.

20 GOTO A*2

Will jump to the statement number calculated from the expression A*2. If the expression gives a non-existent statement number the BASIC will give an error report.

Using a simple expression for a GOTO is useful where different routines may be required as a result of an input.

Another method of using a computed GOTO is to use the array variable and index it.

10 LET @ (1)=100, @ (2)=200, @ (3)=100,
@ (4)=25

20 INPUT I

30 GOTO @ (I)

If the input for I is 1 the interpreter will jump to statement 100

for I=2 it will jump to 200

for I=3 to 100 again

for I=4 to 25

It is advisable when using the computed GOTO to check the variable for valid values, ie in the above example it would be advisable to insert

25 IF I < 1 GOTO 20

27 IF I > 4 GOTO 20

This will only allow an input of 1 to 4, any other input will result in a repeat request for input.

Gosub and return

The GOSUB command although similar to the GOTO command, is used to exit from a statement and jump to a routine starting at the specified statement number. Execution continues from the specified statement number until a RETURN command where upon the BASIC returns to the command following the original GOSUB.

10 PRINT 'LETS EXECUTE ROUTINE 100'

20 GOSUB 100; PRINT 'WE HAVE NOW
RETURNED'

30 STOP

100 PRINT 'THIS IS ROUTINE 100'

120 PRINT 'I WILL RETURN WHEN I HAVE
FINISHED'

130 RETURN

This will result in the following printout

LETS EXECUTE ROUTINE 100

THIS IS ROUTINE 100

I WILL RETURN WHEN I HAVE FINISHED

WE HAVE NOW RETURNED

The GOSUB 100 command causes the BASIC to jump to statement 100 but also to remember where it is in statement 20. It now executes from statement 100 until it reaches the RETURN command. It then

returns to statement 20 and continues processing it.

For and next commands

The FOR command is a very powerful command. It is used to make the BASIC interpreter loop 'FOR' a specified number of times, the end of the loop being defined by the NEXT command.

10 FOR I=2 TO 10 STEP 2

20 PRINT I

30 NEXT I

I is set to 2 when the FOR statement is first encountered. It will then remain at 2 until the NEXT command is encountered. On reaching the NEXT command 2 is added to I and the BASIC returns to the command following the FOR command. This is repeated until I becomes greater than 10 where upon execution continues with the command following the NEXT command.

Hence, the machine will print

2

4

6

8

10

On exit from the loop I remains at its next value ie 12. If statement 10 had been

10 FOR I=2 TO 11 STEP 2

I will be left at its first value greater than 11 ie 12.

Negative indexing is allowed as long as the first value is greater than or equal to the second and the step is negative.

10 FOR I=10 TO 1 STEP -1

50 NEXT I

I will start at 10 and step down to 1 in increments of 1.

If STEP is omitted, a step of 1 is assumed.

10 FOR I=1 TO 100

I will start at 1 and step up to 100 in increments of 1.

Once more, expressions can be used in all three positions instead of numbers. The expressions are evaluated when the FOR command is executed and any following changes to the variables used will not effect the loop.

10 LET I=10

20 FOR I=I TO I+5

50 NEXT I

The initial value of I is evaluated as 10, the final value is 15. Within the loop, I will index from 10 to 15 in steps of 1

FOR and NEXT commands can be 'nested' within each other, the limit being that of the size of the stack.

10 FOR I=1 TO 10

20 FOR J=1 TO 5

30 PRINT I*J

40 NEXT J

50 NEXT I

This will result in the machine printing I*J when I=1 and J=1 2 3 4 5 then

for I=2 and J=1 to 5

etc. etc.

until I=10

When a NEXT command is executed, the BASIC interpreter checks that the variable specified is the same as that used by the most recent FOR. If they are not the same, the FOR is terminated and the previous FOR examined. This continues until a match is found.

10 FOR I=1 TO 10

20 FOR J=1 TO 10

30 IF J=5 GOTO 50

40 NEXZ J

50 NEXT I

Each time J gets to 5, the BASIC jumps to statement

50. This cancels the J FOR loop leaving J at 5 and continues with the I for loop.

If within a FOR loop, another FOR loop using the same variable is encountered, the first FOR loop is terminated.

Stop

The stop commands stops the execution of the programme when it is executed. Any number of STOP commands can be included within a programme.

```
10 GOSUB 100
20 GOSUB 200
30 GOSUB 300
40 STOP
```

VDU

The VDU command allows the programmer direct access to the VDU control chip and its memory hence allowing a wide range of graphics applications.

The VDU command has two parameters, the first being the VDU memory address, the second being the desired graphic symbol specified as a decimal number.

10 VDU 5, 126

This will result in the graphic —> being placed in the fifth byte of the VDU memory.

The VDU memory is arranged as 16 rows each containing 64 bytes therefore addresses 1 to 64 are on the first row, 65 to 128 on the second etc.

Due to the function of the VDU control chip, care should be taken when using the first row and the first column as certain graphics characters will produce strange effects.

To allow the programmer to use all the VDU control commands, address zero has been allocated.

10 VDU 0, 12

This does not use memory location zero, instead the value 12 is output to the VDU controller.

12 is the command to clear the screen and reset the cursor.

Note that commands 12 and 28 require an extra delay while the command is executed. A FOR loop should be used (FOR I=1 TO 150; NEXT I before the next PRINT, VDU or INPUT command.

Other useful VDU commands are as follows:

- 8 Backspace cursor one character
- 9 Forward space cursor one character
- 10 Line Feed (Move cursor down on line)
- 11 Move cursor up one line
- 12 Reset cursor to top and clear screen
- 13 Carriage Return — Reset cursor to start of line clearing rest of line
- 27 Line Feed
- 28 Reset cursor to top without screen clear
- 29 Reset cursor to start of line without rest of line clear.

When using the memory mapping option, care must be taken to make sure that the memory address is between 1 and 1024 inclusive. If you exceed 1024 it is possible to overwrite the stack and your programme.

It is possible to make your BASIC programme modify itself using VDU but this is fairly difficult and

not really worth the trouble it can cause.

Before using memory mapping it is advisable to use either command 12 or 28 to reset the cursor. If the screen has been scrolling, row 1 will not be at the top of the scan unless this is done.

The graphic symbol specified in the second parameter is a decimal number between 0 and 255 inclusive. If a larger number is specified, only the least significant byte is used.

The graphics and character code are given elsewhere in ETI but some of the more useful are listed below.

0 to 31	see Graphic Font
32 Space	
33 — 47	! " # \$ % & ' () * + , - . /
48 — 57	0 to 9
58 — 64	:: < = > ? @
65 — 90	A to Z
91 — 95	[]
96 — 127	see Graphics Font
128 — 225	Is a repeat of 0 to 127 (The high order bit is ignored)

To print a variable between 0 and 9 using VDU just add 48.

VDU 0, I + 48

This will print the value of I if it lies between 0 and 9.

To produce moving graphics, it is necessary to use FOR loops to index the memory mapping.

Direct commands

The following are direct commands to the BASIC Interpreter. They are obeyed as soon as they are entered.

RUN will start the execution of the programme at the lowest statement number.

LIST will print out all statement in ascending numerical order.

LIST 100 will print out all the statements starting at statement 100.

LIST 50, 10 will print 10 lines starting at statement 10.

NEW will delete all programme statements ready for a new programme.

Control C will return you (at any time) to the Monitor.

Any BASIC command can be entered as a Direct Command by leaving off the statement number. The statement is then executed immediately and not stored as part of the programme.

This feature is very useful when your programme stops due to an error report. (see Error Reports)

Abbreviations

All the commands can be abbreviated as follows.

It is advisable only to abbreviate when you are tight on memory as the abbreviated programme can be extremely difficult to follow.

Functions

A. = ABS
R. = RND
S. = SIZE

Commands

Implied = LET ie A = B + C, D = E + F etc

BASIC

REM.	= REMARK
P.	= PRINT
IN.	= INPUT
I.	= IF
G.	= GOTO
GOS.	= GOSUB
R.	= RETURN
F.	= FOR
TO.	= TO
S.	= STEP
N.	= NEXT
S.	= STOP
V.	= VDU
Direct Commands	
L.	= LIST
R.	= RUN
N.	= NEW

Error Reports

It is quite probable that you can have already seen some of the error reports generated by the BASIC Interpreter.

Although there are only three different error messages (WHAT? HOW? and SORRY) the BASIC will insert a question mark at the point where the error occurred.

WHAT? This means the interpreter has come across a command or expression that it can't interpret.

WHAT?

300 I? PUT A — INPUT is spelt wrongly.

WHAT?

40 A = 300/(B+C? — The close parenthesis is missing

HOW? This means the interpreter can not execute the command.

HOW?

60 A = 300*500? — The result is greater than 32767

10 A=5,B=0

20 C=A/B?

HOW? — You can't divide by zero

40 GOTO 37?

HOW? — Statement 37 is missing

SORRY This means that there is not enough memory. This can occur during typing in a programme or during the execution when the array is used — @(). It is worth checking the variable or expression if the array is involved to make sure that it is a sensible value.

210 A = @(I*J+K)

SORRY

If this occurred during typing in of the programme then there is not enough memory.

If this occurred during execution (RUN) then either there is not enough memory for @ or the expression I*J+K may be incorrect.

To check this type

PRINT I,J,K,I*J+K

and the values of I J K and I*J+K will be printed. You can now check if the result is correct.

This shows how useful the direct command option is. If the result of the PRINT is OK then another check is

PRINT SIZE

This will give how much memory space (in bytes) is left.

CTI



nm
£197.50
+ VAT 8%
POST PAID

NASCOM I MICRO-COMPUTER for the HOBBYIST

As reviewed in this issue

THE ONLY **COMPLETE** MICRO-COMPUTER AVAILABLE TO THE HOME CONSTRUCTOR

FEATURES

- ★ Supplied in kit form for self-assembly
- ★ Full documentation supplied
- ★ Fully screened double-sided plated through hole printed circuit board
- ★ Full 48 key keyboard included
- ★ 2K x 8 Ram
- ★ 1K x 8 monitor program in Eprom
- ★ Powerful Mostek Z80 CPU
- ★ 16 x 48 character display interface to std un-modified T.V.
- ★ T.V. display memory mapped for high speed access
- ★ On board expansion to 2K x 8 Eprom
- ★ On board expansion for additional 16 I/O lines
- ★ Memory may be expanded to full 60K (plus 4K existing on board)

SOFTWARE FEATURES

- ★ 1K x 8 monitor program providing
- ★ 8 operating commands, supporting Mem examine/modify, tabulate, copy, break, single step execute tape, load, tape dump
- ★ Reflective monitor addressing for flexible monitor expansion through user programs
- ★ Monitor sub-routines include: — delay ASCII coding, binary to hex conversion, clr screen, scroll up, string print, cursor shift and many others

EXPANSION

- ★ Expansion buffer board **£25.00**
- ★ Memory board, with decoders and all hardware except memory ICS **£35.00**
- ★ 4K dynamic memory ICS **£36.00**
- ★ 8K dynamic memory ICS **£60.00**
- ★ 16K dynamic memory ICS **£144.00**
- ★ 32K dynamic memory ICS **£250.00**
- ★ I/O board with decoders and all hardware except ICS **£35.00**
will accept up to 3 PIOs, 1 CTC and 1 UART

NEW "B-BUG" extended monitor in 2K of EPROM. Fully software compatible with NASBUG, supporting additional features — Full keyboard shift for all 128 characters, full cursor movement routines, Read and Write commands (fast tape load and dump), H and N commands (for inserting ASCII code directly into programme), Arith. command (for calculating relative jumps), Generate command (for automatic programme start), Intelligent copy (for non-destructive re-location of DATA), Random, block handling, ASCII to BCD and BCD to ASCII routines and many more. 2 EPROMS + full documentation — **£24.50.**

- ★ S.a.e. for full expansion details.

OTHER HARDWARE

- ★ 2.2A power supply for up to 4K expansion **£19.90**
- ★ 8A power supply for larger than 4K expansion **£45.00**
- ★ Expansion card frame **£29.50**
- ★ Programming manual **£3.50**
- ★ Hardware & software manuals (supplied in kit) **£2.95**

Trade, Government and Educational Enquiries Invited

Add VAT at 8% on all items except manuals

Demonstrations Continuous at our Store

Construction
Manuals
Separately
£2.95

**Complete Kits
NOW IN STOCK**

£197.50
+VAT 8%
POST PAID

**Sole Appointed
London
Stockists**

After sales service available

**HENRY'S
RADIO**

All mail to: Henry's Radio 404 Edgware Rd, London W2

LONDON W2 404 6 Edgware Road Tel. 01 723 1008

microfile

Gary Evans has found himself a new home this month and reports on a way to save money and the latest in train controllers amongst other things.

OVER THE PAST FEW months the advertising pages of ETI have seen the inclusion of a number of American firms offering a wide range of components aimed in the main at the DIY computer hobbyist. The prices of many of the goods available, when converted into pounds, make very attractive reading. The snag — and there must be one — is just how do we go about getting the things over from the States.

The procedure is not as harrowing as one might suspect. The first thing to do is to identify exactly what it is you want to buy and the exact cost in dollars of the goods plus packing. Go along to your bank with the advert and tell them exactly what you want to buy and the cost in dollars. They will prepare a dollar draft, a document which, in conjunction with a sister bank in the States, will be as good as cash to the firm supplying the components. Note that your bank account will be debited at this stage.

Now it's just a matter of sending off the draft plus your order — the things should arrive in the post within the next few days.

If the firm in the States 'does a bunk' with your hard-earned greenbacks, however, getting anything back will prove very difficult if not impossible. We would let you know of any companies that we know are not honouring their orders but it would be best to place a small order to try out a firm's credibility before parting with a large amount of money.

I might mention that an advert in last month's ETI, not even I've seen this month's ad pages, from an American firm, is advertising a TR5-80 16K conversion kit with information about which jumpers to change for a good bit under £100. When you compare this to the £200 plus Tandy want in addition to the fact that with the DIY way you keep your original 4K, you can see that shopping in the States can be very profitable.

Club Together

I've had a few, not a lot, but a few replies to my 'Club Call' a couple of months ago.

In the Midlands, a group of the ACC has been having successful bi-monthly meetings for about a year — contact John Diamond at 27 Loweswater Road, Binley, Coventry. Also in the Midlands is the West Midlands Computer Club which has just held its first meeting in Brierly Hill. Contact Tony Bridgewood on 021-557 6709.

Now a plea for those interested in starting a branch of the ACC in Bristol, those interested contact Rex Godby at 16 Williamson Road, Ashley Down, Bristol.

Finally the Cambridge University Processor Group (they've got very nice notepaper) which despite the name is open to everyone and holds regular meetings during term time (that's about four months out of twelve from what I hear). Tim Hopkins is the man to contact at Magdalene College, Cambridge.

In all the above cases please enclose an SAE with any letter.

News of another firm generating games — initially for

— you guessed it PET — the firm plan to expand into Z80 machine code programs — NASCOM, MICROS, RM 380Z with possibly games for KIM-1.

Mini micro are at 47 Queens Road, London, N11 2QP. Their catalogue is available — again send an SAE.

Shocking Story

It was my pleasure to build up one of the Triton prototypes. Enough has been said about the machine elsewhere in this issue, I'll just add my congratulations to the designer Mike Hughes for producing a really excellent project.

Before leaving the subject you might be interested to hear of an experiment I performed with the machine. It was designed to test the Triton under extreme conditions, namely applying high voltage AC the selected components via a high resistance. Needless to say I was the high resistance and the fact that I'm telling the tale show I'm OK, the Triton hardly twitched which could not be said for me.


House Trained

Details are scarce, but the model train exhibition at the end of August saw the preview of an MPU controlled train system.

Designed by Hornby, who have designated it the Zero-1, the controller will enable up to 16 trains to be controlled on a layout, each being called up by a key pad. The trains will have programmable levels of inertia.


This is not a 'section' system, control being, presumably, by a pulse code system. The conversion of the train is simple, a small circuit block being inserted in the motor's power lines.

Due for launch late next year the Zero-1 should make Christmas '79 something to remember, as at a price of about £30/£40 it must be a must, to coin a phrase.

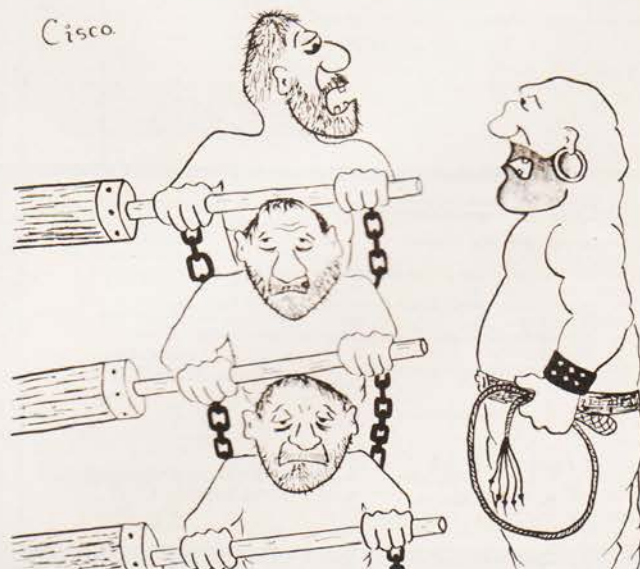

"Any truth in the rumour we're about to be replaced by an MPU boss."

COMPUTING TODAY — NOVEMBER 1978

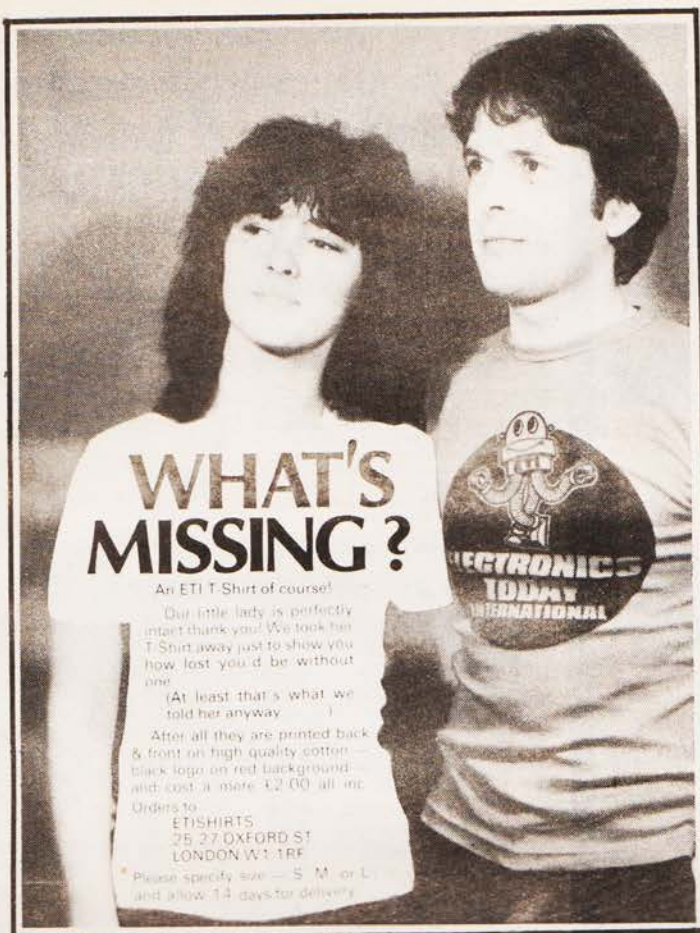

WHAT'S MISSING?

An ETI T-Shirt of course!

Our little lady is perfectly intent thank you! We took her T-Shirt away just to show you how lost you'd be without one.

(At least that's what we told her anyway.)

After all they are printed back & front on high quality cotton — black logo on red background — and cost a mere £2.00 all inc. Orders to:

ETISHIRTS,
25-27 OXFORD ST
LONDON W1 1RF

* Please specify size — S, M or L — and allow 14 days for delivery.

MICRO-COMPUTER BARGAINS

We have a stock of untested micro-computer PCB's which are surplus to our requirement. Each board contains an Intel 4040 (CPU), 4201 (Clock), 4289 (Standard Memory Interface), 5MHz crystal, zero crossover detector cct, power on reset cct, skts for 6 x 1702A PROM and on board power supply containing transformer, rectifier, regulator, heatsink and reservoir capacitor.

These PCB's are sold with data on all chips and cct diagram, as untested units at the bargain price of

£19.00 ea

Also available:

1702A memory, used but erased
£6.00

1702A memory programmed to your requirement **£7.50**

6265 gen purpose i/p-o/p device
£5.00

Cheque/Postal Order to:

VERDURE LTD.

54/64 Morfa Road
Strand, Swansea

Mail Order Supplies Only

Tel: (0729) 41241/462684

COMPUTING AD INDEX

Advanced Computer Products	p29
Airamco	p3
Almarc	p8
Comp Computer Components	p32
Electronic Brokers	p8
Henrys	p28
Lotus Sound	p31
L.P. Enterprises	p20
Microdigital	p19
Micronics	p24
NASCO	p2
New Bear	p19
Science of Cambridge	p12, 13
Strathand	p4
Tangerine	p4
Technical Book Service	p25
Transam	p14
Verdure	p31
Viewfax	p4

MEMORIES

2112 (256 x 4 Static RAM)	£1.11
21L02 (450ns) (1K x 1 Static RAM)	£1.07
21L02 (250ns)	£1.60
2114 (1Kx4 Statis RAM)	£7.70
4027(300ns, equiv 2104)	£2.02
(4K x 1, 16 pin, Dynamic RAM)	
5208 (equiv. 2107)	£3.21
(4K x 1, 22 pin, Dynamic RAM)	
4116	£18.00
(16K x 1, Dynamic RAM)	
2708	£7.87
(1K x 8 UVEPROM)	
8080A (CPU)	£7.45
81LS95 (Buffer TriS)	75p
81LS96 (Buffer TriS)	75p

All VAT inclusive
35p for p&p orders under £5

Please write for discounts
over 100 pieces

ALL FULL SPEC AND UNUSED

(Mail Order only)

PET CORNER

Lotus now carry an exciting range of products for your CBM PET

24K Memory Expansion

- ★ Mounts inside PET
- ★ Runs from PET's own power supply
- ★ Takes 10 minutes to fit
- ★ Includes memory test program
- ★ 6 month warranty

£399 inc. VAT & P&P

MUSIC BOX

Turns your PET into a programmable musical instrument. You can record and play up to 90 pages, 16 notes per page, change tempo, key etc.

£37.50 inc. VAT & P&P

T.I.S. WORKBOOKS

A set of 5 workbooks to give you a full understanding of all the ins and outs of your PET more fully than any previous manuals.

£15.95 per set inc. P&P

Dustcover £17.95 inc. VAT & P&P

Lots of software and other goodies. Send large SAE.

**LOTUS
SOUND**

4 MORGAN STREET
LONDON E3 5AB

INTERESTED IN HOME COMPUTING?

Start now and don't get left behind
THE NASCOM 1 is here
Ex-stock with full technical services

Plus the opportunity to join the fastest moving club of personal computer users enabling you to get the most out of your computer. You can OBTAIN and EXCHANGE programs and other software — many now available.

The Powerful Z80
Microprocessor
Professional Keyboard
1 Kbyte Monitor in EPROM
2 Kbyte RAM (expandable)
Audio Cassette interface
Plugs into your domestic TV

Easy construction from
straightforward instructions
— no drilling or special tools
— Just neat soldering
required.



Only **£197.50** + 8% VAT (includes p & p + insurance)

Manuals separately	3.50	Monitor quality improved	
Z80 programming Manual	6.90	TV Modulator	2.50
Z80 Technical Manual	3.40	Super Modulator (10MHz)	5.50
PIO Technical Manual	3.40	Power supply suitable for NASCOM	19.90

(All prices add 8% VAT)

Available from COMP now. *4K and 16K RAM expansion boards for NASCOM 1 with sockets on board for MINIBASIC EPROMS. Trade, government and educational enquiries invited. Can be supplied ready built tested and guaranteed.

nm
Nascom Microcomputers

**BLANK C12
Racal Quality
CASSETTES
£4.90 for 10**

Introducing the personal computer you've waited for. **THE EXIDY SORCERER.**

SORCERER COMPUTER SYSTEM

The Sorcerer Computer is a completely assembled and tested computer system. Standard configuration includes 63-key typewriter-style keyboard and 16-key numeric pad, Z80 processor, dual cassette I/O with remote computer control at 300 and 1200 baud data rates, RS232 serial I/O for communications, parallel port for direct Centronics printer attachment, 4K ROM operating system, 8K ROM Microsoft BASIC in Rom Pac™ cartridge, composite video of 64 char/line 30 line/screen, 128 upper/lower case ASCII set and 128 user-defined graphic symbols, operation manual, BASIC programming manual and cassette/video cables, connection for S-100 bus expansion.

only **£950** Credit facilities available.
+ 8% VAT

AS SEEN ON OUR STAND
AT PCW SHOW



LOOK!

*32K RAM (16K available)
*RS232 interface * 8K BASIC ROM
*CUTS interface * 4K MONITOR
*KANSAS CITY interface * \$100 BUS
* User defined graphic symbols. * Z80 cpu

VIDEO GAMES & Components

UHF Vision modulator Standard channel 36	2.90
UHF Vision modulator 10 MHz bandwidth high quality	5.90
VHF Vision modulator channel 3	3.10
Sound modulator compatible with above	2.90

AY-3-8500 6 Games	4.90	PCB 1.90	* ETI Tank Battle kit — just add controls — £14.90 reduced from £19.90 .
AY-3-8550 6 Games	3.90	PCB 1.90	
AY-3-8610 10 Games	5.90	PCB 1.90	
AY-3-8760 Motor-bike	6.90	PCB 1.90	
AY-3-8710 Tank-battle	6.90	PCB 1.90	
AY-3-8603 Road Race	5.90	PCB 1.90	

JOYSTICKS — £1.90 each Dual 200K lin

KEY BOARD

Brand new professional
ASCII keyboards (USA)
Full technical details
included.

Only **£49.90**
+ 8% VAT.


Ready built, tested
and guaranteed.



NEW — AVAILABLE NOW

Shugart floppy drives **£290 each**

Floppy drive controller
direct from USA **£190 each**



ETI 8080 ONE BOARD COMPUTER

ETI 8080
COMPONENTS IN STOCK

SEND SAE FOR
PRICE LIST OF
PARTS AND KIT.

COMPUTER COMPONENTS

A selection of our Computer components

CPU AND SUPPORT DEVICES

Z80	cpu	14.90
Z80A	cpu	20.50
Z80	PIO	9.90
Z80	CTC	9.90
8080A	cpu	7.95
8212	8 Bit I/O Port	3.50
8214	Priority Interrupt Control	9.00
8216	Bi-Directional Bus Driver	3.75
8224	Clock Generator & Driver (2MHz)	3.50
8224.4	Clock Generator & Driver (4MHz)	9.95
8226	Inverting Bi-Directional Bus Driver	3.95
8228	System Controller & Bus Driver	7.95
8238	System Controller & Bus Driver	7.50
8251	Programmable Communication Int.	9.95
8253	Programmable Interval Timer	18.95
8255	Programmable Peripheral Int.	12.00
8257	Prog. Direct Mem. Access Cont.	17.95
8259	Programmable Interrupt Cont.	17.95
6800	cpu	11.90
6810P	128 x 8 Static Ram (450ns)	4.95
68B10P	128 x 8 Static Ram (250ns)	6.00
6820P	Peripheral Interface Adaptor	7.50
6821P	Peripheral Interface Adaptor	7.50
6828P	Priority Interrupt Controller	11.25
6834P	512 x 8 Bit Erasable Prom. 500	16.95
6850P	Asynchronous Comm. Adaptor	9.75
6825P	Synchronous Serial Data Adaptor	11.75
6860P	0-600 RPS Modem	10.00
6862P	2400 RPS Modulator	14.50
6871P	Clock	28.00
6875P	Clock	8.75
6880P	MPU Bidir. Bus Ext.	2.50

MEMORIES

2102	1K	1.20
21L02	1K	1.40
2101	1K	2.95
2111	1K	3.95
2112	1K	2.95
2114	4K	9.95
4116	16K	19.90
1702A	256B	5.00
2708	1K	10.90
2708	(NASBUG)	13.90
2716	(5V, INTEL)	29.00

OTHER

USEFUL DEVICES

6576	char gen	10.90
6402	UART	9.90
1771	Floppy disk controller	49.00

Full selection of US and
British Magazines and books
for the Computer
Hobbyist.

Prices always changing
(usually downwards)
Phone with your
requirements

All prices include VAT except where shown. Orders over £5 post and packing free otherwise add 20p.



Please make cheques and postal orders payable to COMP, or phone your order quoting
BARCLAYCARD or ACCESS number. For technical information and advice ring
JIM WOOD, BSc(Eng), ACGI, MIEEE — Consultant to COMP.



COMP COMPUTER
COMPONENTS

14 STATION ROAD · NEW BARNET · HERTFORDSHIRE · TEL: 01-441 2922
CLOSE TO NEW BARNET BR STATION — MOORGATE LINE 01-449 6596
OPEN — 10am to 7pm — Monday to Saturday