

computing today

ISSN 0142-7210

JUN 1979

50p



COMPUTER GAMES SURVEY
THE LIGHTER SIDE OF THE HOBBY!
COMPUCOLOUR REVIEW
BUS ROUTE FOR S100
TRITON HUMBUG

8K ON BOARD MEMORY!

5K RAM, 3K ROM or 4K RAM, 4K ROM (link selectable). Kit supplied with 3K RAM, 3K ROM. System expandable for up to 32K memory.

2 KEYBOARDS!

56 Key alphanumeric keyboard for entering high level language plus 16 key Hex pad for easy entry of machine code.

GRAPHICS!

64 character graphics option — includes transistor symbols! Only £18.20 extra!

MEMORY MAPPED

high resolution VDU circuitry using discrete TTL for extra flexibility. Has its own 2K memory to give 32 lines for 64 characters.

KANSAS CITY

low error rate tape interface.

2 MICROPROCESSORS

Z80 the powerful CPU with 158 instructions, including all 78 of the 8080, controls the MM57109 number cruncher. Functions include +, -, *, /, squares, roots, logs, exponentials, trig functions, inverses etc. Range 10^{-99} to 9×10^{99} to 8 figures plus 2 exponent digits.

EFFICIENT OPERATION

Why waste valuable memory on sub routines for numeric processing? The number cruncher handles everything internally!

RESIDENT BASIC

with extended mathematical capability. Only 2K memory used but more powerful than most 8K Basics!

1K MONITOR

resident in EPROM.

SINGLE BOARD DESIGN

Even keyboards and power supply circuitry on the superb quality double sided plated through-hole PCB.

COMPLETE KIT



Cabinet size 19.0" x 15.7" x 3.3". Television by courtesy of Rumblelows Ltd., price £58.62

**ONLY
£275.00
+VAT**


POWERTRAN

**PSI Comp 80.Z80 Based powerful scientific computer
Design being published in Wireless World — NOW!**

The kit for this outstandingly practical design by John Adams being published in a series of articles in Wireless World really is complete!

Included in the PSI COMP 80 scientific computer kit is a professionally finished cabinet, fibre-glass double sided, plated-through-hole printed circuit board, 2 keyboards PCB mounted for ease of construction, IC sockets, high reliability metal oxide resistors, power supply using custom designed toroidal transformer, 2K Basic and 1K monitor in EPROMS and, of course, wire, nuts, bolts, etc.

SYSTEM EXPANSION COMING SHORTLY!

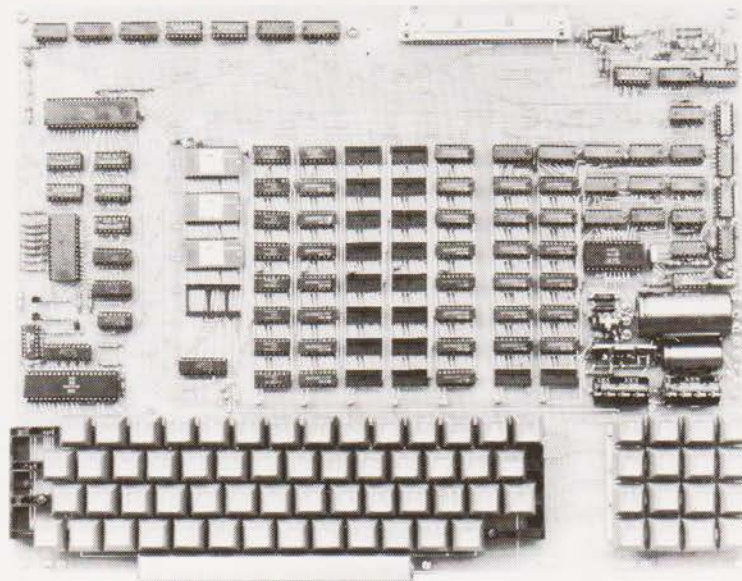

Kit also available as separate packs: e.g. PCB, Keyboards, Cabinet, etc.

PCB size 16.0" x 12.5"

Value Added Tax not included in prices

PRICE STABILITY: Order with confidence. Irrespective of any price changes we will honour all prices in this advertisement until July 31, 1979, if this month's advertisement is mentioned with your order. Errors and VAT rate changes excluded.

EXPORT ORDERS: No VAT. Postage charged at actual cost plus 50p handling and documentation.

U.K. ORDERS: Subsequent to 8% surcharge for VAT*. NO charge is made for carriage*. Or current rate if charged.

SECURICOR DELIVERY: For this optional service (U.K. mainland only) add £2.50 (VAT inclusive) per kit.

UK Carriage FREE

POWERTRAN COMPUTERS

(a division of POWERTRAN ELECTRONICS)

PORTWAY INDUSTRIAL ESTATE
ANDOVER HANTS SP10 3MN

ANDOVER
(0264) 64455

computing today

VOL 1.NO 4.
JUNE '79

ACTING EDITOR: Ron Harris B.Sc
EDITORIAL ASSISTANT: Henry Budgett.
ART DIRECTOR: Diego Rincon.
PRODUCTION: Pete Howells, Paul Edwards,
Tony Strakas, Bren Goodwin.
READER SERVICES: Alan Cariton (Manager).
ADVERTISING: Chris Surgenor (Manager).
EDITORIAL DIRECTOR: Halvor Moorshend



Are you game? We'll play along!

	PAGE
NEWS What comes out we put in	6
COMPUCOLOR REVIEW We take a close look at the rival to the Apple 2.	13
SOFT SPOT A calculator NIM gam and a BASIC minefield game	18 & 35
HUMBUG V5.1 A new, more powerful monitor for TRITON	21
PET PORT II Another RS232 adaptor for your PET	28
PRINTOUT Your views in print	32
GAMES SURVEY We play away	38
BASIC SERIES This month we continue our explanation of NIM	45
S100 BUS Confused? Read and all will be revealed	50
NASCOM PACKAGE This month we present an educational program	54
BITS BYTES & BAUDS A look at the mass storage devices for computers	59
PRANG A hardware random number generator for games	63
MOTOROLA D2 The first part of our programming series	67

Computing Today international is normally published on the third Friday of the month prior to the cover date.
COPYRIGHT: All material is subject to world wide Copyright protection. All reasonable care is taken in the preparation of the magazine to ensure accuracy but CT cannot be held responsible for it legally. Where errors do occur a correction will be published as soon as possible afterwards.

Distributed by Argus Distribution Ltd. Printed by LSG. Limited, Lincoln.

EDITORIAL AND ADVERTISEMENT OFFICE
25-27 Oxford Street, London W1R 1RF. Telephone 01-434-1781/2 Telex 8811896

Pet Expansion



Computhink
Dual drive
minifloppy

Complete with 4K disk operating system in ROM, plugs into Expandapet memory. Adds 15 new commands to Pet's Basic to give full disk extended Basic. Loads 8K in 2.6 seconds. Automatic reorganisation of free space. Utility Disk

£833 + V.A.T.

Expandapet memory

Powered by Pet's own powersupply and mounted internally in 5-10 minutes without special tools.

16K..... **£261** + V.A.T.

24K..... **£320** + V.A.T.

32K..... **£374** + V.A.T.

All units are fully built and tested.

Apple II




Apple II was the original with full colour high resolution microcomputer Basic, and it is still the best. With a very wide range of expansion available, including disk drive, interface cards, voice recognition card, light pen and many others.

Apple II has been well tried and approved by the public (over 200,000 sold) because of its thoroughly professional design and high quality engineering. You cannot get better value for money. Please send us a large s.a.e. for further details.

With 16K user RAM only **£820** + V.A.T.

Super Board II

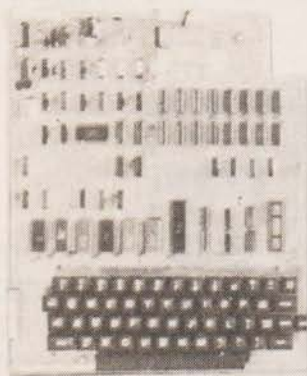

This 6502 based microcomputer comes with a full 8K Microsoft basic in ROM. Full keyboard. 4K static user RAM (on board expandable to 8K). Kansas City standard interface for use with an ordinary cassette recorder. Machine code monitor and I/O utilities in ROM. Direct Video access with 1K dedicated RAM (besides 4K user RAM) and full graphics set.

Fully built and tested only needs a 5V 3amp power supply and T.V. Monitor or R.F. modulator to be up and running.

£263.84 + V.A.T.

Apple II & TRS80 Memory Expansion



Save Over £100

TRS 80 and Apple II memory expansion kits. Fully guaranteed and with full specification 4116 16K RAMs.

Kits come with full instructions and new jumper sets where necessary. Fitting takes 5-10 minutes, or bring along your Apple or TRS 80 and we will fit it for you for £5.

16K upgrade kit **£85** + V.A.T.

LOTUS SOUND

4 MORGAN STREET
LONDON E3 5AB

TELEPHONE: 01-981 3993
TELEX: 261426 ATN. LOTUS SOUND

Britain is a nation of PET lovers

**THE No. 1
Personal
Computer
in the
U.K.**

**Hobbyist
Commercial
Scientist
Education**

**NOW FROM
£450
plus V.A.T.
(4K model)**

for the first time
user and the professional
check out the PET, the world's
most popular personal computer

- * **AVAILABLE** in either 4K, 8K, 16K* or 32K* RAM.
(*with large typewriter style keyboards.)
- * **CAPABLE** - just like a traditional computer.
- * **UNDERSTANDABLE** - fast, comprehensive and powerful - BASIC is one of the easiest computer languages to learn, understand and use. Machine language accessibility for the professionals.
- * **PERSONAL** - easily portable and operated - just "plug in" and go. Unique graphics make fascinating displays.
- * **EXPANDABLE** - built in IEEE-488 output, 8K RAM expandable to 32K, parallel user port 2nd. Cassette interface.
- * **SERVICEABLE** - easily serviced - only 3p.c. boards all readily accessible.

Commodore PRINTERS and DUAL DRIVE FLOPPY DISCS now available.

Contact your local dealer for a demonstration, also for memory expansion and peripheral details, also list of readily available software.

**AUTHORISED COMMODORE
PET DEALERS**

Birmingham

Taylor Wilson Systems Ltd
Knowle (05645) 6192

Bolton

B & B Consultants
0204-26644

Bristol

Sumlock Tabdown Ltd
0272 26685

Cardiff

Sigma Systems Ltd.
0222-215151

Derby

Davidson-Richards (Int) Ltd
0332 366803

Durham

Dyson Instruments
0385 66937

Grimsby

Allen Computers
0472 40568

Guildford

P.P.M.
0483 37337

Hemel Hempstead

Data Efficiency Ltd
0442 57137

Leeds

Holdene Ltd.
0532-459459

Hove

Amplicon Micro Systems
0273-720716

Liverpool

Rockliff Brothers Ltd.
051-521 5830

Liverpool

Dams Office Equipment Ltd
051 227 3301

London N.W.4

Da Vinci Computers Ltd.
01-202 9630

London W.C.2

TLC World Trading Ltd
01-839 3893

London EC1

Sumlock Bondain Ltd
01-253-2447

Manchester

Cytek (UK) Ltd
061 832-7604
Sumlock Electronic Svcs.
061 228 3507

Morley (W. Yorks)

Yorkshire Electronic Svcs.
0532 522181

Northern Ireland

Medical & Scientific
08462 77533

Nottingham

Betos (Systems) Ltd
0602 48108

Reading

C.S.E. (Computers)
0734 61492

Southampton

Symtec Systems Ltd
0703-37731

Business Electronics
0703 738248

Swansea

Radio Supplies (Swansea)
0792-24140

Thame, Oxon

Memec Systems Ltd
084 421 3149

Woking

Petalect Ltd
048-62-69032

Yeovil

Computerbits Ltd
0935 26522

**In case of difficulty call COMMODORE SYSTEMS DIVISION
360 Euston Road, London. Tel. 01-388-5702**

CLUB NEWS

It is proposed to set up a club in Britain for those people using the RCA 1802 microprocessor, Cosmac ELF, ELFII, Super Elf etc. The unofficial assistance of RCA and HL Audio has been promised. Would those interested please contact James Cunningham at 7 Harrowden Court, Harrowden Road, Luton LU2 0SR. Enclose an SAE please.

A computer club has been set up at Southgate Technical College and anyone requiring more information should write to Mr I.E. Williams at the college, High Street, London N14 6BS.

A new computer club has been formed in South Yorkshire. Known as SYPCG it has been created for those who are primarily interested in computing on a do-it-yourself basis. Meetings will be held on the 2nd Wednesday of each month and it is hoped that profiles of equipment and problem solving sessions will be featured. Membership is £3 for 1979 and all people in the area are welcomed to join. The address for further information is: Tony Rycroft, SUPCG Secretary, 88 Spinneyfield, Moorgate, Rotherham, S.Yorks. Meetings will be held at the University of Sheffield.

Another addition to the computer club scene is SPEC, the Sorcerer Program Exchange Club. Formed to promote the Exidy Sorcerer the club will act as a clearing house for program ideas and helpful hints on the use of the machine. The news letter and further information is available from Mr. M.P. Hannaby at 65 Trafalgar Road, Birkdale, Southport PR8 2NJ.






BUSINESS SYSTEMS LAUNCH

Commodore have announced an endorsement scheme for PET compatible products. The first to be included in the scheme is a new range of business software from ACT, Petsoft's parent company, under the name PETACT. Launched as a total system the hardware sells at under £2,500 which is less than half of commercially produced systems. The software prices range from £225 to the complete system at around £800. You can select either disk or cassette based software and there is no problem upgrading from one to the other because the programs are written in BASIC. The hardware consists of the new 32K large keyboard PET, a twin floppy drive and a tractor feed printer. All the Commodore products and the first is currently being delivered and the second two will arrive in your local shop about mid May. The software is the first set of business software to be written for PET by professional company and appears very impressive, the first two packages announced are Purchase and Sales accounting. Chuck Peddle, the father of both KIM

and PET, was present and hinted that there are some very interesting hardware products on the way in the coming year. Sales figures of the PET in the UK are very interesting, during 1978 around 3000 were sold in the country and already this year another 3000 have been ordered, about 70% are going to the professional market. The UK dealer network is running at about 100 at the moment and these have all been selected on the basis of being able to provide both hardware and software support for the customers. On the subject of the new PETs with expanded memory and large keys they look most impressive but the proposed new green display has not yet been implemented, the large keys are well labelled with block letters, possibly too large, and are double injected to avoid the wear problem that happened with the earlier types. The graphics legend is engraved on the leading edge of the key face. Although there is no Commodore memory expansion yet it is hoped to approve some under the endorsement scheme so you will be able to upgrade your system to cater with the floppy disks. A final note on the business system is that the price of software includes a days training for an operator in the use of it.


MOTOROLA ROLLS ON

Motorola have just announced a vast array of new chips and micro support devices. The new chips are the MC6805 8 bit CPU containing clock, 64 bytes RAM, 1100 bytes ROM, memory mapped I/O and timer, the MC6882 eight bit buffer latch and two memory chips. There are the TMS2716 EPROM in 2024 by 8 format with industry standard pin-out and the new 4K by one static RAM. This also has the standard pin-out and operates from a single 5 V supply. The support devices include a new dual drive, double sided floppy for the EXORciser, EXORterm, and Micromodule products. Also included in the release are a new CRT terminal for use with the EXORciser and a development package for use with the 6801 micro. More information on all these new products can be obtained from Motorola at York House, Empire Way, Wembley, Middx.

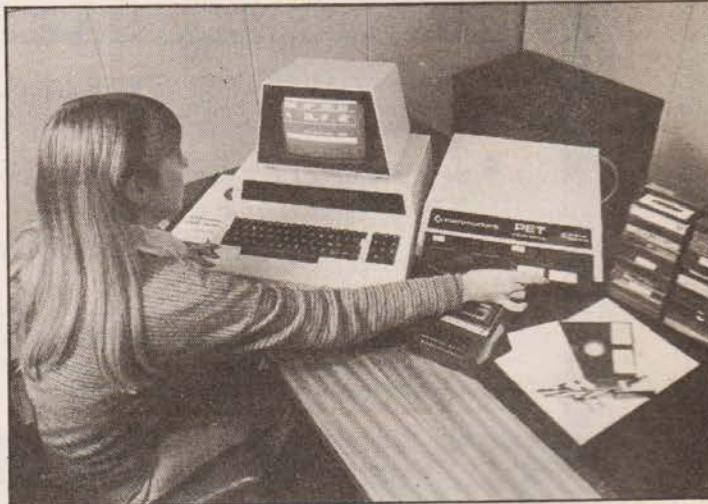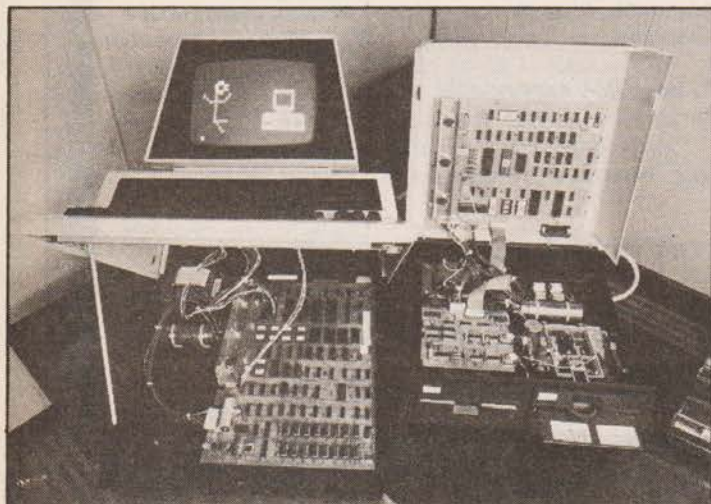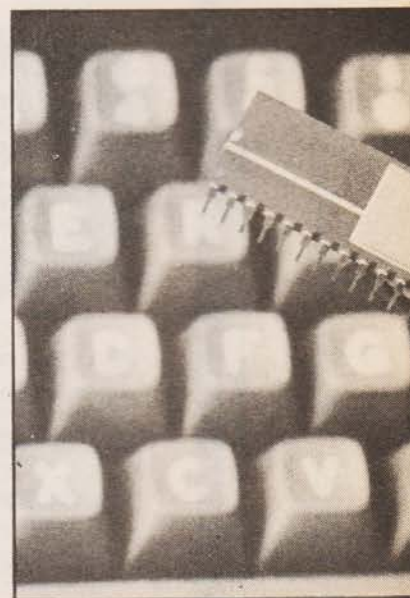

AIM 65 NEW VERSIONS

Portable Microsystems of Brackley, Northants have the Rockwell AIM 65 micro in three new versions. These are the standard board system at £249.50, a cased version complete with power supply, 4K RAM and 8K ROM BASIC. The unit is mounted in a desk-top case and is designated the 56C. Selling price is from £485. The third version is the PDS 65 and is a development system. Produced for programmers and engineers it allows modification and de-bugging work to be undertaken on a customers system. The addition of an optional acoustic coupler allows the field engineer to access the host computer from the point of work. Prices start at £950. For more information contact PM on Brackley 702017.

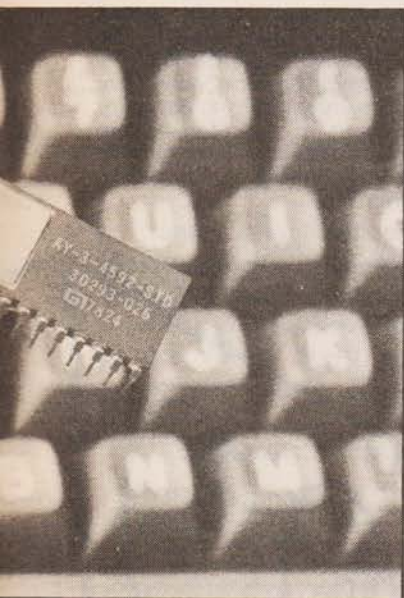

KEYBOARD CHIP


A keyboard encoder IC that can cater for all types of signals, capacitive, Hall effect or switch closure, has been produced by General Instrument Microelectronics. Using NMOS circuitry the 40 pin chip uses pulse detection techniques to cater for 128 keys and has internal protection to deal with key bounce and noise. The keys are connected in a 16 by 8 matrix of which 112 can have up to four 10 bit programmable codes. The remaining 16 keys are reserved for discreet functions. The internal control oscillator scans the keyboard in 1.7 mS which allows burst typing of up to 250 wpm. Power requirements are 5 V and all outputs are TTL and CMOS compatible.

VERO-RACK FOR S100/KM4C

Vero Electronics have launched a new card frame system to solve the designers problem with large format cards. They have introduced a kit for mounting such cards horizontally in a 3U card frame. It can be used with the Vero KM4C card and cases and allows

up to six in a single frame. Supplied with two mounting plates which can be positioned anywhere within the frame to suit Intel, S50, S100,

Motorola, or Double Eurocard sizes. For more information contact Vero at Industrial Estate, Chandler's Ford, Hampshire SO5 3ZR.

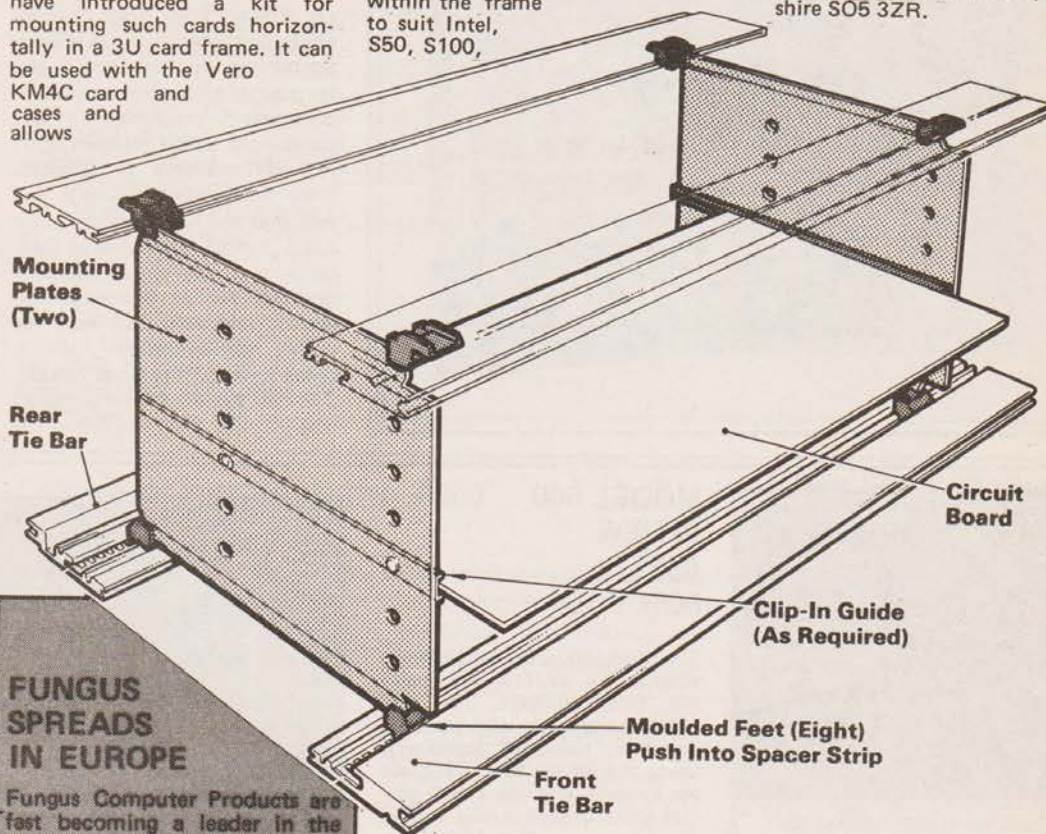

FUNGUS SPREADS IN EUROPE

Fungus Computer Products are fast becoming a leader in the field of compatibles in the UK and Western Europe. The range is being extended to include PDP 11 compatible products, LSI 11 compatible products, PDP 11/70 memories, Large storage module disk sub-systems and the highly successful range of products previously marketed by BML. For further information contact: Pam Ryan, No. 1 Westmoreland House, 2nd Floor - Teall Street, Wakefield, West Yorkshire.

D2 INTERFACE UNIT

One of the only problems with the Motorola D2 evaluation kit is that it cannot easily talk to the outside world. Now Mektronic, a Manchester based company, have announced an interfacing unit for the D2 which changes that. Selling at an inclusive price of £158.76

the unit is ready built and supplied with software listings. The unit connects to the spare PIA on the D2 and gives 16 input or output channels. Powered by the D2's supply the unit can direct drive devices using 0-24 V at 150 mA. For further details contact Mektronic at Linden House, 116 Rectory Lane, Prestwick, Manchester M25 5DB.


SWIFT SASCO PROGRAM BY STAG



Announced this month by Swift Sasco is a programming service for PROMS using a STAG Model PPX universal programmer. It can cope with all the currently available range of Signetics and National PROMS and EPROMS. It is hoped to give a 24 hour turn round service for prototypes and larger quantities can be arranged for the customer. The program can be supplied in one of three forms - truth table, punched tape or a master PROM. Swift Sasco will supply the full range of PROMS for customers own programming. The STAG allows for programming of the new PLA's and PGA's recently announced by Signetics. Contact Swift Sasco at PO Box 2000, Crawley, Sussex.

POWER FROM HAL

Power-One, the largest producer of open frame PSU's have appointed HAL Computers of Weybridge as sole UK distributors. They offer 80 off-the-shelf supplies including ones suitable for the industry standard Shugart mini-floppy drives. All DC outputs are overvoltage protected as standard, not usually found. This is the first venture into the personal computer market by HAL and it is expected that more products will be announced soon. Contact HAL at 133 Woodham Lane, New Haw, Weybridge, Surrey.

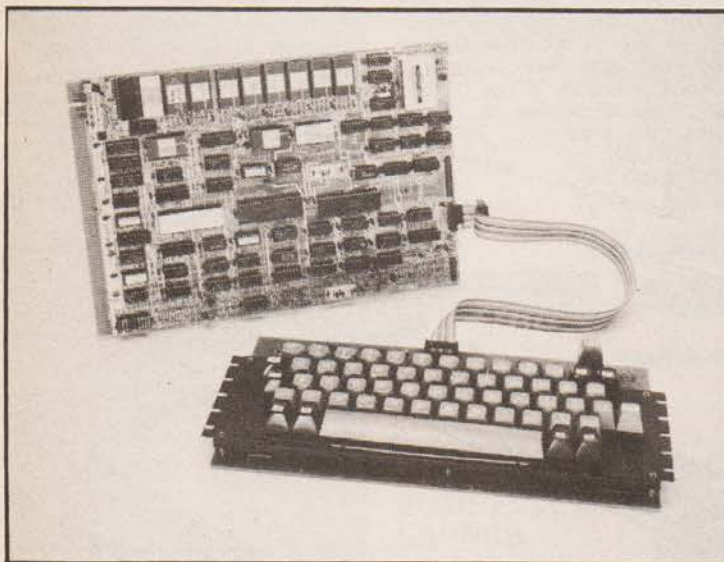

NASCOM (SUPER) 2 IN JUNE

On Friday, 20th April Nascom Microcomputers Limited; announced to the world the launching of their latest small computer system; not surprisingly called Nascom 2. It will be available in quantity from the summer onwards and will cost the lucky owners only £295 + that Very Awful Tax. Until a system becomes available for us to review we cannot comment but here for your consideration is a breakdown of the press release. The new system will be designed around the 4MHz Z80A CPU

which increases the running speed over the NASCOM 1 by about 1 1/4 times. It comes with a quality PCB and full supporting cast of chips including a 16-bit programmable Input/Output port, a much improved cassette tape interface using the Kansas City (CUTS) format at 1200 or 300 BAUD, and an uprated keyboard. The control is provided by a 2K monitor known as NAS-SYS 1. This is completely new and offers 22 commands for entering, modifying and displaying programs, directly accessing input and output port, and making intelligent copies.

The board will contain one chip MK36000 which is a 64K bit Rom and this will hold the 8K Basic, which is an adaption of the Microsoft Basic used by many notable companies. With this

AMPLICON POWER UP

Amplicon are supplying Stevens-Arnold series PSU's ex stock. These deliver +5 V @ 3 A, +12 @ 1 A, and -5 @ 1/2 A and are suitable for the 8080 and similar CPU's. Standard inputs are 12, 24, 28, 48 and 60 volts DC. The 1-9 price is £151. Contact Amplicon at Lion Mews, Hove BN3 6RA.

MODEL 500 IS NEW 6502 FOR YOU

The Model 500 CPU card is being stocked by MUTEK of Quarry Hill, Box, Wiltshire. The card is fully compatible with the Ohio Scientific range of accessories using the 48 pin bus. Designed for systems engineers and general OEM useage it has a 6502 processor, an on-board 8K Micro-soft BASIC with six digit floating point, 4K RAM and an RS232 or 20 mA serial interface. Options include a PIA, 256K memory management capability and up to three 1702 type ROM's. The available accessory boards include an audio cassette interface, graphics board, floppy disk controllers and the full range of peripherals. Power requirements are +5 and -9 volts. Contact Mutek on Box 3289.

DIGITAL MEMORY REPLACEMENT

A single card replacement for four PDP 11/04 or 34 memory cards supplies the full 256K bytes (128 by 18) in one single backplane slot. Designated the NS11/34Q it has been announced by National Semiconductors and has a read access time of 300 nS which is twice as fast as the DEC version. The board includes the parity check and generation which would normally be performed by the M7850 controller. On-board DIP switches set the memory boundaries in increments of 4K. Power requirements are 2.4 A @ 5 V and 1 A @ 15 V. All devices are socketed for easy replacement. Further details from National on (0234) 211262.

MARK OF RESPECT

Apologies are due to Mark Strathern of Lotus Sound because we forgot to credit him for loaning us the Computhink unit from his stocks last month.


The unit shown on our cover belonged to him, and he also provided invaluable assistance in the preparation of the article. Sorry Mark!

S100 VDU BOARDS

Many of you have written in to ask for the PCB foils for our S100 VDU project and as the response has been so good the actual boards will now be produced. Tamtronik are going to make it for us and you should contact them on 021-557 9144. Approximate cost will be £20.

VDU FOR YOU

A new VDU for the low-cost market has been announced by Applied Digital Display Systems and is being marketed by Terminal Display Systems under the name Regent 20. The device can work in half or full duplex modes and uses a five by eight matrix on a 24 by 80 screen format. Included as standard are a printer interface, line monitor, RS232 or 200 mA serial interface, cursor options and a switch selectable character set. The unit is easily accessed for servicing and has an expected MTBF of 7000 hours. For more information contact TDS on 0254 662244.

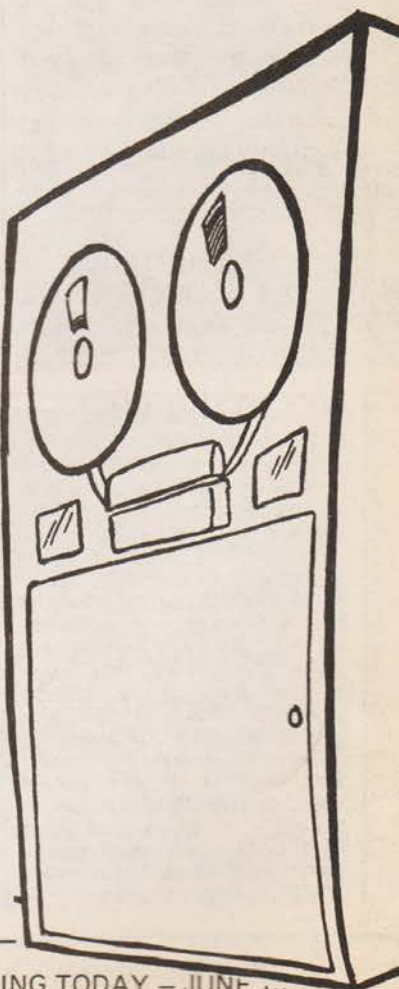


BASIC it should be possible to run most of the basic listings published today without too much modification. (Don't worry NASCOM 1 owners, we will still publish machine code listings — Ed).

An unusual set of commands is the DEEK and DOKE. These are 16 bit versions of PEEK and POKE.

Altogether the board holds 20K of addressable RAM, and the rest of the space not mentioned is for a cleaned-up memory mapped display (1K), a 1K scratchpad used by both the monitor and the user, and 8K of user ram which can be expanded (off board) to 32K. The equipment practice is identical to that of the NASCOM 1 with a good industrial PCB which will plug into the motherboard

already marketed. One difference to the '1' is that all address lines are buffered on board, although if this renders the existing buffer-board redundant I'm not quite sure.

Altogether a system with 8K of user RAM, 8K monitor and 4MHz operation is very impressive. When this is looked at with the other features common to the NASCOM 1 then it certainly warrants a greater inspection. Here in these few lines I have not tried to document all the pros & cons I leave that to the distributors but despite the Managing Directors assertions that this is not a replacement for the NASCOM 1, I feel that for the extra £130 prospective buyers are going to have a lot of heart searching and arguments with the wife.

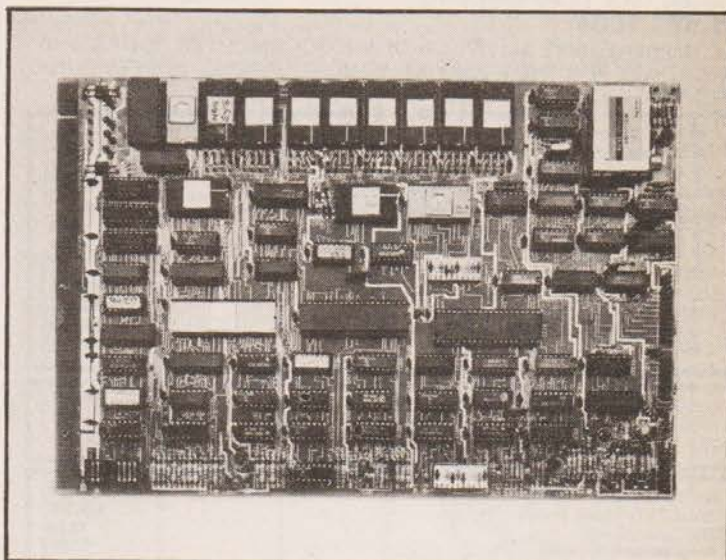

CORRECTION TO NASCOM TUNES

A slight musical discrepancy occurred in piece "Fuer Elise" in last month's issue. Line 24 of this should read:-

5A F3 58 F2 5C F3 58 51
The program is bug-free!

SECOND GENERATION 6800

The evergreen 6800 micro has spawned a second generation version designated the 6802. Retaining all the features of the

6800 it has the added features of an on-chip clock and 128 bytes of RAM. This reduces component count in support circuits,

the bulky 1MHz crystal is replaced by a 4MHz one and the first 32 bytes of the on-chip RAM can be held in low power mode by a Vcc standby during power failure. Expandable up to 65K it is available in plastic or ceramic 40 pin DIP's. For more information contact Jermyn on 0732-50144.

EDITORIAL ENQUIRIES

We regret that our editorial staff are unable to answer queries relating to the relative merits of the many personal computer systems on the market. However if you have any genuine queries regarding articles which have appeared in CT — including system reviews — write to us here, and enclose an SAE.

MICRODIGITAL CATALOGUE

A new brochure detailing the range of product stocked has been produced by Microdigital of Liverpool. The brochure includes details of the Mk 14, Newbear products, Acorn, AIM 65, Nascom, Apple 2 and the

Exidy Sorcerer. Also included are more details on the hire service that we mentioned in last month's news. All the prices for basic systems and available expansion are quoted but unfortunately the book list, Microdigital are stocking a vast selection, was not included. Further information on 051-236 0707.



NEW MICRO CAT

Rapid Recall have published a full price list for their stocks of micro's, memory and support IC's. It includes details of DEC, Intel and Intersil products and is arranged in types rather than manufacturer to make it easy to use. Priced at £1 it can be obtained from Rapid Recall at 6 Soho Mills, Wooburn Green, Bucks.

NEW CENTRONICS PRINTERS

Two new printers are to be launched by the well known firm of Centronics. These are Models 753 and 704. The 753 is a new style of printer, aimed at the word processor market it will offer high quality output with a high document throughput. Micro controlled it features high density printing, proportional spacing, 130 tp 150 cps and a fast slew rate giving it a three times printing speed over the

daisy wheel type. Using an N by 9 matrix head it can give fully formed characters with twice the density of a normal matrix head. Four configurations are available to suit your requirements. The Model 704 is aimed at the data communications market and has a fast print rate of 180 cps, giving up to 400 lines per minute. Using the well proven free flight head it can cater for a variety of paper thicknesses and will print the standard ASCII 96 character set. Baud rates of up to 9600 can be achieved through an RS232C/V24 serial interface. More detail from Centronic on 01-581 1011.

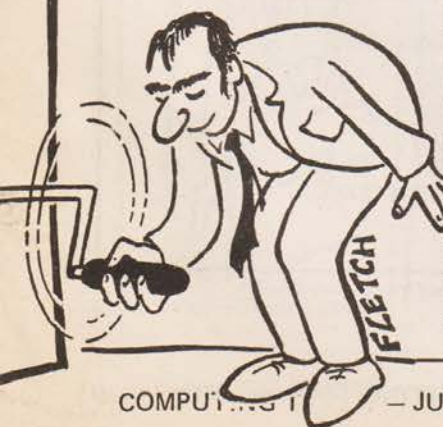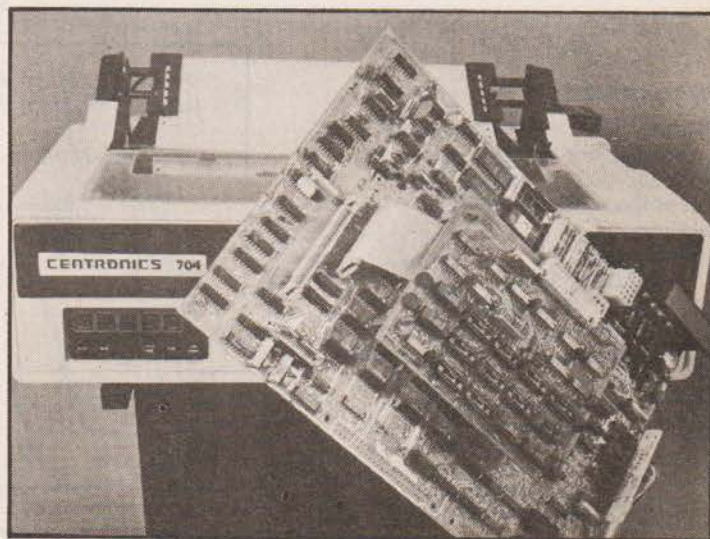

L.P. ENTERPRISES

Room CT
313 Kingston Road, Ilford
Essex, IG1 1PJ, England
01-553 1001

A COMPREHENSIVE SELECTION OF MICROCOMPUTER BOOKS AND MAGAZINES FOR THE HOBBYIST, EDUCATIONALIST, PROFESSIONAL AND RETAILER

Introduction to Microcomputers:	
Vol 0: Beginners Book	£5.95
Vol 1: Basic Concepts	£6.30
Vol 2: Some Real Microprocessors (without binder)	£18.95
Vol 2: Some Real Microprocessors (with binder)	£24.70
Vol 3: Some Real Support Devices (without binder)	£11.95
Vol 3: Some Real Support Devices (with binder)	£17.70
Updating subscription (6 issues) for Vol 2	£18.95
Updating subscription (6 issues) for Vol 3	£18.95
Updating subscriptions for Vol 2 & 3	£30.00
1 Updating issue (specify for Vol 2 or 3)	£4.00
1 Binder (Specify for Vol 2 or 3)	£5.75

6800 Programming for Logic Design	£6.30
8080 Programming for Logic Design	£6.30
Z80 Programming for Logic Design	£6.30

BASIC Computer Games	£5.50
What To Do After You Hit Return	£8.95
8080 Galaxy Game	£8.95
Programming the 6502	£7.95
Computer Rage (A Board Game)	£6.95
Artist and Computer	£3.95
PIMS — A data base management system	£5.95
Games, Tricks & Puzzles for a Hand Calculator	£2.49

Z80 Instruction Handbook	£2.95
8080 Programmers Pocket Guide	£1.95
8080 Hex Code Card	£1.95
8080 Octal Code Card	£1.95

Dr Dobbs Journal Vol 1	£10.00
Best of BYTE	£8.95
Scelbi BYTE Primer	£7.95
Best of Creative Computing Vol 1	£6.95
Best of Creative Computing Vol 2	£6.95
Best of MICRO — 6502 journal	£5.50

8080A/8085 Assembly Language Programming	£6.45
6800 Assembly Language Programming	£6.45
8080 Software Gourmet Guide and Cookbook	£8.95
6800 Software Gourmet Guide and Cookbook	£8.95
6800 Tracer — an aid to 6800 Program D-Bugging	£3.95
Program Design	£4.25

Magazine Subscriptions:	UK Price	Overseas Price
Subscriptions start with 3 weeks		
MICRO-6502 Journal (12 issues)	£14.50	£15.00
Personal Computing (12 issues)	£16.00	£17.00
Interface Age (12 issues)	£20.00	£21.00
Dr Dobbs Journal (10 issues)	£13.00	£13.50
Computer Music Journal (4 issues)	£10.50	£11.00
Recreational Computing	£8.00	£8.50
BYTE (12 issues)	£21.00	£21.00
Creative Computing (12 issues)	£16.00	£16.50
Kilobaud (12 issues)	£20.00	£21.00

Microprocessors from Chips to Systems	£7.95
Microprocessor Interfacing Techniques	£8.15
Z80 Microcomputer Handbook	£7.50
TV Typewriter Cookbook	£7.50
T.T.L. Cookbook	£7.50
CMOS Cookbook	£7.95
IC OP-AMP Cookbook	£9.50
RTL Cookbook	£4.25
IC Timer Cookbook	£7.50
The Cheap Video Cookbook	£4.30

Introduction to Personal and Business Computing	£4.95
Getting Involved with your Own Computing	£4.75
Your Home Computer	£5.95
How to Profit from Your Personal Computer	£5.50
Calculating with BASIC	£4.95
Hobby Computers are Here	£3.95
New Hobby Computers	£3.95
Understanding Microcomputers and Small Computer Systems	£6.50

Users Guide to North Star BASIC	£10.00
Instant BASIC	£7.50
Basic BASIC	£6.50
Advanced BASIC	£6.00
My Computer Likes Me . . . When I Speak in BASIC	£2.75
Introduction to PASCAL	£3.95
SCELBAL — High Level Language + Supplements	£20.00

Accounts Payable and Accounts Receivable	£10.95
Payroll with Cost Accounting	£10.95
General Ledger	£10.95

Basic Software Library:	
Vol 1: Business and Games Programs	£17.50
Vol 2: Maths, Engineering and Statistical Programs	£17.50
Vol 3: Advanced Business Programs	£26.95
Vol 4: General Purpose Programs	£7.95
Vol 5: Experimenters Programs	£7.95
Vol 6: Miniature Business System	£32.50
Vol 7: Chess / Medbil / Wdproc Programs	£26.95

Some Common BASIC Programs	£6.30
Computer Programs that Work (in BASIC)	£2.55
First Book Of KIM	£7.00

8080 Standard Monitor	£9.95
8080 Standard Editor	£9.95
8080 Standard Assembler	£9.95
Special Package: 8080 Assembler, Editor, Monitor	£20.00
Bar Code Loader for 6800, 8080, Z80 and 6502	£1.75
Tiny Assembler for 6800 Systems	£5.75

Magazine Back Issues:	
Micro-6502 Journal	£1.50
Personal Computing	£1.75
Interface Age	£2.25
ROM	£1.75
Dr Dobbs Journal	£1.75
Computer Music Journal	£3.75
People's Computers (recent issues called Recreational Computing)	£1.75
BYTE	£2.25
Creative Computing	£1.75
Calculators and Computers	£1.75
Kilobaud — reprints only	TBA
73	£2.25
Magazine Storage Box (Holds 12)	£1.25

THIS LIST CANCELS ALL PREVIOUS PRICE LISTS: EFFECTIVE JANUARY 1979 DUE TO FLUCTUATIONS OF THE DOLLAR. PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

HOW TO ORDER

Please note our prices include postage and packing, but not insurance, if wanted add 12p for every £10 of books ordered. Make cheques, PO's etc. payable to:

L.P. Enterprises.

CREDIT CARDS accepted
BARCLAYCARD VISA / ACCESS
DINERS CLUB / AMERICAN EXPRESS
N.B. Diners Club orders cannot be accepted by telephone.

Phone: 01-553 1001 for Credit Card orders (24-hr answering service)

Send to address above
Indicate Payment Method:

All Orders must be Prepaid
Total Enclosed £

My cheque, P.O., I.M.O. is enclosed in **Sterling on U.K. Bank**

Charge to Barclaycard/Visa/Access/Diners/American Express

Credit Card No Expiry Date

Name

Address

POSTCODE

Signature

All publications are published in U.S.A. and shipped air-freight by **L.P. Enterprises**. In unusual cases, processing may exceed 30 days.
Prices subject to change without notice.

TRADE ENQUIRIES WELCOME




"I've invented silicone chips capable of controlling nuclear fission".



"You mean . . ."



"Yes — fission chips!"

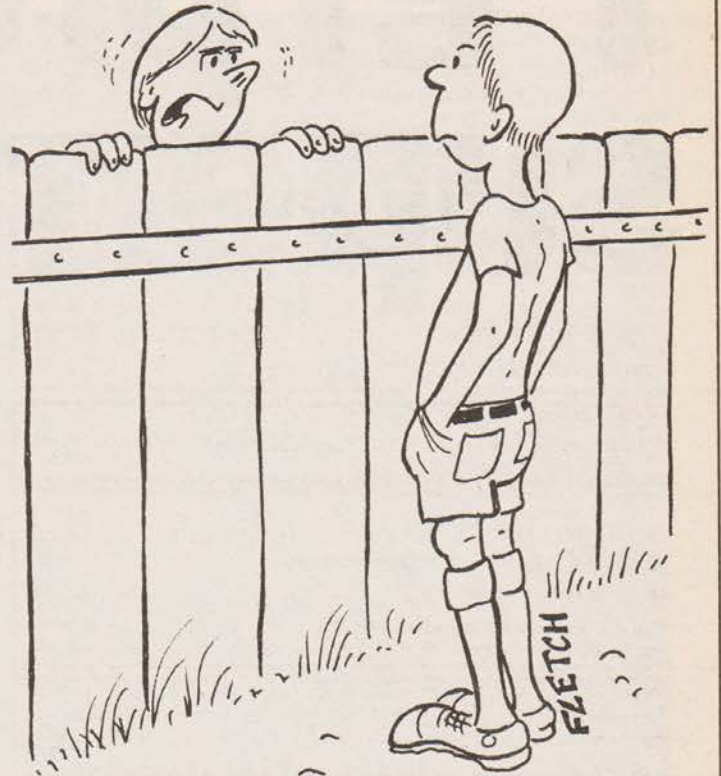

"An' what's more—my dad's home computer is bigger than your dad's!"

HOME
COMPUTERS



"I'd like to exchange it—my wife doesn't like the colour."

Pet program supermarket

At last a whole menu of programs to feed your PET at prices which knock the bottom out of traditional software costs.

Our 16 page catalogue lists nearly 130 programs from £3 to £50 (including VAT). These cover Business Routines, Programming Aids to help you make the most of your PET and some super games to play with it. Here are just a few examples.

MAILING LIST—£15. Stores and prints names and addresses; carries out labelling etc.

INVOICING—£20. Stores pricing information and prints numbered invoices. Handles differing VAT rates, and at least 50 items on 8k PETS; more with additional memory.

WORD PROCESSOR—£25. Composes, edits and prints letters, articles, leaflets etc. Script directives include line length, left margin, centering and skip. Edit commands allow user to insert, delete and move lines, change strings, save and load from cassette, move up and down, print and type.

V.A.T. PACK—£17.50. Two programs, one for output VAT and one for input VAT. Allows data to be entered, processed and stored on tape. Information, including VAT return, can be displayed at any time. 'VAT SCHEME D' is also available for retailers, price £15.00.

STOCK CONTROL—£12. Stores up to 150 items per tape file, under stock number, description, suppliers name and address, and stock level. Auto re-order warning.

MERGE—£8. Joins any program or section to another.

PET BASIC TUTORIAL—£15. Let your PET teach you to program in BASIC. A complete course.

ASSEMBLER/EDITOR—£25. One and two pass Assemblers, Editor and Executor translates assembly language programs into machine code for direct execution.

MICROCHESS—£14. Play chess against PET. Excellent graphics. A superb piece of programming.

ELIZA/DOCTOR—£10. PET converses "intelligently" in this famous simulation of a consultation with a psychiatrist.

PET WORKBOOKS—£15. Five workbooks provide a comprehensive introduction to PET programming. Includes many examples and exercises. Now Volume 6 available, price £3.00.

For further details of these and the other 110 programs in our free catalogue, complete the coupon or call us today.

We also accept credit card orders over the telephone.

These programs are also available from 125 dealers throughout the country.

TRY THESE PROGRAMS AT YOUR LOCAL PETSOFT DEALER

Petsoft

Specialists in personal computer programs

5-6 Vicarage Road, Edgbaston, Birmingham B15 3ES.
Tel: 021-454 5348 Telex: 339396.

Petsoft A member of the ACT Computer Group.

PET is the trade mark of Commodore.

To **Petsoft**

My name is _____

My PET lives at: _____

5-6 Vicarage Rd., Edgbaston, Birmingham B15 3ES
MY PET NEEDS FEEDING Please rush me a copy of your free 16 page catalogue of PET programs without obligation.

COMPUCOLOR REVIEW



The Computer arrived as two separate units, the monitor/CPU/disk drive and the keyboard. As we had a demonstration model which was one of the US versions we also had to have a voltage converter but we understand that the UK versions will not need one (check carefully!!). The first impression of the computer is the neatness and quality of the finish, the disk drive being almost invisible.

Comparing this model we received with the one that the author used for a year we found vast improvements in both physical appearance and quality of display. The main ones are that the disk is now built into the monitor casing and the screen is much less prone to wobble and mis-alignment.

Hard Facts

The hardware is very well documented in a thick 200 page manual that covers basic operation (with full circuits) interface details and chip descriptions. It is really a service manual and it would enable a competent engineer to de-bug most faults.

The processor is based on the familiar 8080 and the main circuit board and support circuitry are housed in the monitor case. The board is mounted horizontally in the case and this is possibly one of the really bad points of the system. The board is held in place solely by the back panel and a single slot arrangement.

This is not a very satisfactory arrangement at all, as the board could easily be knocked out of its holders and even rest against the HT — which would not be a pretty sight.

The VDU is a 13" model and has a reasonably high definition. The picture remains quite steady. The alignment was slightly out on our model but not enough to cause any problems. The screen format is 64 charac-

ters per line with 32 lines per page.

The ASCII character set is 64 characters with a further 64 specials on a five by seven matrix in a six by eight block. The graphics size may be expanded to 128 by 128 blocks and these facilities are discussed in this review. The cursor can be chosen as either visible or transparent and is non-destructive. Compucolour's CPU is expandable to 64K and has 4K RAM for the screen refresh and 4K RAM for the user workspace. The ROM is 16K on-board and contains the BASIC, the file control system and the terminal software. According to the manual it can be expanded to 28K on-board but we could find no sockets for this so presumably there is a sub assembly that will carry the extra memory.

The outputs from the processor are via edge connectors and this is another untidy point against the machine. The three connectors at the rear of the machine provide the keyboard connection, the modem/RS232 port and the 50 pin bus output. For neatness and convenience the RS232 should be put on a standard D type socket and possibly the keyboard as well. The built in floppy disk is a 5¼" type with 40 tracks per side. The data transfer rate is 76.8Kb and the disk holds 51.2K per side. The disk must be turned over to access the opposite side's data. The unit is a Wangco type which are well proven and should cause no problems.

The keyboard is a 72 key version, 101 and 117 key versions are optionally available, and is housed in a sloping front cabinet. The quality of the engraving on the keys is high and the various functions are clearly indicated. Each key can generally do several things by using the ESC and CONTROL functions, and this allows the 192 required codes to be generated. The unit is connected to the CPU by a ribbon cable to the rear edge connector.

An Impressive Start

The author was most fortunate in having actually met one of these machines in an earlier form and was already aware of the power of the operating system. The first indication to of this to a new user is when he tries out the demo disk and it really should be tried before you attempt to use the machine in earnest. The disk is inserted in the drive and the door closed, then all one has to do is press the load key and the disk directory is loaded onto the screen. The American term is MENU and one merely selects an item from this by keying in the number. The program will now load and execute from the start automatically. This capability can be built into any programs that you write and has obvious advantages over a manual system.



The demo disk contains a variety of games and test routines, including a memory test, and these should all be tried to familiarise with the keyboard. The actual programming will be covered later.

The colour and size of the display can also be controlled directly so if you fancy typing in red on a blue background no problem! Having played with the demonstrations the next step is to read the manual on software. It would be most unwise to miss this out as although it is very easy to program in the BASIC you would be missing out on a very powerful system.

Manual Operations

The Compucolor manual is one of the most thorough sets of software documentation that we've come across in a very long time. It starts where it should with the basics of the BASIC language and progresses to really sophisticated programming techniques. The whole document is well indexed and allows for quick reference to any section. The odd Americanism slips in, MENU for Directory, but at least these are consistent and once understood cause no problems. The only oddity is the fact that they always refer to DISK BASIC and yet it is ROM based. The reason is that the BASIC contains the full Disk Operating System (DOS). The sections on the extensions to the language should be read carefully and the liberal scattering of examples tried out.

About half of the manual's 150 pages deal with the

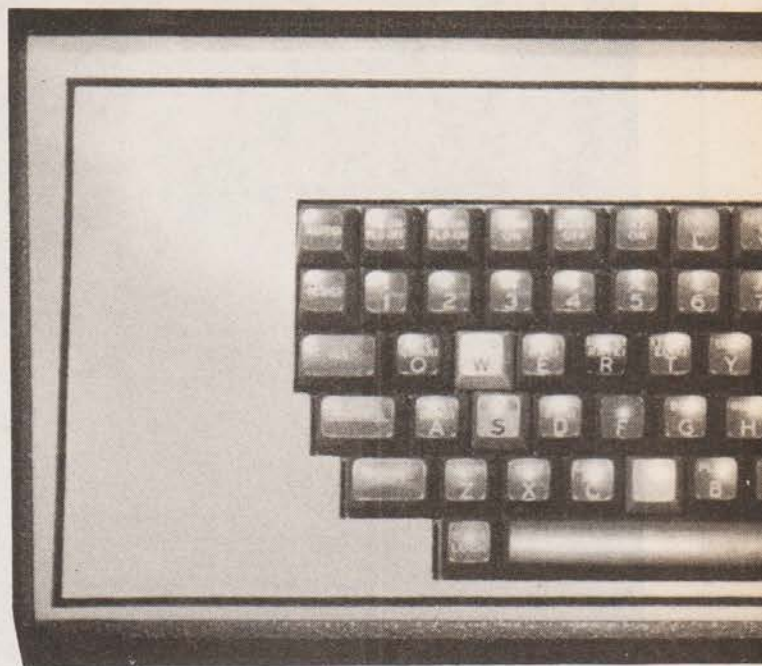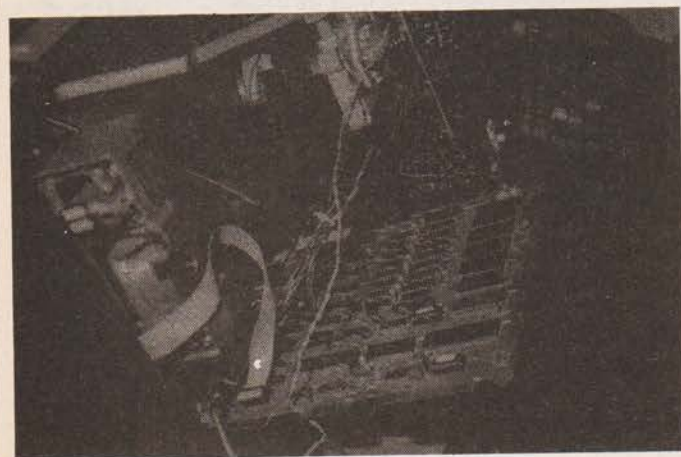


normal BASIC language. The next section is concerned with the colour, graphics and programmable functions. As a measure of the ease of using the manual it took us about an hour to adapt an example program to try out all the color and graphics facilities continuously in each mode. If that sounds a bit simple to you the program loop to perform all the functions takes about 5 minutes to run through.

The manual has appendices covering all the programmable capabilities and all the error codes, etc. It also gives reasonable details on the interface requirements, machine codes and IC descriptions. This documentation is of very high quality throughout and although not light reading is essential to the user. It is a pity that other machines do not go to these lengths with their manuals.

The BASIC Principles

Once the machine has been turned on and initialised the BASIC may be caled direct from the keyboard. This is done by typing ESC W and the operating system then asks for for memory size. If you require the full memory just type RETURN and size. If you require the full memory just type RETURN and the full on-board allocation is available. This may seem to be a waste of time but it does allow you to dimension your memory to the program size. One excellent feature is the BASIC reset key which can be used in the case of a program fault or runaway and resets the BASIC to where you started without destroying your program. This will even work if you press CPU RESET or come out of DOS so it can save many otherwise embarrassing situations.

The actual BASIC implemented on the system is a full extended version and the command set is listed in Table 1. Unfortunately there is no mention of the origination pof language apart from the fact that it originally came from Dartmouth College. From personal

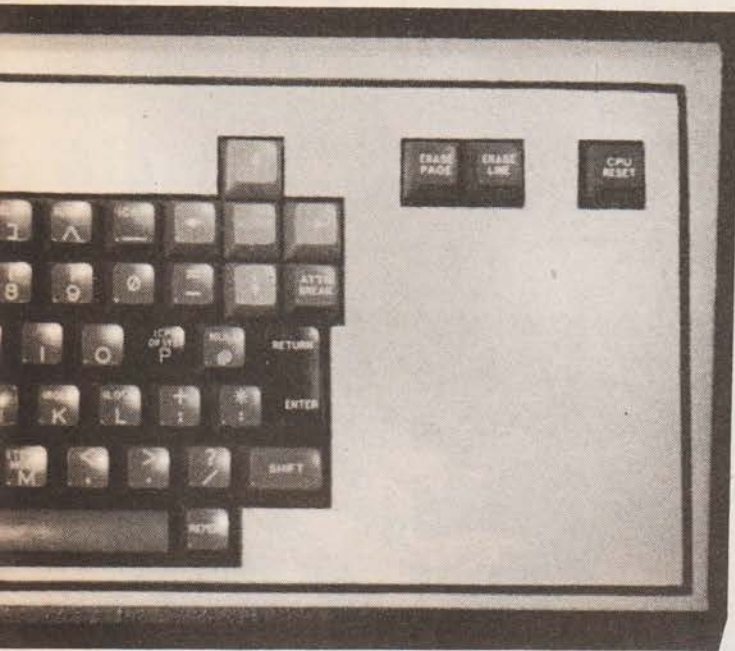

experience it resembles the Microsoft implementation but suffice to say it is very powerful. It really is almost too powerful for amateur use and would provide for a small business user or even as an intelligent terminal.

The fact that the language contains the full disk operating capability means that data is rapidly stored or retrieved and you don't have to hang around waiting for that program to load as it is about 70 times faster than an average cassette based system.

With the comprehensive manuals and the intelligent way that the operating system has been configured the language is a joy to use and strongly reminds the author of the days when he used to play with BIG machines (PDP8's and 11's).

A Graphic Demonstration

The graphics capability of this machine is very impressive and also quite easy to use. The whole graphics section can be accessed by a single BASIC command, PLOT, and the available features are laid out in Table 2. Block graphics may be drawn and there are 64 special characters available as well, similar to those on the PET. The relevant section of the software manual really deserves to be expanded and produced as a separate document as the information is so tightly packed IN THAT IT TAKES SEVERAL ATTEMPTS TO READ: It is not lacking in detail, rather that there is too much.

The best approach to tackle each command is to read the section and run the example program that is supplied, for sections with no example try to re-write the previous one to suit. We found out how to change colours and plot modes in about half a day so it's not too difficult really.

The one section which could be clarified a little is the colour change. To do this the PLOT command is followed by a number or numbers which relate to the various PLOT sub-modes that you want to use. This

also allows you to output characters direct to the screen, for example:

PLOT 65,66,67,68,69,70.

would print ABCDEF to the screen as the numbers are those which correspond to the ASCII codes.

The colour display allows the background and foreground to be set to any of eight colours. These are Black, Blue, Red, Green, Magenta, Cyan, Yellow and White. The foreground may also be set to blink if required, and the character size set to single or double height as needed. All of these functions may be directly accessed from the keyboard or via BASIC.

The individual colours may be selected by separate PLOT commands or by using PLOT 6,x where x is the



The BASIS Command Set

Standard Commands:

CLEAR	CONT	DATA
DEF	DIM	END
FOR	GET	GOSUB
IF	INPUT	LIST
LOAD	NEXT	ON
OUT	PLOT	POKE
PRINT	PUT	READ
REM	RESTORE	RETURN
RUN	SAVE	WAIT
TAB	SPC	


FILE "N", FILE "R", FILE "A", FILE "C",
FILE "D", FILE "T", FILE "E"

String Handling Commands:

ASC (XS), CHR\$ (X), LEFT\$ (XS, I), LEN (XS),
MID\$ (XS, I, J), RIGHT\$ (XS, I), STR\$ (X) and
VAL (XS):

Basic Operations:

+, -, *, /, ^, %, NOT, and, or and the following
relational tests
> =, =, <, <=, >=, <>

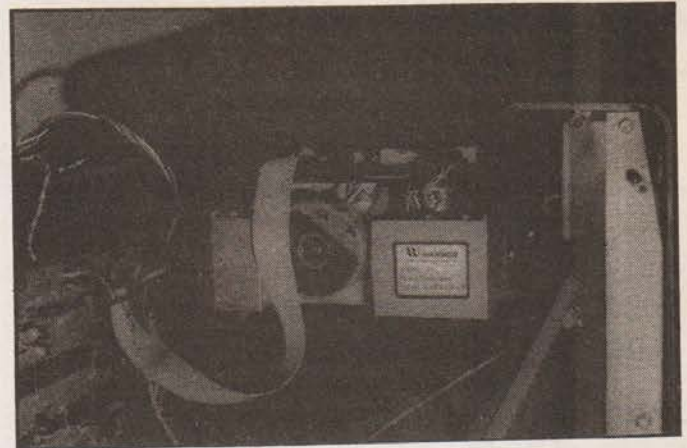

Graphics Functions On The Compucolor

Character Plot

This allows you to plot graphics and block characters.

X Point Plot

This plots a point in the X axis.

Y Point Plot

This plots the Y axis point.

XY Incremental Plot

Plots the previous point incremented in a given direction by a given amount.

X Bar Graph, X0 Value

Defines a horizontal bar graph with its starting position and length.

X Bar Graph, Y Value

Plots the Y value of an X Bar Graph.

X Bar Graph, X Max Value

Plots the maximum value of the Bar.

X Incremental Bar Graph

Defines the increment for a plotted Bar Graph.

Y Bar Graph, Y0 Value

As X type but in Y direction.

Y Bar Graph, X Value

As X type.

Y Bar Graph, Y Max Value

As X type.

Y Incremental Bar Graph

As Y type.

X0 Vector Plot

Draws a vector between defined points.

Y0 Vector Plot

As above but in the other plane.

Incremental Vector Plot

Increments the endpoints of the vector by a defined amount.

decimal value of the binary codes selected in Table 3. For example PLOT 6,97 will give you a blinking Red foreground on a Blue background, Yuk! The colours can be mixed from the table, PLOT 5,6 gives you Magenta on a black background. The plot mode can also access the special character set directly and place them in any position on the screen. The reference position is the bottom left hand corner and you may travel 127 positions away vertically or horizontally. Thus to put a spot at the screen centre the co-ordinates are 63,63. The four corners, clockwise from bottom left, are 0,0 0,127 127,127 and 127,0.

You can have enormous fun with these graphics as they have been well thought out and are quite easy to understand even in a short time. The only observation that can be made is that for the average hobbyist, if there is such a person, they are probably far too powerful and most of the functions will never be used. For a dedicated games 'freak' this machine will be a graphic success and even a small businessman could use the graphics to good advantage when preparing information.

Summary

Overall the Compucolor is a very fine colour graphics machine that has a superb extended BASIC and is easily usable. Like all home machines it has its faults but these cannot be found in the software for a change. The main points that really do need to be looked at on the machine are the lack of proper interface connectors and the shoddy way the PCBs are mounted in the video monitor.

These two points really do downgrade the appeal of the machine to the person who wants to get in and expand the hardware side of the machine. If you simply want a colour graphics computer that is easy to program and is disk based for speed and convenience then this is a serious competitor to the Apple II and slightly cheaper into the bargain. Overall then an impressive machine but badly let down by the construction.

A7	A6	A5	A4	A3	A2	A1	A0
PLOT	BLINK	BACKGROUND			FOREGROUND		
		BLUE	GREEN	RED	BLUE	GREEN	RED

electronics today

international

What to look for in the July issue: On sale June 1st





TELETEXT BOX

ETI goes Teletext next month. A full spec design including full colour and double height characters. Remote control is by ultrasonics, so there is no need to move from your armchair to change the page. The circuit is based upon the Mullard chip set — long awaited that is.

Emphasis has been placed upon ease of construction — the PCBs are plated through and silk screened and everything mounts to the board. With all this offer and with commercial units running at £200 plus you'd expect this kit to cost the earth would you not? Well it will set you back under £160 complete and we don't think that's bad! Don't miss this.

POLYPHONIC KEYBOARD CONTROLLER

We've struck the right chord here. Give up those one note wonders and take up polyphonics — you can't get arrested for it and it'll make your oscillators warble for joy. Play away up to 8 times simultaneously and don't feel guilty about it!

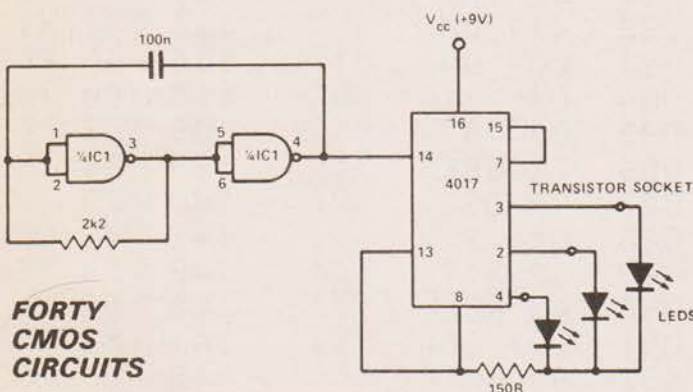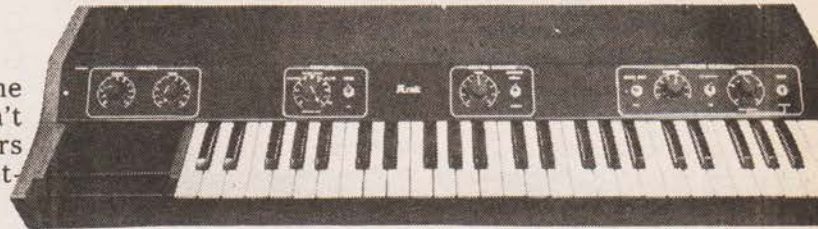


FORTY CMOS CIRCUITS

Another family size, bumper bundle of goodies from our bionic project editor, Ray Marston. In past issues he's covered 555s and 741s. This time it's the turn of CMOS circuits. He's got forty, yes forty, of the little beauties for you. You can't afford to miss them.

SOIL MOISTURE INDICATOR

Don't drown your Dahlias. The most common cause of premature plant death (murder) in the home is over-watering. If you don't want the Sweeney hammering on your door in the middle of the night, we strongly suggest that you build this moisture indicator. Think of it as a happiness guide for your busy Lizzie.

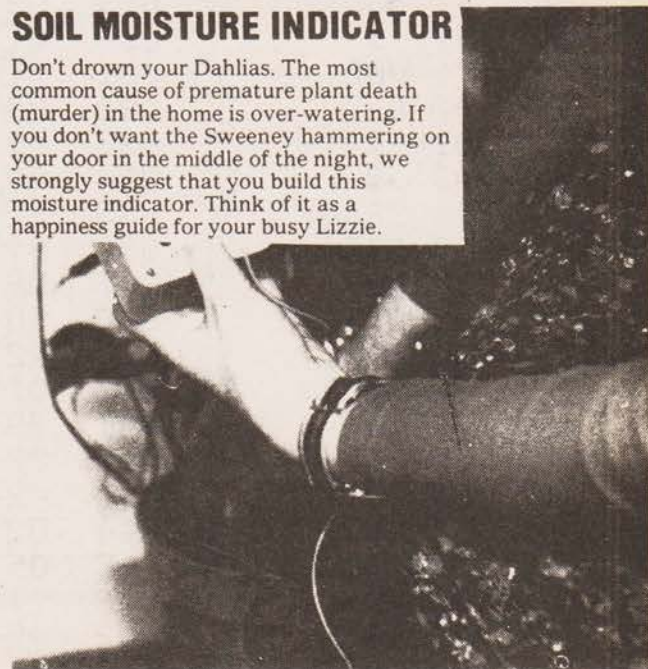

Nim's Game

This program is a calculator version of Nim's game. The object of the game is to force your opponent to take the last match. You may initially specify the number of matches in the pile, the maximum number of matches that can be taken from the pile in any one go. There is also a choice of going first or second.

After some matches have been taken from the pile, you are told the number left. The calculator then makes its move. Zero and numbers greater than the maximum specified are illegal moves and the player will be requested to re-input the number of matches to be taken away from the pile. Negative numbers are treated as positive ones and fractions are truncated.

The program, in its present form, can only be run on a Texan TI59 calculator with printer because of the large number of memories used. If the printer were not used, the number of registers used could be reduced to 5 (00 - 04), but then parts of the program dealing with the printer would have to be omitted. This should cause no problem as there is no absolute addressing in the program. Once the program and date constant have been entered, it is advisable to put them onto magnetic cards (2 required) to save having to type the date again.

To start the program press 'A' for a header on the printer, otherwise 'B'. Then after each number is entered, press 'R/S', and the number is accepted and printed on the printer. In response to the question 'FIRST', a reply of 0 (nought) instructs the calculator to make the first move, any other number enables the player to go first.

PROGRAM LISTING

000	76	LBL	025	00	00	050	50	I×I	103	43	RCL
001	11	A	026	99	PRT	051	99	PRT	104	01	01
002	05	5	027	76	LBL	052	29	CP	105	32	X↓T
003	71	SBR	028	42	STD	053	98	ADV	106	43	RCL
004	97	DSZ	029	02	2	054	98	ADV	107	00	00
005	09	9	030	01	1	055	67	EQ	108	75	-
006	71	SBR	031	71	SBR	056	23	LNK	109	43	RCL
007	97	DSZ	032	97	DSZ	057	76	LBL	110	54	54
008	01	1	033	43	RCL	058	28	LDG	111	75	-
009	03	3	034	00	00	059	02	2	112	01	1
010	71	SBR	035	32	X↓T	060	09	9	113	95	=
011	97	DSZ	036	91	R/S	061	71	SBR	114	22	INV
012	98	ADV	037	59	INT	062	97	DSZ	115	77	GE
013	98	ADV	038	50	I×I	063	43	RCL	116	25	CLR
014	98	ADV	039	42	STD	064	01	01	117	43	RCL
015	76	LBL	040	01	01	065	85	+	118	01	01
016	12	B	041	99	PRT	066	01	1	119	85	+
017	01	1	042	77	GE	067	95	=	120	01	1
018	07	7	043	42	STD	068	32	X↓T	121	95	=
019	71	SBR	044	02	2	069	25	CLR	122	44	SUM
020	97	DSZ	045	05	5	070	91	R/S	123	54	54
021	91	R/S	046	71	SBR	071	59	INT	124	43	RCL
022	59	INT	047	97	DSZ	072	50	I×I	125	54	54
023	50	I×I	048	91	R/S	073	42	STD	126	32	X↓T
024	42	STD	049	59	INT	074	02	02	127	43	RCL
						075	99	PRT	128	00	00
						076	77	GE	129	77	GE
						077	28	LDG	130	35	1/X
						078	29	CP	131	76	LBL
						079	67	EQ	132	25	CLR
						080	28	LDG	133	43	RCL
						081	22	INV	134	54	54
						082	44	SUM	135	32	X↓T
						083	00	00	136	43	RCL
						084	03	3	137	00	00
						085	03	3	138	67	EQ
						086	71	SBR	139	34	FX
						087	97	DSZ	140	75	-
						088	02	2	141	43	RCL
						089	32	X↓T	142	54	54
						090	43	RCL	143	95	=
						091	00	00	144	42	STD
						092	99	PRT	145	53	53
						093	22	INV	146	29	CP
						094	77	GE	147	43	RCL
						095	24	CE	148	53	53
						096	76	LBL	149	22	INV
						097	23	LNK	150	67	EQ
						098	01	1	151	33	X²
						099	42	STD	152	76	LBL
						100	54	54	153	34	FX
						101	76	LBL	154	02	2
						102	35	1/X	155	42	STD

SOFTSPOT

156	53	53	200	42	STD	1330003327.	07	SAMPLE GAMES
157	76	LBL	201	03	03	1345360000.	08	THIS PROGRAM
158	33	X²	202	05	5	3124303036.	09	PLAYS
159	03	3	203	32	XIT	2213301700.	10	NINMSGAME
160	07	7	204	01	1	0.	11	STARTND.
161	71	SBR	205	42	STD	0.	12	15.
162	97	DSZ	206	04	04	2020202020.	13	MAX NO
163	43	RCL	207	69	OP	2020202020.	14	.
164	53	53	208	00	00	2020202020.	15	FIRST
165	99	PRT	209	76	LBL	2020202020.	16	1.
166	22	INV	210	54)	3637133537.	17	TAKE OFF
167	44	SUM	211	73	RC*	3132400000.	18	3.
168	00	00	212	03	03	0.	19	NO. LEFT =
169	04	4	213	84	OP*	0.	20	12.
170	01	1	214	04	04	3013440031.	21	I TAKE
171	71	SBR	215	69	OP	3200000000.	22	3.
172	97	DSZ	216	23	23	0.	23	LEAVING
173	02	2	217	69	OP	0.	24	9.
174	32	XIT	218	24	24	2124353637.	25	TAKE OFF
175	43	RCL	219	43	RCL	0.	26	2.
176	00	00	220	04	04	0.	27	NO. LEFT =
177	99	PRT	221	22	INV	0.	28	7.
178	77	GE	222	67	EQ	3713261700.	29	I TAKE
179	28	LOG	223	54)	3221210000.	30	2.
180	98	ADV	224	69	OP	0.	31	LEAVING
181	98	ADV	225	05	05	0.	32	5.
182	04	4	226	92	RTN	3132400027.	33	TAKE OFF
183	05	5	227	00	0	1721370064.	34	0.
184	71	SBR	228	00	0	0.	35	TAKE OFF
185	97	DSZ				0.	36	5.
186	61	GTO				2400371326.	37	TAKE OFF
187	12	B				1700000000.	38	3.
188	76	LBL	001	11	A	0.	39	NO. LEFT =
189	24	CE	016	12	B	0.	40	2.
190	98	ADV	028	42	STD	2717134224.	41	I TAKE
191	98	ADV	058	28	LOG	3122000000.	42	1.
192	04	4	097	23	LNK	0.	43	LEAVING
193	09	9	102	35	1/X	0.	44	1.
194	71	SBR	132	25	CLR	4532410027.	45	YOU LOOSE
195	97	DSZ	153	34	FX	3232361700.	46	STARTND.
196	61	GTO	158	33	X²	0.	47	5.
197	12	B	189	24	CE	0.	48	MAX NO
198	76	LBL	199	97	DSZ	4532410043.	49	4.
199	97	DSZ	210	54)	2431000000.	50	FIRST
						0.	51	1.
						0.	52	
						1.	53	TAKE OFF
						1.	54	4.
						0.	55	NO. LEFT =
						0.	56	1.
						0.	57	
						0.	58	YOU WIN
						0.	59	STARTND.

CONTENTS OF REGISTERS

1.	00
4.	01
4.	02
21.	03
5.	04
3723243600.	05
3335322235.	06

GENTLEMEN the PET DISK has landed...



The U.K. designed and manufactured Novapac disk system for Commodore's PET*, first seen at Compec '78, is (after extensive industrial evaluation), now available to the domestic user. Its unique saddle configuration continues the integrated design concept of your PET, with no trailing wires or bulky desktop modules.

- **Novapac** may be used with any available RAM plane.
- **Data transfer** takes place at 15,000 char/sec — effectively 1000 times faster than cassette!
- **Storage capacity** is 125 K/bytes (unformatted) on 40 tracks per diskette side.
- **Dual index sensors** permit dual side recording for 250 K/bytes per diskette.
- **Easy operation** full width doors prevent media damage.
- **System expandable** to ½ M/byte on-line storage (4 drives).
- **Dual head and 2D** versions provide 2 M/bytes on-line.
- **Industry Standard IBM 3740** recording format for industry-wide media compatibility only offered by NOVAPAK
- **Dedicated Intel 8048** microprocessor and 1771 FDC minimise PET software overhead.
- **Local hardware and software** support available.

The sophisticated Disk Operating System is disk resident, which allows for future DOS enhancements without hardware alterations. PDOS supports multiple file handling, dynamically allocating disk space to each as and when necessary. Any file may occupy from 1 to 600 sectors as required, at up to 16 non-contiguous locations on the disk, PDOS may be used alone, or within a BASIC program, and offers user-specified password security for any file. Multiple access-modes simplify BASIC program construction.

Novapac dual-disk system complete with PDOS and BASIC demonstration programs on disc **£950 + VAT**. Available from the manufacturer or selected dealers.

Terms: 50% with order, balance on delivery
Full cash with order is subject to 5% discount
VAT-FREE Export arranged (Must be shipped by us)

analog electronics

47A Ridgeway Avenue, Coventry
Tel: 0203 417761

LOOK!

New Self-Contained
12" Monitor for
Your Micro...

Uncased - **£60**
+ VAT & P/P

as above
but CASED £85 + VAT & P/P

The unbeatable
CROFTON 6800 MICRO
is probably the best
value for money today

POWER SUPPLY £20 EXTRA + VAT & P/P

* Including
Tiny Basic and
on board Prom
Programmer

— KIT* —
£220
+ VAT & P/P

Crofton Electronics Ltd.

35 GROSVENOR ROAD, TWICKENHAM
MIDDLESEX - Telephone: 01-891 1923

POWER-one

D.C. POWER SUPPLIES

Now, like Intel, Motorola and National you can buy Power-One open frame power supplies and enjoy quality and reliability at LOW LOW prices. Over 70 different models to choose from including floppy disc drive supplies as well as single, double, triple and quad output.



Single Output

5V at 2.7A w/OVP	£19.50
5V at 5.4A w/OVP	£41.50
12V at 6A	£67.50
15V at 5.4A	£67.50

Dual Output

±12 to 15V at 1.5A	£41.00
±18 to 24V at 0.4A	£32.50
±5V at 5.4A w/OVP	£78.00

Floppy Disc Drive Supplies

— with connectors and cables for Shugart drives if required.

CP-249 — drives one mini drive	£33.00
CP-323 — drives two mini drives	£60.00
CP-205 — drives one Shugart SA800 or equivalent 8" drive	£58.00
CP-206 — drives two SA800	£76.00

Triple Output

5V, 9-15V, -5, -12, -15V at 1.8A to 10.8A
From **£41.00 to £137.00**

Discount available to bona-fide educational establishments. Quantity discounts start at five units. Trade enquiries welcome.
Send large SAE for full catalogue and price list.

HAL

COMPUTERS LTD.,
133 Woodham Lane, New Haw, Weybridge, Surrey
KT15 3NJ. Telex: 8813487.

A new, more powerful monitor for TRITON with many added features

The original TRITON monitor program was written to give the machine code programmer a tool to enter, modify and run programs. It provided routines to drive the keyboard and VDU for Tiny BASIC and routines to enable the user to dump and load programs from a bulk storage medium, namely cassette tape. This first monitor was written to fit into a 1K EPROM (2708) and so it could only provide limited facilities. The author decided soon after building his TRITON that a better monitor was needed to develop machine code programs. At the same time Don Scales (who configured Tiny BASIC for TRITON) decided to use part of the fourth EPROM to extend the facilities of Tiny BASIC. It was therefore a logical step to write an extended monitor for the TRITON using the rest of this EPROM. ROMBUS 5.1 is the firmware package incorporating the upgraded BASIC and HUMBUG. While HUMBUG does not provide all the facilities one would like in a monitor program (eg single step execution), it goes a long way to making life easier for the programmer. The extended Tiny BASIC allows machine code subroutines to be called, so to make the most of your TRITON you will probably want to develop machine code subroutines with the aid of the monitor.

New Functions

The new monitor contains the original seven functions and eight new ones in addition. The new functions are register dump and modify after a breakpoint, continue from a breakpoint, ASCII string creation and display, formatted hexadecimal dump, tape motor on/off control, base conversion between decimal and hexadecimal and vice versa. The final function allows a choice of output device between the VDU and a serial output port. The device onto which output appears depends on the contents of memory location 1401H. In addition hitting the Reset button does not cause the memory automatically to be cleared as we shall see.

The new monitor resides in Read Only Memory (EPROM) from locations 0000H up to 03FFH and from 0DBEH up to 0FFFH. When you switch your TRITON on a power up reset is generated. This is a signal to the computer to start obeying instructions from location 0000H. At this location the computer finds the instructions which set it up ready for you to use. The first of these initialises the stack pointer. This is a pointer to an area of memory which is used to store parameters and return addresses for subroutines. The program then selects the VDU as the output device, clears the screen and announces itself saying:

INITIALISE?

The monitor now waits for a response from you. If the response is 'Y', your TRITON executes a memory test routine. This does a checker board memory test. This involves storing the bit patterns 01010101 and 10101010 in every memory location and checking that each pattern

is correctly stored. When a read back error occurs, the address is stored in locations 1481 and 1482H. This address is used by BASIC to determine the size of the workspace available. The routine then initialises the variable (1402,3H) which determines the Baud rate of the serial interface to 110 Baud and sets up a jump table which is used by Tiny BASIC to access the input and output routines in the monitor.

On returning from this routine or if any response other than 'Y' is typed, the prompt:

FUNCTION? P G I O L W T R C A D H V M B

IS PRINTED: When you type in a character the TRITON checks it against those in the prompting list, and if a match occurs, it jumps to a routine to obey the function. Otherwise the message:

INVALID

is printed and the TRITON waits for another character which it processes in the same way. When a function terminates the TRITON re-displays the prompting message listing the functions available. In some cases if an invalid character is received by one of the functions, the INVALID message will appear and the TRITON will wait for a new function to be entered.

Subroutines And Facilities

Most of the subroutines from monitor V4.1 have been retained but they have all been relocated in order to obtain a more compact program. All of the standard monitor utilities have been maintained and a new one has been created. This new one, called ECHOCH is used by means of a CALL instruction and it fetches a character from the keyboard, echoes it on the selected output device and returns the ASCII code for the character in the accumulator.

The characteristics of the input and output subroutines have been changed slightly. As you will know if you have used version 4.1 monitor, the TRITON accepts unshifted letters as upper case letters and shifted letters as graphic characters. In the old input routine blocks of 32 characters were shifted by the software. This meant that the symbols `[,]`, and required unexpected action of the shift key in order to access them and their corresponding graphics. With HUMBUG this action is not needed and all characters are accessed as depicted on the keyboard. (ie requires shift to be depressed while `[` and `]` do not.)

The character output routine checks the keyboard to see if CONTROL S has been typed before it outputs a character. In the ASCII code this character is called X-OFF and it is used here to temporarily suspend output. If CONTROL S has not been typed, output continues as normal, but if it has the character will not be displayed. Instead the TRITON will do nothing except wait for you to type another character. If the character is CONTROL C, then the computer will re-initialise with the function prompt. If you type CONTROL Q (ASCII code for X-ON) the output will resume with the current character and then continue as normal until the output ends or another CONTROL S is received. If you type any other character it is ignored. This facility to interrupt the output stream is particularly useful when you are using the hex dump function or

listing a BASIC program in order to give you time to read the information before it scrolls off the screen.

You can abort from most of the functions by typing CONTROL C although the computer must be expecting an input character when you type this. This is not the case during the tape input and output functions after a tape has been started, if a machine code program gets stuck in a loop and during a hex dump. You can abort the latter by typing CONTROL S (to stop the output) and then CONTROL C to quit. To quit from the first three cases you can use interrupt 2 to reset. It is alright to use reset since HUMBUG will not clear memory unless you instruct it to, as explained above. If you have used interrupt 2 you will have noticed that your TRITON prints some more information besides FUNCTION etc. This information is a list of the contents of all the 8080 registers after it obeyed the instruction during which you hit the interrupt button. This is especially useful when you use the interrupt to get your TRITON out of a loop because the contents of the program counter tell you where the loops in your program. The program counter is a pointer used by the 8080 to tell it the address in memory of the next instruction to be obeyed. Every time an instruction is executed the contents of this pointer are updated. A typical display after using interrupt 2 is:

```
F A C B E D L H S P P C
46 20 00 00 14 14 00 38 1470 39A7
FUNCTION? P G I O L W T R C A D H V M B
```

Other Major Differences

There are several other important differences to note in HUMBUG compared with monitor V4.1. When you switch your TRITON on or execute a reset and ask HUMBUG to initialise, the memory will not end up filled with 00H in every byte as before. Instead even addressed bytes (eg 1600H) will contain AAH and the odd addressed bytes will contain 55H. This is because the new memory test subroutine uses a checker board technique as explained above to test for short circuits between adjacent data bits. It does not matter that these patterns are left in memory and they will not affect your programs when you enter them. The stack pointer of the monitor has been changed from 1480H to 1470H so that the sixteen bytes between these values can be used by the BASIC to permit greater flexibility. If you have used 1480H as the initial value of the stack pointer in any of your programs, you should change it to 1470H. Finally the result of interrupts 3-7 is a jump to a location between 1430H and 143FH instead of a jump to somewhere between 1618H and 1638H. This has been done to allow you to use interrupts in BASIC programs without having the problem of the interrupts being vectored into your BASIC source statements. If you have already written programs utilising these interrupts or the RST 3-7 instructions you must set up the vectors at the addresses in the table below before running your program.

It was mentioned earlier that a serial output port has been provided. This utilises bit 8 of output 06H as a serial output line. The data is formatted into a serial fashion using software routine. The description given above for the character output routine was slightly simplified. After checking the keyboard for CONTROL S, the routine checks the contents of location 1401H. This location is called the display switch and if it contains 55H then the output is directed to the serial output port. If there is any

other value then output occurs on the VDU. Having ascertained where the output must be directed the routine performs the appropriate operations. The serial output port produces a pulse train using negative logic (ie a Zero is represented as +5V and a one as 0V). The framing format is one start bit (zero) and two stop bits (one's) as shown in Figure 1.




Figure 1 Output format for ASCII 'A'

A fake parity bit is generated for the last bit of the eight bit data field. This format is suitable for TELETYPES etc. where parity checking is not required. To allow time for the mechanics of a printer to perform a carriage return cycle a delay of three character periods is introduced after a carriage return code is sent to the serial port. During the delay a continuous stop level is sent. When the computer is initiated the bit time is set to 9.09 mS which corresponds to a bit rate of 110 Baud or a data rate of 10 characters/second. If you wish to use a printer or VDU at any other speed it is a simple matter to change the speed by changing the sixteen bit value in locations 1402-3H. The required value can be calculated from the following formulae.

$$\begin{aligned}
 \text{Tbit} &= 1 \text{ sec} \\
 \text{Baud rate} &= \text{tcy} \times \text{clock rate} \\
 \text{tcy} &= 9 \text{ sec} \\
 \text{tcy} &= 1.255\mu\text{S for 7.16MHz clock} \\
 n &= \text{Tbit} - 107 \\
 &= 24 \\
 \text{eg for 110 Baud} \quad \text{Tbit} &= \frac{1}{110} = 9.09\text{mS} \\
 n &= 9.09\text{mS} \times 107 \\
 &= 972.63\mu\text{S} \\
 &= 24 \text{ or } 0129\text{H}
 \end{aligned}$$

The minimum value of n is 001H which corresponds to about 6K Baud. Hopefully by now you will have realised that it would be possible to change from outputting on the VDU to outputting on a printer whilst your programs are running. Listed below in listings 1 and 2 are the machine code and BASIC instructions to do this. The machine code version includes the hex instruction codes.

```
3E 55 MVI A,55H
32 01 14 STA A,1401H ;SET PRINTER MODE

3E AA MVI A,AAH
32 01 14 STA A,1401H ;SET VDU MODE
```

Listing 1 Machine code instructions to change o/p mode

```
a = 21760
POKE 5120,A ;REM SET PRINTER MODE
```



```
B = 22016
POKE 5120,B      ;REM SET VDU MODE
```

Listing 2 BASIC instructions to change o/p mode

Obviously the BASIC instructions can use any variables but you are not allowed to poke a constant. When the POKE 5120 instructions are used location 1400H has 00H written into it. This is the same as the value put there when the character input routine is entered. If you wish to use the serial output facility you must connect an interface between the output port and your peripheral device. It is quite likely that you will require either an RS232C or 20 mA loop signal and circuits to generate these are given below in Figure 2. For other interface signals you will have to design your interface. In this case remember that the port produces negative logic.

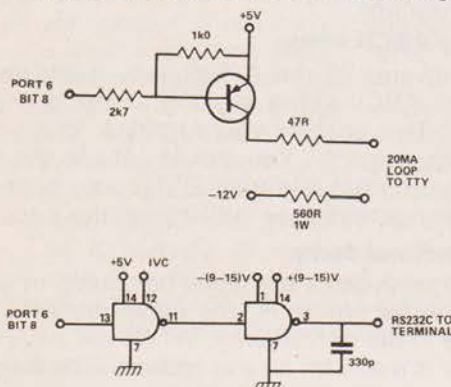


Figure 2

We will now look at the functions in turn and see exactly how to use each one. Except for the R and B functions you only need to type a single letter to invoke a function. You should not type carriage return.

P — Program

The purpose of this function is to allow you to enter machine code programs into your TRITON's memory. When you type P in response to the function prompt, HUMBUG will respond with:

PROG START = .

You should now reply with four hex digits to specify the address at which you wish to start programming, followed by carriage return. If you type a wrong character you can correct it by typing CONTROL H until the cursor points to the wrong character. You must then retype the rest of the address again. When you type carriage return, HUMBUG will print the address on a new line followed by a space and two hex digits to represent the data held in that address and finally another space. Your TRITON will now wait for you. You can modify the contents of the memory location by typing two hex digits followed by carriage return. Once again errors can be corrected by typing CONTROL H and retyping the character(s) deleted. Whether you change the contents of the memory location or not, you have the choice of stepping on to the next location by typing carriage return or stepping back to the previous location by typing up arrow (SHIFT^). This facility gives you the chance to correct errors in a memory location after you have moved on to

another location. When you do not want to change the contents simply type carriage return or up arrow depending on which location you want to open next. After you have finished type CONTROL C to quit back to the monitor loop.

G — Go To Program

This function enables you to start programs anywhere in memory. After typing G, the prompt:

PROG START =

is displayed. Once again you must specify a four digit hex address and this can be corrected as before. After you have typed carriage return, your TRITON will immediately jump to the address specified. (eg Type G 0400 and your TRITON will jump to Tiny BASIC which starts at address 0400H.)

I — Input from cassette tape

The function enables you to input a program from a previously recorded audio tape. After typing I, HUMBUG will ask you for the header code of the program that you wish to load with the prompt:

TAPE HEADER = :

When you have typed the name and carriage return, the tape recorder motor is started automatically and then FILES FOUND: is printed on display. When a header code is found it is printed on the next line. If this is a perfect match with the name that you specified, then the cursor will stay on the same line and the program will be loaded to 1600H. At the end of the file, the motor is turned off and HUMBUG will say END then re-initialise with the FUNCTION? prompt. If the header code is different the cursor will move to the beginning of the next line and the computer will search for the next header code which does not exist on the tape (eg just header code which does not exist on the tape (eg just type carriage return) you can produce a list of the programs stored on the tape. The programs are recorded onto the tape at 300 Baud.

O — Output a program to tape

This is complementary to the above function and it allows you to dump programs on tape. Once again you have to specify the tape header code. This code is recorded onto tape as an identifier before the program. BASIC programs are recorded onto tape automatically but you must set the programs and address for machine code programs before you enter the O function. This involves putting the address of the first location after your program into 1600 and 1601H in the normal 8080 format with the least significant byte first. When the whole program has been dumped, HUMBUG responds with END and the function list prompt. The recording format is:

About 5-6 seconds of mark tone
64 bytes of leader code (0DH)
Program end address
Program
About 5-6 seconds of mark tone

L — List memory

This function allows you to list the contents of fourteen memory locations at once, but not change them. HUMBUG asks you for a start address and after you have

typed an address and carriage return your TRITON will print the address and contents of the next fourteen locations down the left hand side of the display. When the listing stops, you will see the prompt MORE? at the end. If you type Y(yes), the contents of the next fourteen locations are printed and so on. If instead you type one of the function letters, that function will immediately be invoked. Typing anything else will cause HUMBUG to display the INVALID prompt.

W — Typewriter mode

After typing W your TRITON will act as if it were only a keyboard connected to a display. Everything you type is echoed onto the selected output device. When you use the VDU all the graphics are displayed and the cursor control codes act as normal. To get out of this mode you must type CONTROL C.

T — Tiny BASIC

When you type T your TRITON executes a jump to Tiny BASIC and you will see the message:

```
BASIC L5.1  
OK
```

You should read the separate section to find out how to use the BASIC interpreter.

R — Register dump and modify

This function is probably the most useful one for debugging machine code programs. After typing R nothing will appear to happen. In fact the computer is waiting for you to type another character. If you now type SPACE the register contents will be dumped in the same format as described earlier in connection with interrupt 2. It should be realised that these are not the contents of the 8080 registers at the present moment but the contents of a set of virtual registers. They were the contents of the registers last time an interrupt 2 occurred.

To modify any register you must type the letter that represents the register as the second letter of the function call. For the processor status word (flags) use F, for the stack pointer use S, and for the program counter use P. The display will show a two or four digit hex code as appropriate followed by space. If you wish to change the value you can type in a new hex number of the correct number of digits (the same number as displayed). Alternatively, to leave the contents unchanged, simply type carriage return. You would normally use this function in conjunction with the continue function and breakpoints. We shall see how later.

C — Continue

This function loads the values of the virtual registers into the 8080 machine registers. Since the program counter is one of the registers which is loaded, the computer effectively jumps to the value put into the virtual program counter. If you wish to run a piece of program a number of times you can set up the value of RP as the start address of the program and simply press C each time to run the program. A more important use of this facility is when you want to test a part of a program starting with values which would have been left in the registers by the previous part of the program. To do this use Rx commands to set up the registers and the program counter and type C to start.

A — ASCII string insert

The use of this function is to put ASCII strings into memory for use by machine code programs. Typically you will want to have prompts, etc. displayed by your programs and this allows you to insert the ASCII strings without having to look up the hex code for each character. After you type A, HUMBUG will ask for the starting address of the string. When you have entered this the cursor will step onto the next line. Anything you now type, including cursor control codes, will be stored in memory and echoed back. CONTROL H will delete characters from memory. When you have finished type CONTROL D (EOT code). The EOT code will be stored in memory and then your TRITON will re-initialise. If you do not want the EOT code to be stored, terminate the string with CONTROL C which will not be stored either. The EOT code allows you to display the strings by calling PDATA from your programs.

D — Display ASCII string

This is the reverse of the A function. It allows you to print out the ASCII string starting at the address that you specify. This enables you to check that you have entered strings correctly. You should not use this function for strings that do not end with EOT code, because this function does not terminate until it finds this code.

H — Hexadecimal dump

This function produces a formatted hex dump of a section of memory. After typing H, the computer asks for the start address in the normal way. When you have entered this a request is made for an end address with the prompt: PROG END = .

After you have specified this, the start address is printed at the start of the next line, followed by up to sixteen data bytes. The number of data bytes on the first line is such that the next line starts at address xyz0H. On each line of the dump the address of the first byte on the line is printed followed by the sixteen data bytes. The function is a useful way of obtaining a printed listing of a machine code program.

V — VDU switch

This function is used to select the serial output port when output is on the VDU and vice-versa. After you have typed V nothing else happens on the current output device until it is reselected. The FUNCTION? prompt is printed on the newly selected output device. You can then carry on as normal with all output appearing on the newly selected output device but note the restriction above for the tape input routine. If the function fails to work it means that the data in the display switch is corrupted. Set the value in location 1401H to AAH and try again.

M — Motor control

In the original TRITON design the tape recorder was automatically controlled by the tape routines and there was a manual override facility for fast winding. The automatic control of the tape recorder has been retained in HUMBUG but the over-ride facility has been incorporated into the software. If the motor is turned off and you type M, the motor will be turned on and vice-versa. This facility is particularly useful when you try to input from tape a non-existent file and have to abort by using a reset or interrupt 2. Doing this leaves the tape motor running. Typing M will stop the motor. This facility makes the front panel over-ride switch redundant so you can disconnect the

switch and use it for one of two things. Firstly it can be used as a pause button and secondly it can be used for interrupt 3.

B — Base Conversion

This function is provided mainly for the convenience of the BASIC language programmer. The PEEK, POKE, READ, WRITE and CALL commands each require an address which must be specified in decimal. It is most likely that the address of data that you know will be in hex so this routine, which works with sixteen bit two's complement numbers, saves you the trouble of carrying out the calculation on paper in binary! After typing B the computer will wait for you to type D or H. This second letter represents the base to which you wish to convert. Hence to convert from hex to decimal type D. Any other letter that you type will be flagged as an error. If you typed a D, HUMBUG will be expecting you to type a four digit hex number. If you wish to convert a two digit number, you must insert two leading zeroes. When you type carriage return the decimal equivalent of the number displayed including a negative sign where appropriate. If you typed H, HUMBUG will expect a decimal number to be input in free form. This means that you can specify a sign if necessary and need not specify leading zeroes. Try BH -1 and you should get FFFF as the hex value returned. The formatting of numbers has been made compatible with the representation of sixteen bit numbers elsewhere in ROMBUS 5.1 (ie four digit hex numbers in HUMBUG and free format decimal numbers in BASIC).

Breaking And Entering

We have now seen what all of HUMBUG's functions can do and we will now see how to make use of them to debug a program. Enter the program shown in listing 3 exactly as shown, (yes it has got an error in it!), using the P function. Try using the up arrow facility (SHIFT ^) to step back down memory at some point. After you have entered it obtain a hex dump using the H function. The start address should be 1600H and the end address should be 1610H. Note that you can stop the output by typing CONTROL S and restart it by typing CONTROL Q. Now carefully check the listing given against the dump you have obtained. If there are any errors go back and correct them with the P function. The aim of the program is to clear the VDU screen and then print the alphabet on the top line of the screen. Now using the A function, enter the alphabet from A-Z starting at 1700H. Terminate the string by typing CONTROL D. Type G 1600 and you should see the screen clear and the letter A appear in the top left hand corner and the re-initialisation message appear on the next line. This is not what the program should do and we must now debug it to get it working correctly. Clearly the jump to NXTCHR is not being executed. We will now set a breakpoint so that we can see what is happening when this point in the program is reached. A breakpoint is a way of stopping execution of a program at a particular point and returning to the monitor in such a way that the previous execution of the program can be ascertained. As we have already seen an interrupt 2 causes the states of all the registers to be saved and displayed on the screen. The interrupt signal can be generated by software using the RST 2 instruction (D7H). Because interrupt 2 causes the registers to be dumped into the virtual registers you must not use this interrupt to terminate a function when you are working with breakpoints or you will lose the values of the

registers used by the program. Use CONTROL C instead. It is a good idea to get into a habit of doing this always. To set the breakpoint use the P function to change the contents of address 160BH from CAH to D7H. Now start the program again from 1600H. Again the screen will clear and the A will be printed and then the registers will be dumped as described before. The registers that are of interest are A.F.D. and E. You will see that the stack pointer is set to 1470H (the monitor stack area) by default. The program counter is pointing to the address of the RST 2 instruction plus one (160CH). The value in the DE register pair is 1701H as we would expect. (We loaded it with 1700H and incremented it once.) The value of the accumulator is 41H which is the value loaded from the data buffer. Obviously 41H is not equal to 5AH and if we look at the flag byte we will see that the zero flag is cleared to indicate this. The format of the flag byte is:

SIGN ZERO xx AUX CY xx PARITY xx Carry

Clearly the sequence of execution will not be affected by the jump if zero instruction. We must change this instruction to a jump if not zero. Using the P function again change the instruction at 160BH to C2H. Now using the RP function change the program counter to 160BH the address we wish to continue from. By typing R SPACE you can confirm that A = 41. PC = 160B, D = 17 and E = 01H. If we now type C the register values will be reloaded and the program will continue from 160B as if it had never been interrupted. The computer encounters the JNZ instruction and since the flags indicate non-zero the jump will be executed. What you should see is the C that you just typed followed by the alphabet from B-Z and then the re-initialisation message on the next line. If this is what you see then the program works (It has already done the rest before we interrupted it.) and if you type G 1600 the program will do what we said it would.

1600	RST 1	CF	; CLEAR SCREEN
1601	LXI D,1700H	11	; SET POINTER
1602	—	00	; TO DATA
1603	—	17	
1604	NXTCHR: LDAX D	1A	; GET CHAR
1605	INX D	13	; BUMP PTR
1606	CALL OUTCH	CD	; PRINT A
1607	—	13	; CHARACTER
1608	—	00	
1609	CPI 5AH	FE	; WAS IT Z?
160A	—	5A	
160B	JZ NXTCHR	CA	; NO SO GET
160C	—	04	; NEXT LETTER
160D	—	16	
160E	JMP START	C3	; YES SO GO
160F	—	60	; MONITOR
1610	—	00	

Implementation of ROMBUS 5.1

ROMBUS 5.1 consists of a set of four EPROMS which are available ready programmed from TRANSAM COM—PONENTS LTD. at 12, Chapel Street, London, N.W.1. To obtain these you should send your old EPROMS back and they will be reprogrammed with the new software and a fourth EPROM supplied. The EPROMS are labeled HUMBUG A and B and BASIC A and B. The BASIC should be plugged into the socket where MONITOR V4.1 was and HUMBUG B should be plugged into the fourth EPROM socket.

IN SCOTLAND

IN SCOTLAND

NASCOM 1

Z80 Microcomputer kit

Undoubtedly the finest value for money kit available anywhere. Fully socketed.

INTERFACE FOR:

TV (UHF)
TV Monitor
Cassette
Teletype
32k Ram expansion board

May be seen working
9 a.m. - 5 p.m. Mon.-Fri.

Callers welcome

Please note that the Nascom is occasionally in use at exhibitions.

Please telephone before calling to avoid disappointment.

Price £165.00 + VAT (8%)

Now in stock: 8K RAM, 16K RAM, 32K RAM, BUFFER BOARDS, 3K SUPER TINY BASIC ZEAP ASSEMBLER, MINI-MOTHER BOARDS. We now stock a variety of books on the subject of personal computing.

STOP PRESS

Now in stock at last

8K BASIC ON TAPE

All normal commands including


1. Full Log and Trig functions
2. Variables — any length
3. Over 20 functions
4. Fully compatible T2, T4 and D-Bug monitors
5. Strings to 255
6. Multi-dim arrays

Price inclusive of VAT and P + P

£37.80

Other products on the way — please phone for details.

Callers welcome



STRATHAND
44 ST. ANDREW'S SQ.
GLASGOW G1 5PL
041-552 6731

Callers welcome



Tel. order welcome with Access and Barclaycard



The twin mini floppy disc system provides off line storage of programs and data using IBM 3740 compatible formatting providing 128 bytes per sector 16 sectors per track 40 tracks per disc. Media is reversible.

The drive and controller are housed in a saddle maintaining an integrated configuration, one of the major features of the PET. Connection is via the PET memory or IEE port. The system comes complete with a PROM for booting the disc resident P-DOS into RAM. P-DOS is completely transparent to BASIC. Control of the disc system is via PET BASIC USR instruction with simple commands from either the keyboard or under program control.

The following commands are available LOAD, SAVE, CREATE, DELETE and CATALOGUE. The file management system provides for up to 8 files to be opened concurrently. Files can be opened in READ, WRITE, UPDATE and APPEND mode. The user may write his own disc system modules to expand the facilities of the disc resident system.


£850.00 excluding VAT.

Applications programs available for sales, purchase and general ledger as well as stock control, payroll and cost accounting.

PICO OYTE production of software with Technology International **PICO OYTE** 65 VICTORY CLOSE BRISTOL EDGEMONT BIRMINGHAM B5 7UP

CT MARKETPLACE

CLOCK RADIO

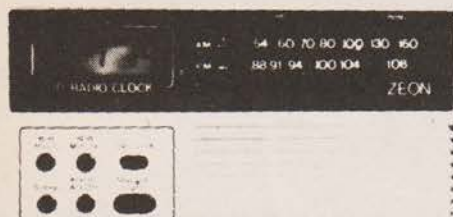

You probably won't believe us as we're selling the goods but we're going to tell you anyway! We have *rejected* eight clock radios for Marketplace, they were all cheap enough but the quality was so poor that we couldn't have lent our name to them. However, we are now able to offer a portable LCD Clock Radio to you which meets our standards.

The clock is a 12-hour one with AM/PM indicated and a back light. The radio is Medium Wave and FM with very nice quality for a small speaker — for FM there's a telescopic aerial. The alarm can be either a 'beep-beep' type or the radio, there's also a snooze facility.

The case is sensibly rugged and is printed on the back with a World Time Zones map, a bit of a cheek really, especially as the time is relative to Japan!

We won't even mention the RRP — but just check on comparable prices — you'll find ours a bargain.

An example of this Clock Radio can be seen and examined at our Oxford Street offices.

£20.50

(Inclusive of VAT and Postage),

To:
CLOCK RADIO Offer,
ET Magazine,
25-27 Oxford Street, London W1R 1RF.


Please find enclosed my cheque/PO for £20.50 (payable to ET Magazine) for my Clock Radio.

Name

Address

Please allow 28 days for delivery.

DIGITAL ALARM MK2

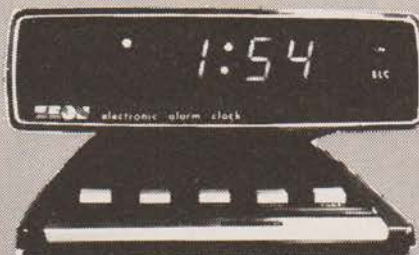

Both ETI and Hobby Electronics have sold a lot of digital alarm clocks — over 10,000 in fact — maybe that's something to do with the fact that we sell at real bargain prices. Now we can offer you a truly modern, space age model.

It includes all the facilities expected in a good design — fast, slow setting, snooze facility, etc plus two unusual features — automatic brightness control and a weekend alarm cancel.

An example of this clock can be seen and examined at our Oxford Street offices.

£10.50

(Inclusive of VAT and Postage)

To:
DIGITAL ALARM CLOCK MK2 Offer,
ET Magazine,
25-27 Oxford Street,
London W1R 1RF.

Please find enclosed my cheque/PO for £10.50 (payable to ET Magazine) for my digital alarm clock.

Name

Address

Please allow 28 days for delivery.

ALARM-CHRONO LCD



Currently this watch is being discounted elsewhere for typically £39.95 (we don't quote RRP as this is meaningless) and the watch is a 'Chinese copy' of a very famous one in the £100 range!

The facilities are exceptional:

- Normal hours and minutes
- Continuous seconds or data display
- Day of the week
- Stopwatch with 0.1 secs resolution
- Lap time facility with automatic return to stopwatch after 6 seconds
- Different time zone setting with independent date, day of week settings
- Good bleeping alarm
- Easy time correcting: on the sixth 'pip', press a button and it's reset to 00 seconds as long as watch is plus or minus 29 seconds.

It comes with a full guarantee of course.

An example of this watch can be seen and examined at our Oxford Street offices.

£27.95

(Inclusive of VAT and Postage)

To:
ALARM/CHRONO LCD WATCH Offer,
ET Magazine,
25-27 Oxford Street,
London W1R 1RF.

Please find enclosed my cheque/PO for £27.95 (payable to ET Magazine) for my Alarm/Chrono LCD watch.

Name

Address

Please allow up to 28 days for delivery.

Another adaptor for the PET that allows you to connect to a serial device

A couple of months ago we received the Petsoft CMC1200 IEEE to RS232 adaptor. Well this month we received another from a London company called 3D. As we had by now built our Heathkit printer it seemed an ideal opportunity to test both of them out. Although this review is primarily about the adaptor we have made one or two comments on the printer as well. We hope to publish a full report on the Heathkit at a later date.

What Your Money Buys

The interface adaptor comes in a single black box about 8" by 4½" by 2½" and is complete with all the necessary leads and plugs, etc. Inside the unit is a mains transformer and all the interface circuitry necessary to give either an RS1200 and these worked quite happily with the printer. (The Heathkit can actually go up to 9600 Baud but the manual advises you not to use it)..

The PCB is of commercial quality and neatly fits into the case with the various adjustments nicely to hand. All the leads are taken through "Heyco" type grommets and these ensure a secure fastening. The PET lead is neatly equipped with a covered edge connector and will only fit one way round.

The RS232 lead is supplied with a standard "D" type (25 way) socket and again this is covered.

The only other obvious features of the unit are the two LED's and fuse holder. The LED's indicate "power on" and "listening."

The Heart Of The Matter

The circuitry of the interface is obviously UART based and the Baud rate clock is crystal controlled, but as some industrious person has sanded the IC numbers off the chips we can't tell you a lot more!

The Baud rate selection is done by using three of the switches on a four way DIP switch, the fourth being used for stop bit selection. The parity is set to EVEN.

Adjustment of the Baud rate is easy and using the code sheet provided in the instruction leaflet takes no time at all.

Program-A-Port

Five sample programs are listed in the instruction leaflet together with their expected printouts. To obtain a simple program listing via the adaptor the following instructions should be typed in:

```
OPEN 1, 4
CMD 1
LIST
```


After typing CMD 1 the listening LED should be lit to indicate that the port has been called. When the listing is completed it is necessary to return the PET to the keyboard mode and this is done by creating a syntax error. This is easily done by typing a character on the keyboard followed by RETURN and the READY prompt will appear on the screen. The listen LED should go out at this point.

As the PET does not output actual space characters but relative tabs it is necessary to program the device to stop columns appearing all over the place and the adaptor has the necessary logic built in to overcome this problem.


The programming examples contain useful little tips like this. If you require a previously written program to print instead of display you need only to type:

```
OPEN 1, 4
CMD 1
RUN
```

and this will direct all the PRINT statements to the printer rather than to the screen. You may include the first two commands as part of your program but you will also have to insert the instruction CLOSE 1, 4 at the end of the program.

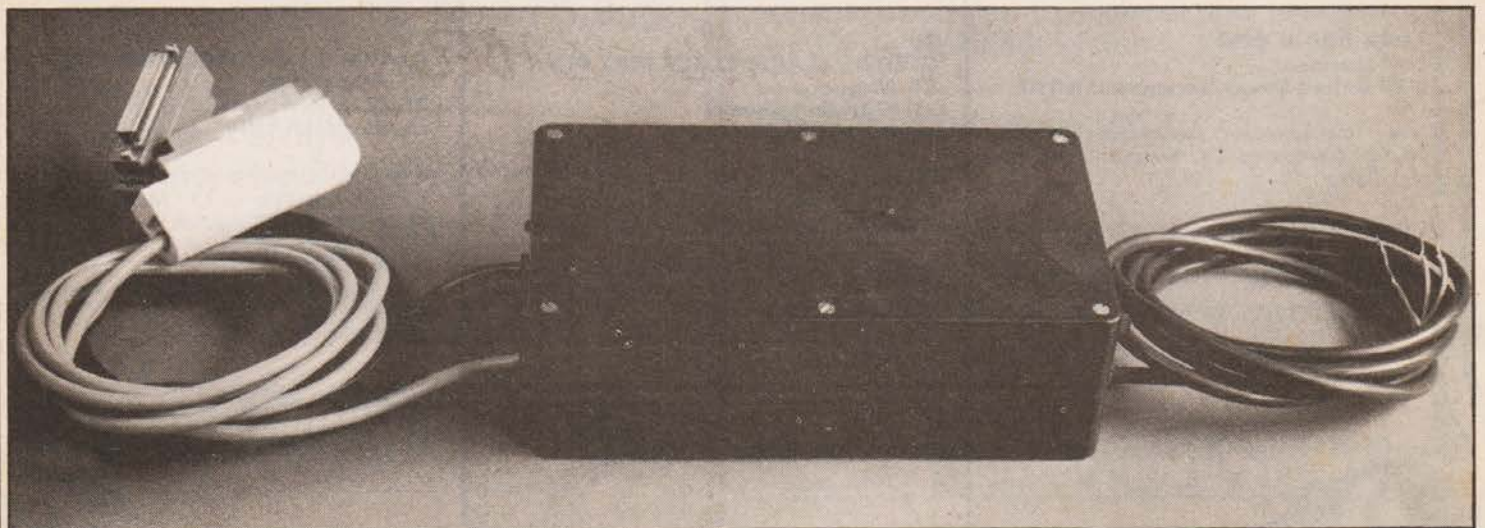

PET PORT II

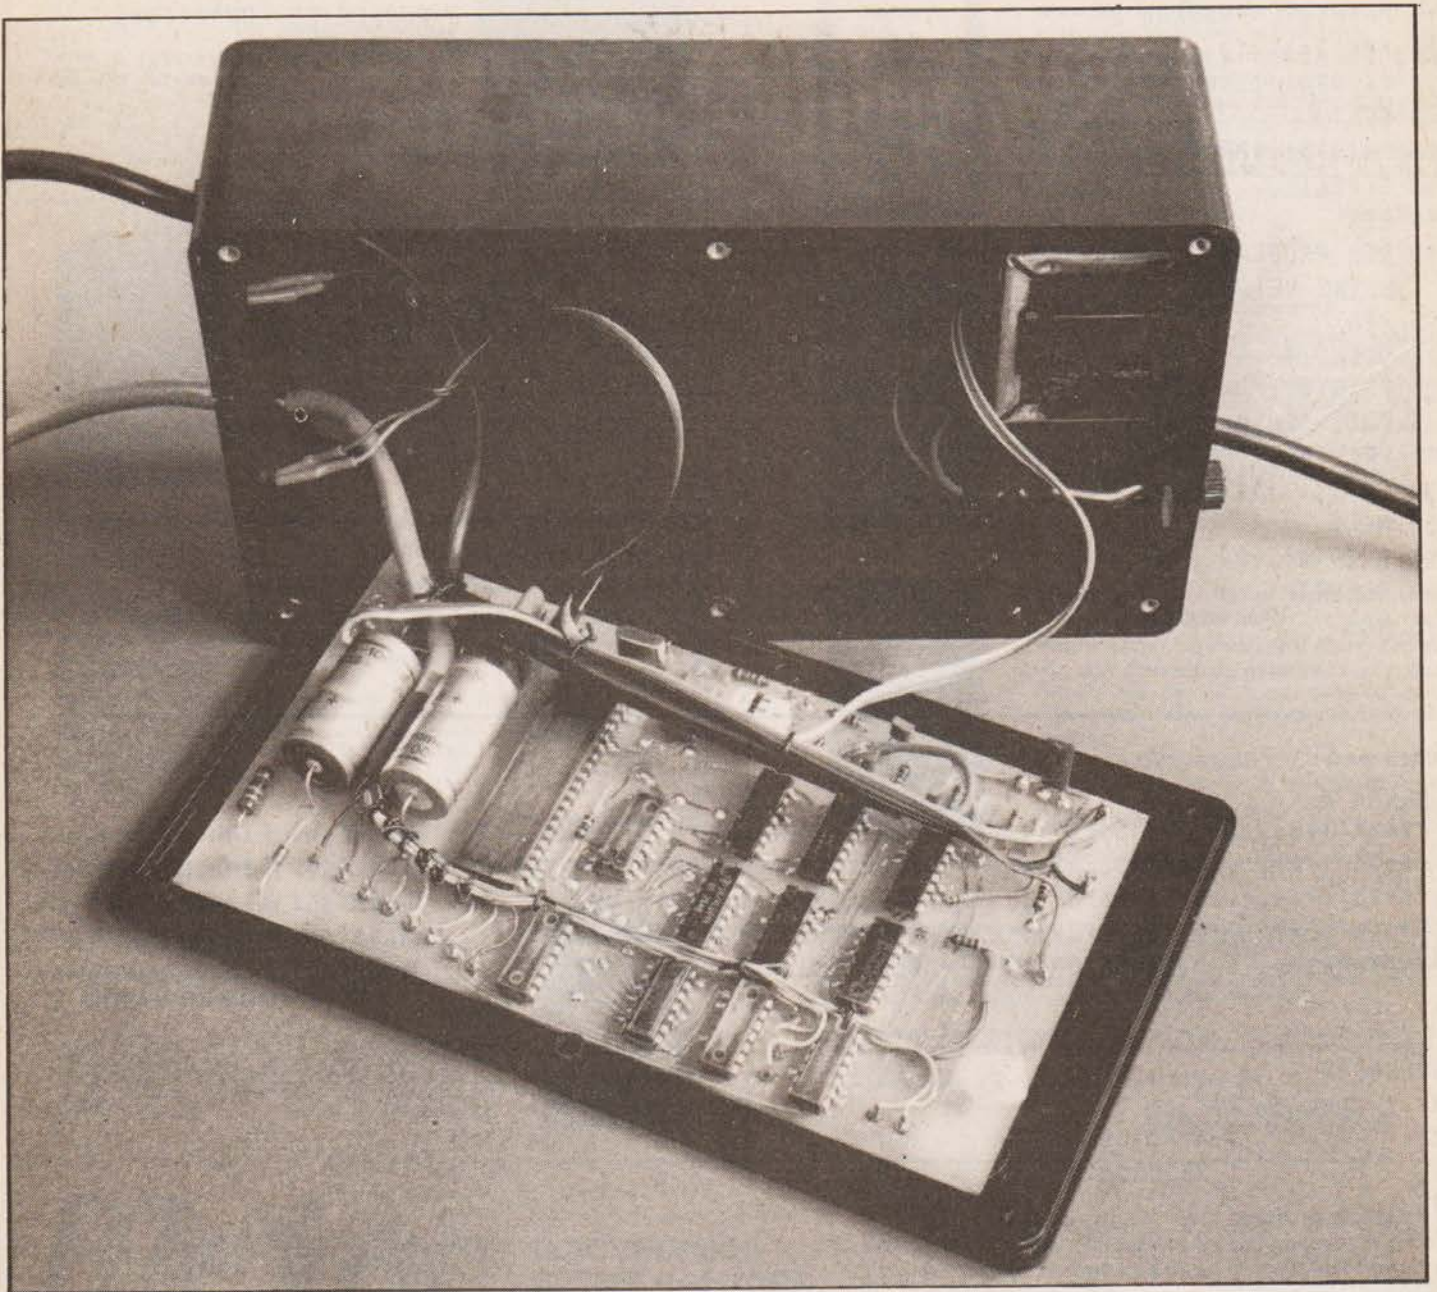

Summary

The adaptor fulfils all the requirements for the home and small business user. Without one it would not be readily possible to connect a printer to the PET. The Connecticut Word Processor program mentioned in our survey last month will work through this adaptor, but the supplied listing modifications will have to be inserted.

The unit costs £106 against £90 for the Petsoft unit.

The 3D unit is slightly neater in design and much easier to change Baud rates on, but apart from that they both perform exactly the same job.

As well as this RS232 adaptor 3D have a range of other PET peripherals including A to D converters and XY plotter interfaces and with luck we will be able to test some of these out at a latter date. 3D live at 43 Grafton Way, London W1P 5LA which is also the home of the London Computer Store.

```
10 REM PROGRAM A PRINTER TEST
14 OPEN1,4
15 PRINT#1,"PROGRAM A"
18 FORJ=1TO5
20 FORI=32TO126
40 PRINT#1,CHR$(I);:NEXTI
50 PRINT#1,:REM NEW LINE
60 NEXTJ
65 PRINT#1,:PRINT#1,
70 CLOSE1
95 REM
100 REM PROGRAM B FORMATTED OUTPUT WITHOUT
    CORRECTION
105 REM
110 OPEN1,4
```


PET PORT II

```

115 PRINT#1,"PROGRAM B"
120 FOR I=1TO10
130 PRINT#1,I,SQR(I),I^2
140 NEXT
145 PRINT#1,:PRINT#1,
150 CLOSE1
195 REM
200 REM PROGRAM C CORRECTED FORMATTING
    USING RETURNS
205 REM
210 OPEN1,4
220 PRINT#1,"PROGRAM C"
230 FORI=1TO10
240 PRINT#1,I;CHR$(13)TAB(25)SQR(I);
    CHR$(13)TAB(50)I^2
250 NEXT
255 PRINT#1,:PRINT#1,
260 CLOSE1
295 REM

```

```

300 REM PROGRAM D CORRECTED FORMATTING
    USING LEN FUNCTIONS
305 REM
310 OPEN1,4
320 PRINT#1,"PROGRAM D"
330 FORI=1TO10
340 PRINT#1,ITAB(25-LEN(STR$(I)))SQR(I)
    TAB(25-LEN(STR$(SQR(I))))I^2
350 NEXT
355 PRINT#1,:PRINT#1,
360 CLOSE1
395 REM
400 REMPROGRAM E PRINTING ALTERNATELY ON
    PRINTER AND PET SCREEN
405 REM
420 OPEN1,4:OPEN 2,3
430 PRINT#1, "PROGRAM E PRINTER"
440 PRINT#2,"PROGRAM E SCREEN"
450 CLOSE1:CLOSE2

```

PROGRAM A

```

!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMN
OPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMN
OPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMN
OPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMN
OPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMN
OPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz

```

PROGRAM B

1	1	1	
2	1.41421356		4
3	1.73205081		9
4	2	16	
5	2.23606798		25
6	2.44948974		36
7	2.64575131		49.0000001
8	2.82842713		64
9	3	81.0000001	
10	3.16227766		100

PROGRAM C

1	1	1
2	1.41421356	4
3	1.73205081	9
4	2	16
5	2.23606798	25
6	2.44948974	36
7	2.64575131	49.0000001
8	2.82842713	64
9	3	81.0000001
10	3.16227766	100

Some Common BASIC Programs

76 short practical programs, most of which can be used on any microcomputer with any version of BASIC. Complete with program descriptions, listings, remarks and examples.

(200 pages)

B1

Price £6.00



PROGRAMMING FOR LOGIC DESIGN

- C 8080 Programming for Logic Design
- D 8800 Programming For Logic Design
- E Z80 Programming For Logic Design

These books describe the meeting ground of programmers and logic designers; written for both, they provide detailed examples to illustrate effective usage of microprocessors in traditional digital applications.

B2/C/D/E

(300 pages each)



PROGRAM BOOKS WRITTEN IN BASIC

- F Payroll With Cost Accounting (400 pages)
- G Accounts Payable And Accounts Receivable
- H General Ledger

These books may be used independently, or implemented together as a complete accounting system. Each contains program listings, user's manual and thorough documentation. Written in an extended version of BASIC.

B3/F/G/H



ASSEMBLY LANGUAGE PROGRAMMING

- J 8080A/8085 Assembly Language Programming
- K 8800 Assembly Language Programming

These books describe how to program a microcomputer using assembly language. They discuss classical programming techniques, and contain simplified programming examples relevant to today's microcomputer applications.

B4/J/K

(400 pages each)



AN INTRODUCTION TO MICROCOMPUTERS

Volume 0 — The Beginner's Book

If you know nothing about computers, then this is the book for you. It introduces computer logic and terminology in language a beginner can understand. Computer software, hardware and component parts are described, and simple explanations are given for how they work. Text is supplemented with creative illustrations and numerous photographs. Volume 0 prepares the novice for Volume 1.

B5

(300 pages)

Price £5.65



Volume 1 — Basic Concepts

This best selling text describes hardware and programming concepts common to all microprocessors. These concepts are explained clearly and thoroughly, beginning at an elementary level. Worldwide, Volume 1 has a greater yearly sales volume than any other computer text.

B6

(350 pages)

Price £6.00



Volume II — Some Real Products (revised June 1977)

Every common microprocessor and all support devices are described. Only data sheets are copied from manufacturers. Major chip slice products are also discussed.

B7

(1250 pages)

Price £18.95
without binder
£24.40
with binder B4



HOW TO ORDER

Payment can be made by sending cheque, postal order, Barclay, Access or American Express card numbers. Write your name, address and the order details clearly, enclose 30p for post and packing or the amount stated. We do not wait to clear your cheque before sending the goods so this will not delay delivery. All products carry 1 year guarantee and full money back 10 day reassurance. All prices include VAT.

Trade enquiries: Send for a complete list of trade prices — minimum order value £100. Telephone Orders: Credit card customers can telephone orders direct to Daventry or Edgware Road.

24 hour phone service at both shops: 01-723 4753 03272-76545.

CALLERS WELCOME
Shops open 9.30 — 6.00.

Metrac

ELECTRONICS & TIME CENTRES

North & Midlands
67 High Street, DAVENTRY
Northamptonshire
Telephone: 03272 76545

South of England
327 Edgware Road
LONDON W.2
Telephone: (01) 723 4753

**NASCOM 1
KIT or BUILT**

**SUPERBOARD II
ON DEMO NOW**

**2K BASIC FOR
STANDARD NASCOM 1**

**ELECTRONIC
MASTERMIND**

NEW



Play 9 Mastermind games against the computer or set your own secret code 3, 4 or 5 digits.

£14.90

Free mini Mastermind with each order



N.I.C. MODELS

**CHESSE CHAMPION
6-Level Chess Computer**

£89.50 with mains adaptor

STAR CHESSE T/V GAME

in colour.
A Spage Age chess game

£59.50 with mains adaptor

**CHROMA-CHIME
24 Tune door chimes**

£9.95 built **£14.95**

kit **TRS 80** — 100 Programs on Tape

£46.50 SAE with all enquiries

NEW

NEW

Please mention CT when contacting advertisers

Dear Computing Today,

It was nice to see, at last, someone printing a program for NASCOM users. And the information on getting the Monitor to load during a program works rather well. But.....

It would have been rather good if the listing had been in Z80 Assembly mnemonics, and correct. It took me ages to sort out, and I eventually gave up and wrote a better program. So there!

Examples so that you know I'm not bull-6502-ing. Line 0F65, 10 FB is DJNZ -3 which doesn't get you to Line 1.

Line 0F79, 10 ED is not JR NZ, it's DJNZ.

I'd bet my version against an 8K RAM board that it wasn't assembled on a NASCOM.

To change the subject, the magazine I like but what happened to the review of NASCOM add-ons? I know, they haven't been delivered, which is absolutely typical.

People who deliver:—

Microdigital (Superb service)

People who don't:—

NASCOM, Science of Cambridge, Comp Computer Components.

If you ordered from the last two you are going to have to wait until we get ours.

Yours mnemonically,
Chris Blackmore.

31 Herne Rise,
Ilminster,
Somerset TA19 0HH

Dear Sir,

While not wishing to be too critical I feel that I must agree with the letter from Mr Anderson in your April issue. The photographs you use are often of very poor quality, in fact there is a case in point directly above his letter on page 22. Those accompanying the WCE show report were little better, the picture at the top of page 60 looking as though it's been double exposed on an out-of-focus instamatic.

I do have one other criticism. That is concerning the quality of grammar and spelling in some of the articles. I can see many of the same faults in your 'parent' magazine, ETI.

As for the bias towards TRITON, this is undeniable but then every computer magazine has its favourite systems.

I also concur with Mr Anderson on the BASIC feature and his comments on Donald Alcock's splendid little book. It has all been done before. It should be the job of a magazine to lead rather than follow.

I hope that you don't consider the above comments too destructive. I look forward to seeing CT improve with age—a healthy computer press is important in increasing awareness and stimulating interest in the field.

Yours sincerely,
D.Burns

11 Turpins Chase,
Oaklands,
Welwyn,
Hertfordshire.

Dear Sir,

I am very grateful for all the correspondence, and pleased to see that a NASCOM program was long awaited by many of your readers. I regret that three typographical errors occurred, although many of you found them for yourselves. The corrections are as follows:—

Address 0DDC should read 0B and not 0A,

Address 0EE8 should read 00 and not FA,

Address 0F6D should read 1E and not 13.

Whilst one or two mnemonics were misprinted these are too trivial to be of consequence. Whilst every attempt is made to ensure an accurate listing it is not humanly possible to guarantee perfection, and the user must be prepared to do some debugging. For those of you that met with success I hope you find it useful.

One or two people have been perturbed by not automating their cassettes. For them I suggest loading the program and registers each time from their cassette and executing from 0C77. This will bypass the auto load facility.

For the benefit of Mr Blackmore, who I hope is sending me his program, the design of 'Ledger' was carried out and is being currently used on my NASCOM.

Yours faithfully,
M.J.Bell T.Eng (CEI) MITE.

Dear Sir,

With reference to the 25120 WOM chips (Data Sheet, April Issue) I have great pleasure in informing you that they fulfil admirably my requirements for a three cycle confabulator.

I am at present designing a Mark II of ERIS, Electronic Reality Identification Shifter, which will utilise reverse-biased pseudo-Rabbit E.D. with Zen diodes linked via involatile CPT-symmetric lepton shunts functioning as 'pseudo-neurons'. This will enable data for the confabulator to be WOMed into the cerebronic parts of the circuit without Deere-Lyza bucket loss occurring.

A few problems though:—

1) The SEX process. Several of the chips purchased were found to have a considerably deviant bias, necessitating much use of M to M connectors and a twisted pair or two.

2) The non hermetic sealing. Since ERIS needs completely immutable environs, I have searched far and wide for a Seal of Hermes. Will Solomons Seal, which grows nearby, do instead?

3) The cooling problem. I have had no end of problem in finding a six foot fan, so being a do-it-oneself type, I persuaded a friend to crochet me one in Raffia. This is unsatisfactory as either,

a) his arms become EXTREMELY tired, giving functional periods of less than five seconds before burn out, or
b) he becomes confabulated by the local field (½" is a bit near!!) and thrashes the setup with the fan.

Yours faithfully,
Magenta Screens (Ms)

56 Frederick Street,
Loughborough,
Leics. LE11 3BJ

Mr. Ron Harris
Acting Editor
Computing Today
25-27 Oxford St.
London W1R 1RF

Dear Mr Harris,

I read with interest the article on Word Processors in the recent May issue. In my company we have two TRS-80 Systems, one of which has been slightly modified to run the word processing package on which this letter was produced.

This is NOT the package apparently supplied by A.J. Harding and I can only express surprise that your article should give the impression that his package is the only one available for the TRS-80. Our package is the 'Electric Pencil' produced by Micheal Shrayner Software and distributed in the U.K. by a number of TRS-80 specialists.

The 'Electric Pencil' is available for both the cassette tape and disc systems at a cost of around £100 which includes both software and a keyboard modification to produce lower case.

The system provides a screen orientated input and editing process. Files may be saved, loaded or merged. There are also facilities for:-

- screen scrolling forwards/backwards at variable speeds.
- simple search or search with replace.
- text block moves/deletes
- line insert/delete
- automatic heading with page numbering
- left and right justification
- line length control
- variable print speeds e.g. 300 or 1200 Baud

In terms of capacity we have found that the system can handle between 20 to 30 pages of A4 text.

The system is almost bug free and the documentation is beyond complaint. In fact it is necessary to look at very up market system before any real limitations appear e.g.:-

- No true proportional output
- No centering or multiple column facilities (not really a limitation with a screen orientated system)

Your sincerely

Derrick Rowe

109 King Charles Rd.
Surrey
May 9th 1979

Minefield Game

The program that follows was designed specifically for the Commodore PET computer. It uses less than 3K bytes of memory for storage and execution but produces a very effective and compelling game. The object is to save two "victims" from a minefield. However, the mines increase in number each time you move and you must watch where you are moving or else you will be blown up!! There is a time limit of one minute (this can easily be changed) at the end of which you will be destroyed unless you have rescued both victims.

```

1  PRINT "  DO YOU WANT THE RULES (Y OR N)"
2  INPUT Q$: IF Q$ = "Y" THEN 2000
3  PRINT "  SET NO. OF MINES PER MOVE (10-30)
4  INPUT V:PRINT "  "
5  IF V > 30 THEN 3
6  IF V < 10 THEN 3
7  FF=INT (RND(1)*999.9)+32768
8  JJ=INT(RND(1)*999.9)+32768
9  POKE FF,87;POKE JJ,87
10 F=33268
12 POKE F,81
13 X=102
14 LET TIME $ = "000000"
16 FOR H=1 TO V
17 D=INT(RND(1)*999.9)+32768
18 IF D=FF THEN 17
20 IF D=JJ THEN 17
24 IF PEEK(D)=X THEN 17
26 IF D=F THEN 17
28 POKE D,X
30 NEXT H
40 IF TIME $ 7 "000/00" THEN 200
50 GET C$:IF C$=""THEN 50
51 IF C$="I" THEN 520
52 IF C$="2" THEN 530
53 IF C$="3" THEN 540
54 IF C$="4" THEN 550
56 IF C$="6" THEN 560
57 IF C$="7" THEN 570
58 IF C$="8" THEN 580
59 IF C$="9" THEN 590
60 IF C$="R" THEN 505
100 GOTO 50
200 PRINT "SORRY YOU HAVE RUN OUT OF TIME"

200 PRINT "SORRY YOU HAVE RUN OUT OF TIME"
499 FOR BB=1 TO 400:NEXT BB
500 POKE F,42:POKE F+I,64:POKE F-I,64
501 POKE F-40,66:POKE F+40,66
502 POKE F-41,77:POKE F-39,78:POKE F+39,78
503 POKE F+41,77
504 FORK BB=1 to 2000:NEXT BB
505 PRINT "  ANOTHER GAME(Y OR N)?"
506 GET P$:IF P$="" THEN 506
508 IF P$="Y" THEN 3
509 IF P$="N" THEN 515
510 GOTO 506
515 STOP
520 A=39
525 GOTO 620
530 A= 40
535 GOTO 620
540 A= 41
545 GOTO 620
550 A= -1
555 GOTO 620
560 A= +1
565 GOTO 620
570 A= -41
575 GOTO 620
580 A= -40
585 GOTO 620
590 A= -39
620 POKE F,46
621 F=F+A
622 IF PEEK(F)=X THEN 499
623 POKE F,81
624 IF PEEK(FF)<>87 THEN 626
625 GOTO 16
626 IF PEEK (JJ)<>87 THEN 1000
628 GOTO 16
1000 IF TIME$>"000100" THEN 200
1004 PRINT "  CONGRATULATIONS YOU HAVE "
1010 PRINT "  SAVED THE VICTIMS FROM THE "
1015 PRINT "  MINEFIELD WITHOUT GETTING "
1020 PRINT "  KILLED. WOULD YOU LIKE TO "
1025 PRINT "  TRY AGAIN(Y OR N)? "
1030 GET YS:IF YS="" THEN 1030
1040 IF YS="Y" THEN 3
1044 IF YS="N" THEN 1050

```


SOFTSPOT

```

1048 GOTO 1030
1050 STOP
2000 PRINT " YOU ARE THE '●' SYMBOL
      IN THE "
2004 PRINT " MIDDLE OF THE SCREEN.
      YOU MUST "
2008 PRINT " TRY AND REACH THE 2 '0'
      SYMBOLS "
2010 PRINT " AND MOVE OVER THEM TO
      PROTECT THEM "
2012 PRINT " BUT WATCH OUT FOR THE MINES, "
2014 PRINT " THEY WILL DESTROY YOU IF YOU "
2016 PRINT " MOVE INTO THEM. YOU MAY
      MOVE "
2018 PRINT " YOURSELF USING KEYS 1-9. "
2020 PRINT " THERE IS A TIME LIMIT OF "
2022 PRINT " 1 MINUTE. PUSH R TO START "
2024 PRINT " AND STOP. GOOD LUCK!! "
2030 GET M$:IF M$ = ""THEN 2030
2040 IF M$ = "R" THEN 3
2050 GOTO 2030
    
```

WHICH BRITISH SYSTEM CAN OFFER THE FOLLOWING:

- | | |
|------------|--|
| ★ COLOUR | — Aerial Input, Alphanumerics and Graphics |
| ★ CEEFAX | — BBC Television Teletext service |
| ★ ORACLE | — IBA Television Teletext service |
| ★ BASIC | — ROM — Resident Interpreter |
| ★ MONITOR | — Motorola 6800 Machine Code |
| ★ VIEWDATA | — Instant Information service |

TECS:

**TECHNALOGICS
EXPANABLE
COMPUTER
SYSTEM**

Prices start at
around £360



Rack Mounting and Tabletop Versions (illustrated).
The logical development everyone has been waiting for.
Please send large sae for details to:

TECHNALOGICS (DEPT. CT)

8 EGERTON STREET, LIVERPOOL
L8 7LY

PETALECT

ELECTRONIC SERVICING LTD.

WANTED

Good Homes for Intelligent Pets
THE

PET 2001/8 Computer

£550 plus VAT



This unbelievably versatile, compact, portable and self-contained unit has many varied applications and offers tremendous benefits in the worlds of

● BUSINESS and COMMERCE:

Can be used efficiently for Trend Analysis · Stock Control · Payroll · Invoicing · Inventory Control, etc.

● SCIENCE and INDUSTRY:

The 'PET' has a comprehensive set of scientific functions useful to scientists, engineers and industry.

● EDUCATION:

An ideal tool for teaching and it can be used to keep records, exam results, attendance figures, etc.

● ENTERTAINMENT:

Games including Backgammon, Noughts and Crosses, Pontoon, Black Jack and Moon Landing

PET COMPATIBLE DUAL FLOPPY DISC NOW AVAILABLE

NEW PETS NOW IN STOCK

We have six years' experience in servicing electronic calculators, mini-computers in S.E. England. 24-hour service contract available at £69.50 per annum. Credit and leasing terms available.

For full details and demonstration
contact Peter Watts . . . Now!

PETALECT

ELECTRONIC SERVICING LTD

(Authorised Commodore Pet Dealer) Specialists in
Electronic Servicing, Programming, Electronic Design
and Prototype Manufacture

33 PORTUGAL ROAD, WOKING,
SURREY GU21 5JE.

Tel: Woking (04862) 69032/68497

computing today

technical book service

What Is A Microprocessor ?

2 Cassette tapes plus a 72 page book deal with many aspects of microprocessors including Binary and Hexadecimal counting, Programming etc. **£10.75.**

NEW:

Adams, C. BEGINNERS GUIDE TO COMPUTERS AND MICROPROCESSORS WITH PROJECTS **£5.60**

Understanding building programming and operating your own microcomputer.

NEW:

Albrecht, B. BASIC FOR HOME COMPUTERS. A self teaching guide **£4.75**

Shows you how to read, write and understand basic programming language used in the new personal size microcomputers.

Albrecht B. BASIC. A self teaching guide (2nd edition) **£4.50**

Teach yourself the programming language BASIC. You will learn how to use the computer as a tool in home or office and you will need no special maths or science background.

Alcock, D. ILLUSTRATING BASIC **£2.60**

This book presents a popular and widely available language called BASIC, and explains how to write simple programs.

Altman, I. MICROPROCESSORS **£10.65**

Gives a general overview of the technology design ideas and explains practical applications.

Altman, L. APPLYING MICROPROCESSORS **£12.00**

Follow volume which takes you into the second and third generation devices.

Aspinall, D. INTRO TO MICROPROCESSORS **£6.40**

Explains the characteristics of the component.

NEW:

Barden, W. Z-80 MICROCOMPUTER HANDBOOK **£7.65**

Barden, W. HOW TO BUY AND USE MINI-COMPUTERS AND MICROCOMPUTERS **£7.75**

Discusses these smaller computers and shows how they can be used in a variety of practical and recreational tasks in the home or business.

Barden, W. HOW TO PROGRAM MICRO-COMPUTERS **£7.00**

This book explains assembly language programming of microcomputers based on the Intel 8080, Motorola MC6800 and MOS Technology MCS6502 microprocessor.

Barna, A. INTRODUCTION TO MICRO-COMPUTERS AND MICROPROCESSORS **£7.50**

Provides the basic knowledge required to understand microprocessor systems. Presents a fundamental discussion of many topics in both hardware and software.

Bibbero, R. J. MICROPROCESSORS IN INSTRUMENTS AND CONTROL **£12.45**

Introduces the background elements, paying particular regard to the dynamics and computational instrumentation required to accomplish real-time data processing tasks.

Lancaster, D. TV TYPEWRITER COOK-BOOK **£7.75**

An in-depth coverage of tv typewriters (tv's) the only truly low cost microcomputer and small display interface.

Lancaster, D. CHEAP VIDEO COOK-BOOK **£6.50**

Lesea, A. MICROPROCESSOR INTERFACING TECHNIQUES **£7.50**

NEW:

Leventhal. INTRO TO MICROPROCESSORS **£16.70**

NEW:

Lewis, T. G. MIND APPLIANCE HOME COMPUTER APPLICATIONS **£4.75**

NEW:

Libes, S. SMALL COMPUTER SYSTEMS HANDBOOK **£5.75**

The Primer written for those new to the field of personal home computers.

NEW:

Lippiatt. ARCHITECTURE OF SMALL COMPUTER SYSTEMS **£4.35**

NEW:

Moody, R. FIRST BOOK OF MICRO-COMPUTERS **£3.85**

(the home computer owners best friend).

McGlynn, D. R. MICROPROCESSORS — Technology, Architecture & Applications **£8.40**

This introduction to the 'computer-on-a-chip' provides a clear explanation of the important new device.

McMurrin, PROGRAMMING MICRO-PROCESSORS **£5.50**

A practical programming guide that includes architecture, arithmetic/logic operations, fixed and floating point computations, data exchange with peripheral devices computers and other programming aids.

NEW:

Nagin, P. BASIC WITH STYLE **£4.00**

Programming Proverbs. Principles of good programming with numerous examples to improve programming style and producing.

NEW:

Ogden SOFTWARE DESIGN FOR MICRO-COMPUTERS **£7.00**

NEW:

Ogden. MICROCOMPUTER DESIGN **£7.05**

Peatman, J. B. MICROCOMPUTER BASED DESIGN **£19.00**

This book is intended for undergraduate courses on microprocessors.

NEW:

Bursky, D. MICROCOMPUTER BOARD DATA MANUAL £5.40

Bursky, D. MICROPROCESSOR DATA £5.40

Includes complete description of the processor. Support circuits, Architecture, Software, etc.

Coan, J. S. BASIC BASIC £7.50

An introduction to computer programming in BASIC language.

Coan, J. S. ADVANCED BASIC £7.30

Applications and problems.

NEW:

Duncan. MICROPROCESSOR SOFTWARE ENGINEERING £13.50

NEW:

Freiberger, S. CONSUMERS GUIDE TO PERSONAL COMPUTING AND MICROCOMPUTERS £5.50

NEW:

Frenzel, L. GETTING ACQUAINTED WITH MICROPROCESSORS £7.10

This is an invaluable book for those who want to know more about hobby and personal computing.

Gilmore, C. M. BEGINNERS GUIDE TO MICROPROCESSORS £4.75

Gosling, R. E. BEGINNING BASIC £3.25
Introduces BASIC to first time users.

Graham, N. MICROPROCESSOR PROGRAMMING FOR COMPUTER HOBBYISTS £7.00

Haviland, N. P. THE COMPULATOR BOOK £6.20

Building super calculators and minicomputer hardware with calculator chips.

Heiserman, D. L. MINIPROCESSORS FROM CALCULATORS TO COMPUTERS £4.85

Hilburn, J. L. MICROCOMPUTERS, MICROPROCESSORS, HARDWARE, SOFTWARE AND APPLICATIONS £16.95

Complete and practical introduction to the design, programming operation, uses and maintenance of modern microprocessors, their integrated circuits and other components.

Klingman, E. MICROPROCESSOR SYSTEMS DESIGN £16.95

Outstanding for its information on real microprocessors, this text is both an introduction and a detailed information source treating over a dozen processors, including new third generation devices. No prior knowledge of microprocessors or microelectronics is required for the reader.

Kemeny, J. G. BASIC PROGRAMMING £6.10

A basic text.

Korn, G. A. MICROPROCESSOR AND SMALL DIGITAL COMPUTER SYSTEMS FOR ENGINEERS AND SCIENTISTS £19.00

This book covers the types, languages, design software and applications of microprocessors.

Rao, G. U. MICROPROCESSOR AND MICROPROCESSOR SYSTEMS £20.50

A completely up-to-date report on the state-of-the-art of microprocessors and microcomputers written by one of the leading experts.

Rony, P. H. THE 8080A BUGBOOK: Microcomputer Interfacing & Programming £8.15

The principles, concepts and applications of an 8-bit microcomputer based on the 8080 microprocessor IU chip. The emphasis is on a computer as a controller.

Scelbi. 6800 SOFTWARE GOURMET GUIDE AND COOKBOOK £7.80

Scelbi. 8080 SOFTWARE GOURMET GUIDE AND COOKBOOK £7.80

Scelbi. UNDERSTANDING MICROCOMPUTERS £7.60

Gives the fundamental concepts of virtually all microcomputers.

NEW:

Schoman, K. THE BASIC WORKBOOK £3.70

Creative techniques for beginning programmers.

NEW:

Sirion, D. BASIC FROM THE GROUND UP £6.00

Soucek, B. MICROPROCESSORS AND MICROCOMPUTERS £18.80

Here is a description of the applications programming and interfacing techniques common to all microprocessors.

NEW:

Spracklen, D. SARGON £9.75
A computer chess program in Z-80 assembly language.

NEW:

Tracton. 57 PRACTICAL PROGRAMS & GAMES IN BASIC £6.40

Programs for everything from Space war games to Blackjack.

Waite. M. MICROCOMPUTER PRIMER £6.25

Introduces the beginner to the basic principles of the microcomputer.

Ward. MICROPROCESSOR / MICROPROGRAMMING HANDBOOK £6.00

Authoritative practical guide to microprocessor construction programming and applications.

NEW:

Veronis. MICROPROCESSOR £12.85

Zaks, R. INTRODUCTION TO PERSONAL AND BUSINESS COMPUTING £7.50

Zaks, R. MICROPROCESSORS FROM CHIPS TO SYSTEMS £7.50

Note that all prices include postage and packing. Please make cheques, etc, payable to Computing Today Book Service (Payment in U.K. currency only please) and send to:
Computing Today Book Service,
P.O. Box 79,
Maidenhead, Berks.

A survey of the electronic games that are available on the market

Last month we presented a survey of microcomputers. This month we decided to turn our attention to electronic games. It was a good excuse to get a few games in and play with them for a while.

However, as the games began to take over the office, we wondered who was the boss. Didn't somebody once say, 'Whom the Gods would destroy they first give electronic games?' Well, it was something like that!

We looked mainly at microprocessor-based, hand-held games and board games. It seems that if you want to play draughts or chess, break codes or blast flying saucers out of existence, there's a game to do it.

A north London electronics firm is even marketing a




Lil Genius

If your maths is a little rusty, Lil Genius may be able to help you out. Together with the short manual provided, Lil Genius is designed to help teach the rudiments of arithmetic to children of five and above.

Having entered what you believe to be the correct answer to a calculation, you can ask Lil Genius if you are correct by pressing three keys in turn. If you're wrong, a freckle-faced bespectacled youngster adorning the front panel winks a nasty case of red eye (for our optician readers) at you and a bleeper sounds. In other words a red LED flashes on and off if you're wrong.

If you manage to get your sums right, the freckly-face winks a green eye at you... but no bleeping, no sound at all. Frankly, we found it more entertaining to lose.

Lil Genius will cross the counter at a very reasonable £6.45.

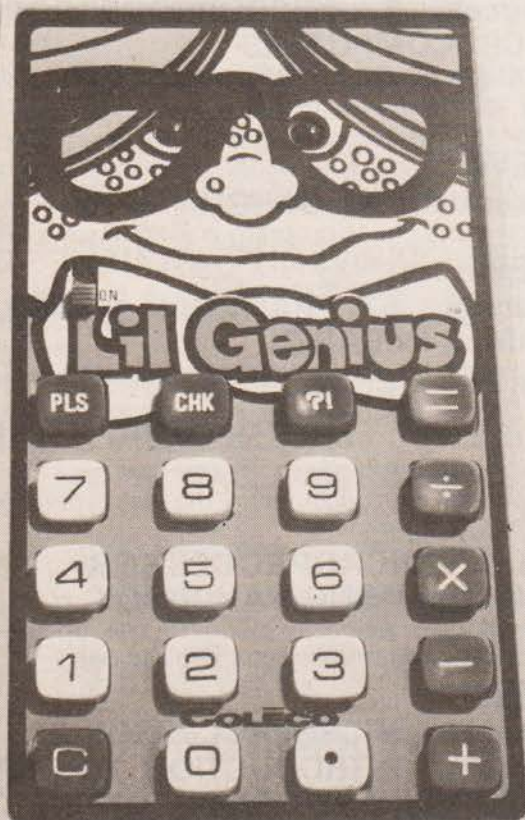


Checker

Looking very similar to Chess Challenger, Checker Challenger 4 is an attractively presented, four level, microprocessor-based draughts game.

Looking Ahead

On the first level of play, for beginners and children, the challenger looks ahead one offensive and one defensive move. On level 2, the challenger looks two moves ahead, and so on up to level 4, for 'experts and true aficionados', when you have to contend with four offensive and

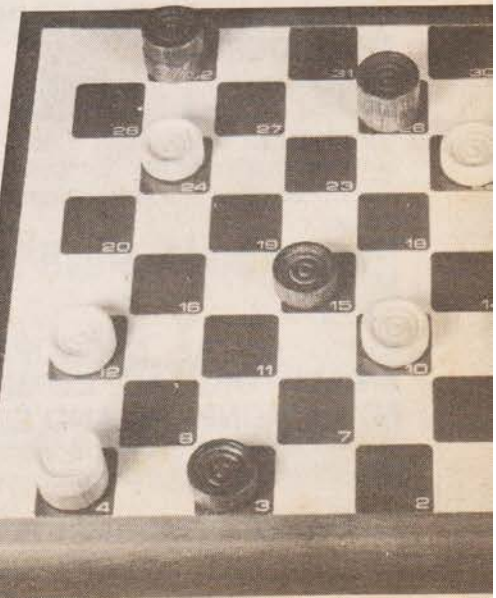

GAMES SURVEY



baseball game. If you want to play soccer in your hand, however, you'll have to go to Aberdeen. No, not the well-known jumping off point for the nearest oil rig. This particular box of tricks hails from Aberdeen, Hong Kong. We were particularly interested to see a new range of hand-held computer games from America, introduced to this country by Spectrum Marketing. Most are appearing on the British market now and others will do so within the next month or two.

Predictably we found that, in some cases, well used sound effects could turn the boring process of button pushing into an entertaining game. The undoubted winner of our Golden Digit award for the game with the mostest is UFO Master Blaster, which must be set to be a best seller in the next year. Although a little pricey for one game at £21.95, we feel that it is worth every penny of it. At times there was a queue in the office, of people wanting to play with it next and certain members of staff were found guilty of queue-jumping. Well, we're all kids at heart, aren't we?

Digits

Although the name Digits may not be familiar to you, the game certainly will be. The cunning little devil thinks up a four digit code and you have to crack it. You are given clues to tell you how close you are to the right answer. You are told how many digits you have correct and in the right position and correct but in the wrong position.

This was the only game from Spectrum where we found it advisable to read the instruction booklet on, before launching into a game. During one game we found that some digits would not appear on the display when their buttons were pressed. A broken game? A swift scan of the instruction booklet revealed that only digits of five or less make up the code on the lowest of the two skill levels. If you dare switch to level two, you'll have to cope with the mind-boggling choice of 0 to 9. Fun, while the novelty lasts. Digits is expected to retail at £13.95.



Challenger


defensive moves ahead. However, on level four excessive response times tend to make games seem interminable.

Do Your Duty

If you try to cheat by choosing not to notice that you are obliged to take a piece, your electronic opponent refuses to accept your illegal move.

The game cannot proceed until you do your duty and capture a piece.

Checker Challenger 4, will set you back £99.95 and Checker Challenger 2 (a two level version), £59.95.

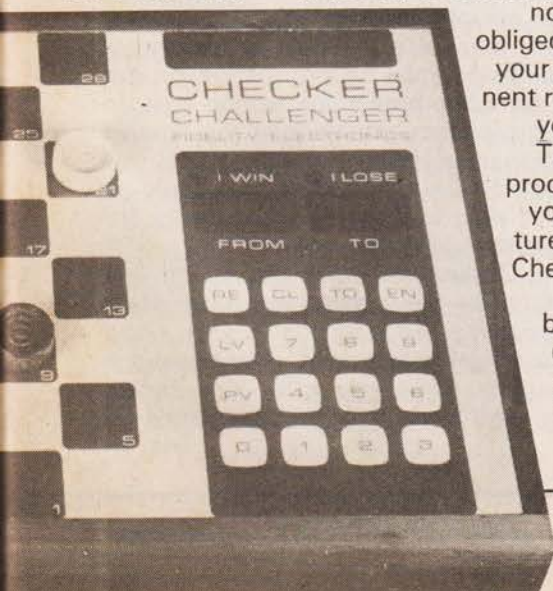

Star Chess



Star Chess is a remarkable new game from Videomaster. Plug it into the aerial socket of a domestic colour telly and you'll see a crystal clear, beautifully sharp, full colour chess board with a few very strange pieces on it.

As the name suggests, it has something to do with chess, so a basic knowledge of the game is a must. However, if you think this is just another TV chess game, you're completely wrong.


Each piece is moved by means of a cursor, controlled by four buttons on each of two hand controllers. Every movement is accompanied by bleeps and squeaks from the built-in sound unit. The pieces, with the exception of pawns, move as in chess. Pawns cannot take diagonally but they can move sideways and backwards.

Firepower

What puts this game in a class of it's own is the ability of pieces to fire missiles at each other. Yes, that's what I

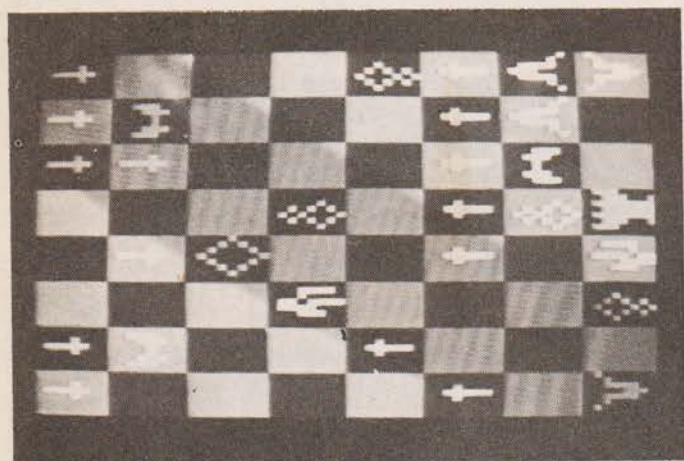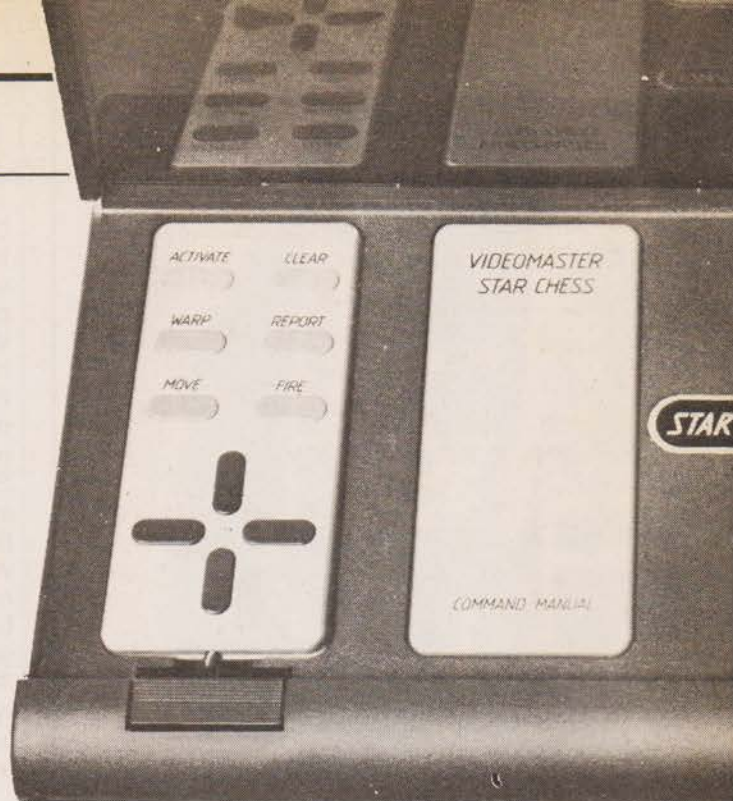

Master Mind

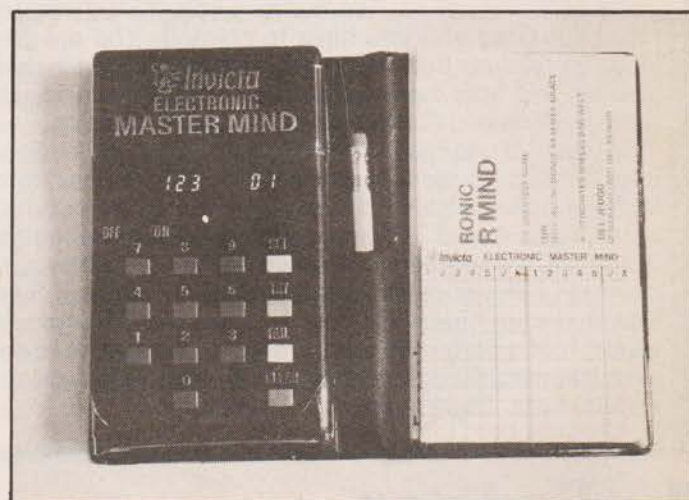

Zodiac


This first ever astrology computer is claimed by Spectrum to be 'the perfect answer for all those people who believe their lives are influenced by the stars.'

When used with the manual provided, the computer astrologer gives you three types of information. In the horoscope mode, a complete horoscope can be built up for anyone, including planetary positions at the time of birth and corresponding personality characteristics.

On daily preview, Zodiac will suggest what you should do from day to day, according to how the stars appear for that day — past, present and future.

In the advice mode, Zodiac will offer advice on any course of action entered by the worried star gazer. (Is it safe to feed the budgy today, I wonder?)

If your crystal ball has seen better days, why not put it out to grass and make some room for the Zodiac Astrology Computer, which you can get your hands on for around £25.95.

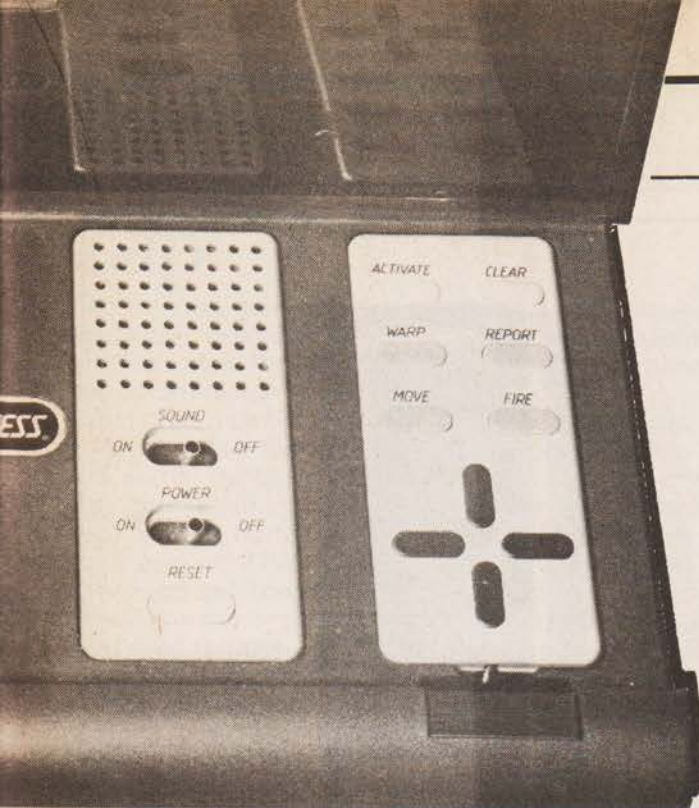

said, they can fire missiles at each other. If taking your opponent's piece endangers yours, then keep your distance and fire a missile at it instead. A hit is not guaranteed! However, if you do score a direct hit, you destroy some of your opponent's shields, which can number from two (pawn) to seven for the King and Queen. Ammunition is similarly limited.

Now, you won't believe this. How many times have you wished that you could forget about the rules of chess and move a piece to somewhere else on the board to get it out of trouble, or take it off the board completely for a while. You can do just that with this game. You can 'warp' a piece off the board. The drawback is that it can reappear anywhere, at any time. It can even land on top of one of your own pieces, which it then replaces. Your objective is to destroy your opponents King. Whilst it cannot be taken on it's own starbase (home square), it can be fired at.

This is undoubtedly the most absorbing TV game ever to darken our doorstep and it retails (the game, not the doorstep) at £59.95.


A familiar name for a familiar game. This is the electronic version of the well-known board game played with coloured pegs.

In this case the colour code is replaced by a four digit number. The display shows you if your attempt to break the code set by the machine has any correct digits in the wrong place, or correct digits in the right place. A tally sheet is also provided, so that you can keep a record of your unsuccessful attempts.

This game allows you to either play solo, or against another player, who can use the set function to give you a code to break. If you are getting nowhere and give up, you can see the code you were aiming for by pressing the FAIL button. If, however, you are successful, the game will display the number of attempts you made on the way to the correct solution.

We found a way of cheating this unit and your real opponent into thinking that you can break the toughest code first time, every time. See if you can work it out. Remember, you can see what the answer is by pushing the FAIL button.

Mastermind is made by Invicta.

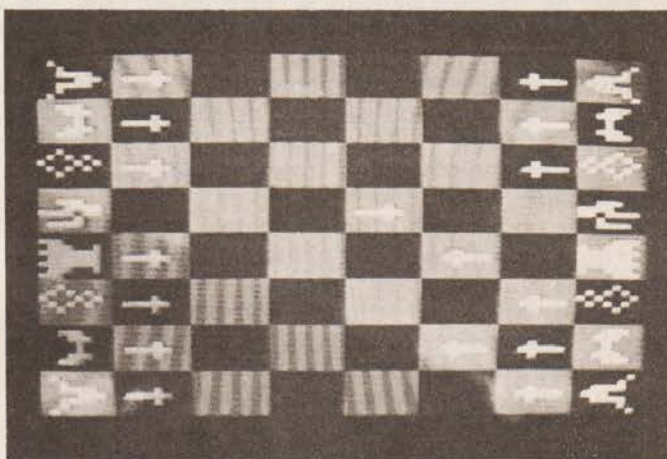

Simon

Simon, from Milton Bradley, is a game of memory, incorporating three variations and four skill levels, an electronic version of the 'Simon Says' game.

Raspberry

The idea is to repeat the ever-increasing random light flashes that Simon generates, creating a longer and longer sequence. On the highest skill level, can your memory stretch to a 31 lamp sequence? A wrong move illicit a disdainful raspberry from Simon.

TI Chip

The game is based on Texas Instruments' TMS1000 microprocessor. A set program is stored in ROM, while a RAM takes care of player-entered information.

Although already very successful in America, Simon was only recently launched on to the British market at a lavish party hosted by Elaine Stritch and Donald Sinden.

For this electronic application of a simple idea, you will have to pay around £29.00.



Master Blaster

This is undoubtedly the best of the new range from Spectrum, to the point of being addictive. We think it should be sold with a health warning.

The principle of the game is to kill or be killed. You live at one end of the display and, at random time intervals, you are attacked by flying saucers coming from the other end of the display. The attackers can fly along one of three tracks towards you and can switch between tracks in mid-attack. To complicate matters, two saucers can attack simultaneously, possibly changing flight paths on their way.

Your job is to blast them off the display in order to stay alive. To enable you to do just that with your single missile, you have two controls — a FIRE button, which is self-explanatory, and a three position, centre-biased switch with which to select your flight path.


As you knock off the opposition, you build up a score. The idea is to gain a total score of 99 to win. The length of the display is graduated from one, at your home base, to six at the far end. The number opposite to where you wipe out an enemy saucer is your score for the engagement. So, the further away from home the kill is, the more you get for it. It pays, therefore, to try to anticipate when the enemy will appear.

As your skill increases you can step up the speed of the game with a three position switch, from an easily manageable beginner's speed to an infuriating, almost impossible blur.

The game is complex, but not intricately so. You don't have to pour over a long book of instructions before you can play. It is attractively presented in an unusually shaped case, which fits naturally and comfortably into the hands, allowing easy access to the controls. There is also the added attraction of sound effects, without which the game might be merely so many flashing lights on the display.

Like a good book, this game is impossible to put down. The speed selection, saucers changing flight paths, the possibility of scoring more by anticipating attacks, sound effects and the randomness of attacks all go together to make this an immensely enjoyable game to play.

Priced at £21.95 the UFO Master Blaster is destined to be a winner.

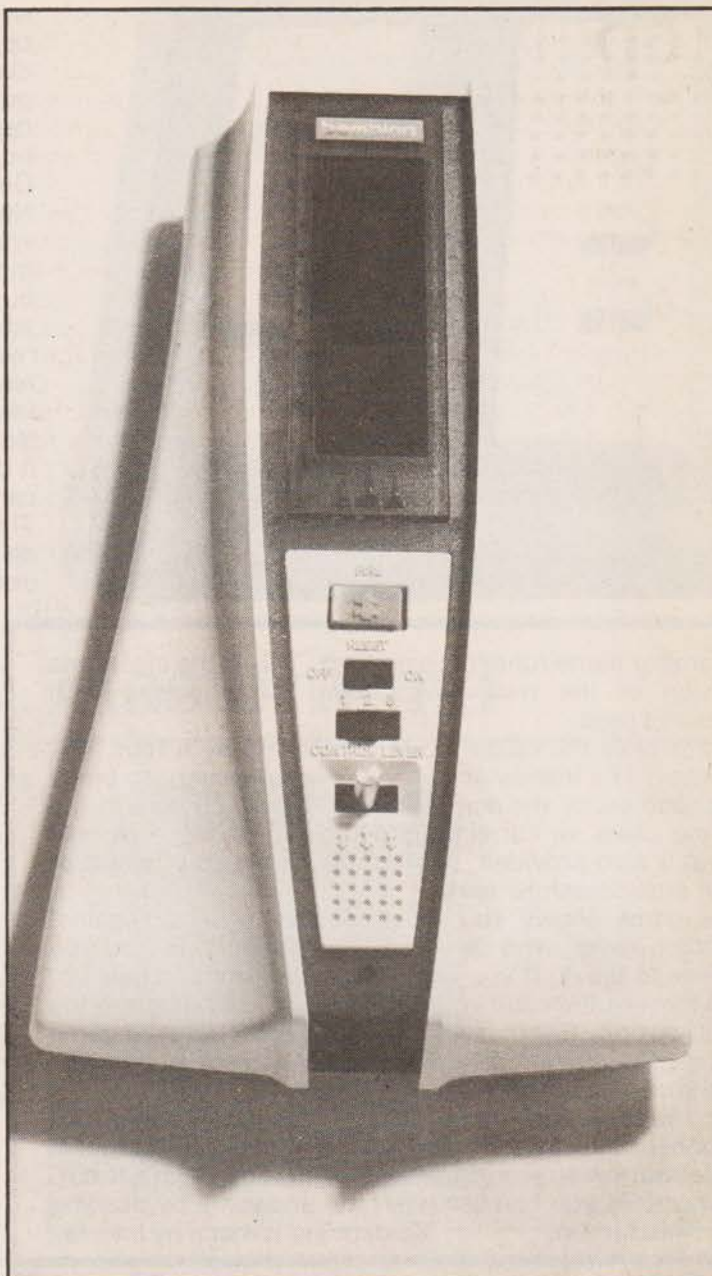

Amaze-A-Tron

This robust package boasts eight games in one. The Amaze-A-Tron maze game consists of a playing field keyboard on which players attempt to move from one point to another, both starting and finishing points being given by the unit at the outset, via a secret maze path. The path is traced out on keyboard squares numbered 1 to 25, with over a million maze path variations.

There are six two player (competitive) games and two solo games. When the unit is switched on, P1 (program 1) appears in a small display on the front panel. This is the game number. Anything from P1 through to P8 can be selected. A panel on the back of the game gives brief details of the eight games — a prudent insurance against instruction leaflet loss. The various games manage to incorporate blind turns, cul-de-sacs and false routes.

Zap

Skill is to this game what rice pudding is to rugby union. Spectrum describe this as a 'Computerised electronic 'missile' game for two players designed to test hand and eye co-ordination to their limit.'

What does it do? The LEDs along the serpent's back flash in turn, giving the impression of a light travelling from one end of the game to the other. The idea is to stop the light from reaching your end of the game by stabbing at your control button when the light turns towards you. Your opponent has the same thought in mind. The light speeds up as it travels from end to end.

When you finally succumb to fatigue or boredom and the light slips through a LED on the serpent's back lights to show you the score before the next round.


For this electronic ping-pong, you'll pay around £10.95.



Then the start button can be pressed. The display first shows the start number of the maze. When that is pressed and the green marker is put in position, the display will show your destination, the finish number, on which the red marker is placed. When this is pressed, the game begins.

The unit begins to tick. If you don't make your move in 10 seconds the game self destructs, well almost. Assuming you hit a number within the 10 second limit, how do you know whether or not it's correct? Sound effects to the rescue. Hit the wrong number and the game blows a raspberry at you — charming. However, a happier melody celebrates your correct number choice. If you are playing a two player game, red and green LEDs indicate whose turn it is, with separate correct number choice tunes. When you reach your destination successfully, a winner's song announces your arrival.

Sound effects make this game a joy to play. Amaze-A-tron has a recommended retail price of £17.95.

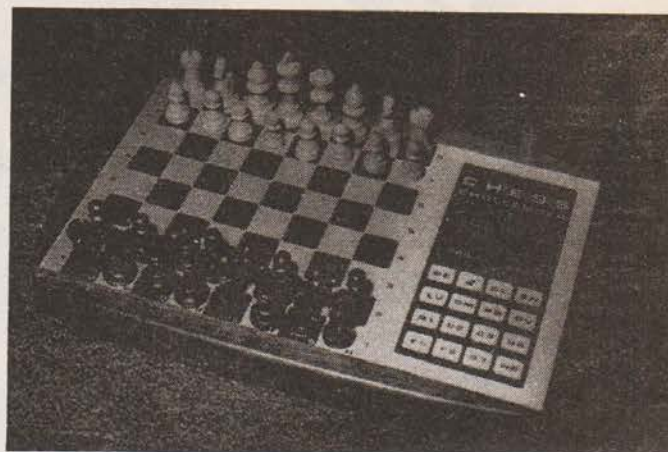

Chess Challengers

Available since April, Chess Challenger 7 is a seven level version of the computerised chess board which pioneered the UK market for microprocessor games. This miracle machine will either play against you or against itself. It allows you to change sides in mid-game, on any move.

Now available is 'son of Chess Challenger 7', namely Chess Challenger 10. You've guessed it — ten levels of play. Since the pieces are magnetised, you can turn the board upside down and not one piece will fall off its simulated leather or brushed gold foil square — for the Australian export market, do you think?


If you should execute a move incorrectly, ie misread the move shown on the display and move that piece incorrectly, it's not long before you find out about it. A few moves later, Chess Challenger will refuse to accept what appears to be a perfectly legitimate move, because its memory tells it where pieces should be, not where they are. Fortunately the player has access to the super memory. You can ask Challenger to show you, piece by piece, where everything is.

From July you will be able to buy Voice Chess Challenger — the first of this variety of solo chess game in the world that speaks. It is claimed to be the ultimate in microprocessor mini-computer wizardry.

Voice Chess Challenger features the strongest chess program ever placed in a microprocessor and is approximately twice as fast as other models in the series — that has to be an improvement at the higher levels of play. In fact this Challenger has 'infinite' levels of play. It will continue to compute its move until the halt key is pressed. The program has a large repertoire of chess book openings. At the end of the game it displays the number of moves played. The big difference between this 'wizard' and its progenitors is that it speaks every move and capture and will repeat board positions on demand.


Chess Challenger 7 is the first in this series to retail at under £100. Chess Challenger 10 will burn a £200 hole in your pocket, while Voice Chess Challenger will sell at an understandable £250.

Three Trumps from Acorn

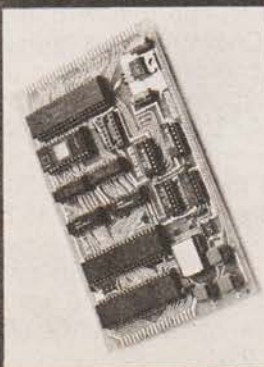

Acorn Controller


Designed as an industrial controller module, it is based on the 6502 CPU with 2K Eprom, 1.25K ram and 32 I/O lines. In eurocard format it is provided with an onboard monitor (2 x 74S571) giving comprehensive development and debugging facilities. Also available in minimum configuration for low cost OEM applications.

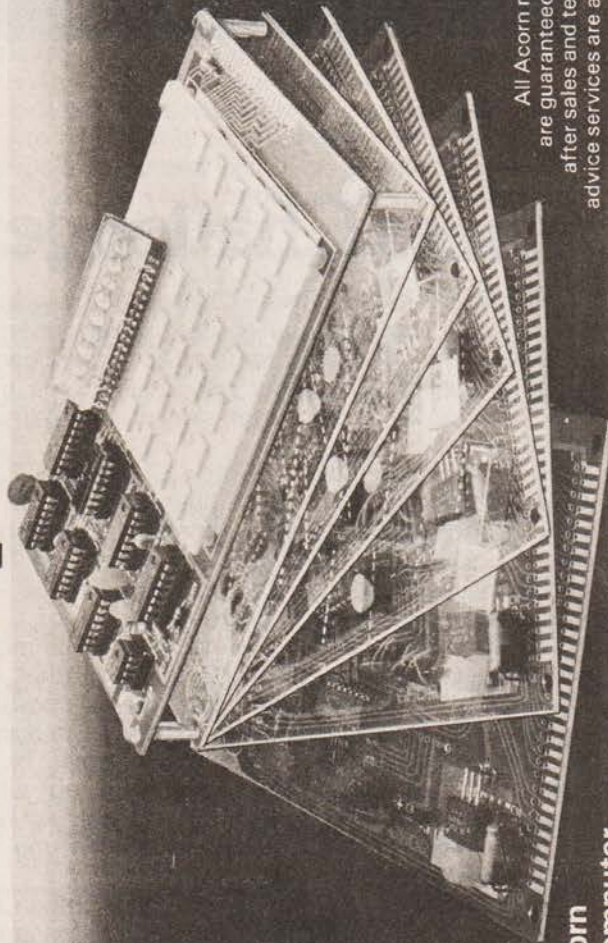

The Acorn Microcomputer

The Acorn controller module mounted beneath a matching eurocard with hex keyboard, 8 digit seven segment display and CUTS tape interface requires only a single unswitched power supply to form the powerful Acorn microcomputer.

All Acorn modules are guaranteed and full after sales and technical advice services are available.

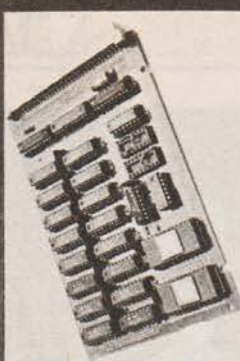

Acorn Memory


The first in our series of expansion cards is the Acorn 8K + 8K "state of the art" memory module. On a matching eurocard it provides 8K of ram (2114) and 8K of Eprom (2732) or 4K of Eprom (2716). It requires a single 5V rail, is designed for direct connection via a 32 way edge connector to the Acorn bus and is fully buffered for wiring into any system. Two onboard sockets provide independent positioning of Eprom and ram.

Although designed for expandability the Acorn Microcomputer is a complete development system for the Acorn controller and together with the Acorn Users Manual provides the perfect introduction to hex programming; the carefully optimised monitor has the following functions:

- System Program
- Set of sub-routines for use in programming
- Powerful de-bugging facility displays all internal registers
- Tape load and store



Software available soon includes 4K Editor-Assembler-Disassembler, 4K Proprietary Fast Basic, Disc operating system with full file handling. Although a standard strip of

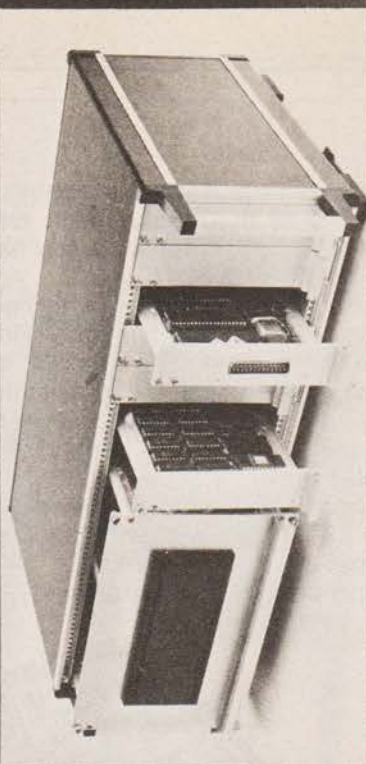

veroboard is all that is required for a full backplane, a racking system can be made available by Acorn Computers. The rack shown includes the VDU interface, two memory cards and dual floppy disc interface.

Order form

Send to: Acorn Computers Ltd. 4A Market Hill, Cambridge, Cambs.

- ☐ (qty) Acorn Microcomputer(s) in kit form at £65.00 plus £5.20 VAT
- ☐ (qty) Acorn Microcomputer(s) assembled and tested at £75.00 plus £6.00 VAT
- ☐ (qty) Acorn controller(s) (minimum configuration) at £35.00 plus £2.80 VAT
- ☐ (qty) Acorn Memory(s) assembled and tested at £95.00 plus £7.60 VAT

N.B. Price shown is for full 8K of ram, prices for smaller memory options and Eprom additions available on request.

I enclose a cheque for £..... made out to Acorn Computers Ltd.

Name _____
Address _____

Regd No
1403810



More details on last months NIM game

Last month we presented a program listing for the game of NIM; this month we will examine this program in some detail to see how it works. The first thing to do is to look at the winning strategy as this, after all, is the strategy that the computer should adopt. The winning strategy for the game of NIM is quite well known, and can be found in several maths textbooks on games theory (try Mathematical puzzles and Diversions by MARTIN GARDENER). Due to the lack of space, this strategy will only be stated and not derived.

Winning Combinations

The first thing to do is to convert the number of matches in each pile into binary. As there are up to 7 matches in each pile, three binary digits are required for this conversion. The next thing to do is to add together all the first digits of the binary numbers produced, then add all the second digits together, and all the third digits. All these additions are done in decimal. When this is done, you are left with three decimal integer answers (see table 1). In our example, these are 4, 3 and 3. If any of these three digits is odd (which two of ours are) then the person next to play is in a winning position. The object now is for that player to remove some matches such that when this calculation is done again, all the three numbers are even so that, for example, removing 3 from pile 1 would leave the three digits as 4, 2 and 2 (see table 2) which is thus a losing position for the player whose turn it is to play next.

All Is Revealed

Having looked briefly at the winning strategy which the computer adopts, let us now go on to look at the program presented as figure 1 last month. It would help if you could have that article in front of you as you read this description.

The program can very conveniently be broken into 5 main sections.

Section 1 is a subroutine which prints the current position of the board and also checks for a winning play. (Program lines 5000-5080. Flowchart Fig. 1).

PILE NO.	MATCHES IN PILE	BINARY
		4 2 1
1	3	0 1 1
2	4	1 0 0
3	5	1 0 1
4	6	1 1 0
5	7	1 1 1
COLUMN TOTALS		4 3 3

TABLE 1

PILE NO.	MATCHES IN PILE	BINARY
		4 2 1
1	0	0 0 0
2	4	1 0 0
3	5	1 0 1
4	6	1 1 0
5	7	1 1 1
COLUMN TOTALS		4 2 2

TABLE 2

Section 2 is also a subroutine and what this does is to convert the number of matches in each pile into binary and add them up as described earlier. It then makes a check to see if the computer is in a winning position or not. (Program lines 6000-7000. Flowchart Fig. 2).

Section 3 is where the program starts, and it initialises the values of variables and sets up the board. (Program lines 10-160. Flowchart Fig. 3).

Section 4 deals with the computers' opponents' move. (Program lines 163-180 and 2000-3030. Flowchart Fig. 4).

Section 5 in conjunction with Section 2 enables the computer to evaluate and play its moves. (Program lines 190-360. Flowchart Fig. 5).

We will now go through each of these sections in turn in more detail.

Section 1

If you look at Flowchart Fig. 1, you will see that we print a heading (Pile No. No. of matches) and then set up a FOR NEXT loop to print the pile numbers and the number of matches in the piles under this heading. The piles themselves are stored in A array locations A(1) to A(A) (where $3 \leq A \leq 6$) and notice that after each pile has been printed, it is checked to see if it is empty. If it is, then we branch round to the NEXT Q statement. You should see from this that if all the piles are empty the variable Z will still have the value 0 that it received at the start of the routine. After all the piles have been printed, we test the value of Z and if it is 0 we set F to 1. This means that when we jump to this subroutine to print the board, a check is also made to see if the move just played has enabled one of the players to win the game. If it has, we set F to 1 to signify this fact (this technique is called setting a flag to show that an event has occurred).

Section 2


What this subroutine is doing (see Fig. 2) is to say, "if the computer were to take R matches from pile P, would that leave the opposition in a losing position." The first thing to do is to take R matches from pile P and this is done in the first box. We then set three variables to 0, (Z, U and I) which will be used later to keep a decimal total of the binary digits. The next box sets up a FOR NEXT loop in Q from 1 to A (A is the number of piles). The next step is to convert the number of matches in each pile in turn into binary (see last month's homework answer), the three binary digits being stored in variables V, B and M. We then add V, B and M to Z, U and I respectively to keep a running decimal total of the binary numbers. The next box we encounter is NEXT Q, which branches us back to deal with the provision of the next pile.

When all the piles have been converted to binary and added up into Z, U and I, we put R matches back into pile P and then check each of the digits Z, U and I in turn to see if it is odd or even. If any of these digits are odd, we branch to the RETURN statement. Only if they are all even will the variable O be set to 1 to flag the fact that taking R from pile P is a winning move for the computer.

Section 3

This is the start of the game proper (see Fig. 3) and the first question asks who should set up the board for the game.

Fig. 1. Correct board position subroutine

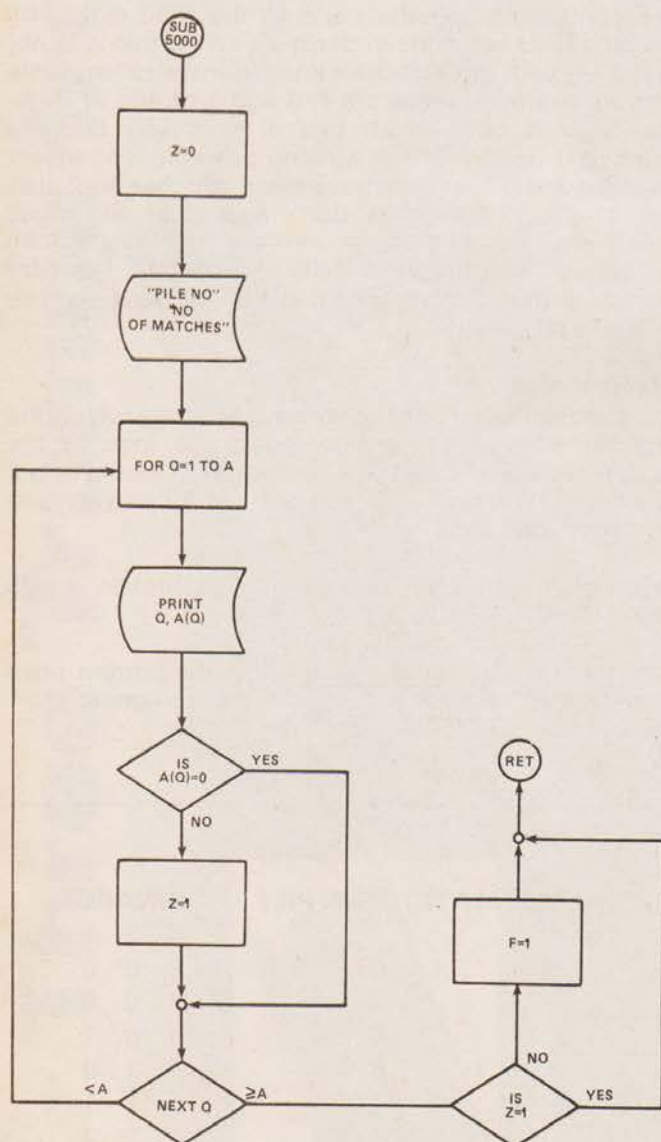


If you wish to set up the board, you type 1; if the computer is to set it up, you type 0. We then come to the "IS A=0" decision box. If the answer is YES, we branch right and the computer will pick a random number of piles (variable A such that $3 < A < 6$) and put a random number of matches in each pile (program lines 150-160). If the answer to "IS A=0" is NO, we continue down the flowchart and a question and answer session follows which allows you to set up the board (program lines 30-90). Which ever route we take, we end up at marker A and move on to flowchart Fig. 4.

Section 4


The first box in Fig. 4 jumps to subroutine at line 5000 (Fig. 1) and prints out the position of the board that has just been set up in section 3. It is not expected that F will be set to 1 at this point, and so it is not checked. The next three boxes deal with the question of who should start first, and Fig. 4 shows what happens if you choose to move first. You are asked which pile you wish to take from, and how many matches you wish to take from this pile. These matches are then removed (program lines 2000-2035). We then branch to subroutine at line 5000 (Fig. 1) to print the board and since a move has

Fig. 2. Pile check subroutine

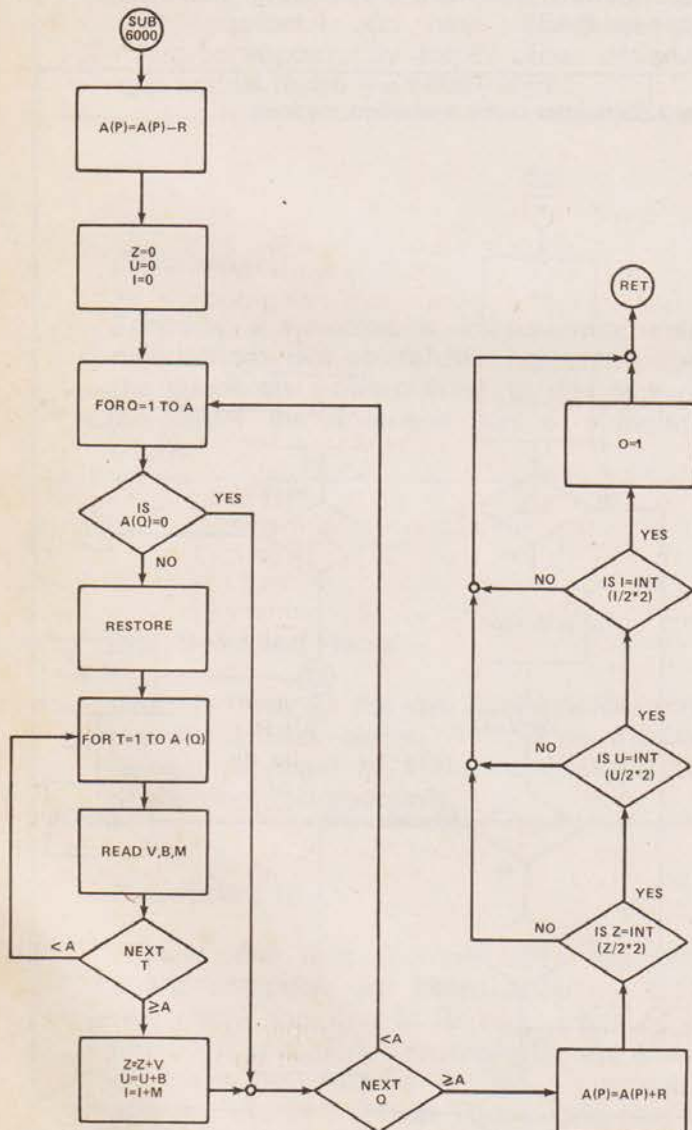

DATA 0, 0, 1, 0, 1, 0, 0, 1, 1, 1, 0, 0, 1, 0, 1, 1, 0, 1, 1, 1

Fig. 3. Board set up routine

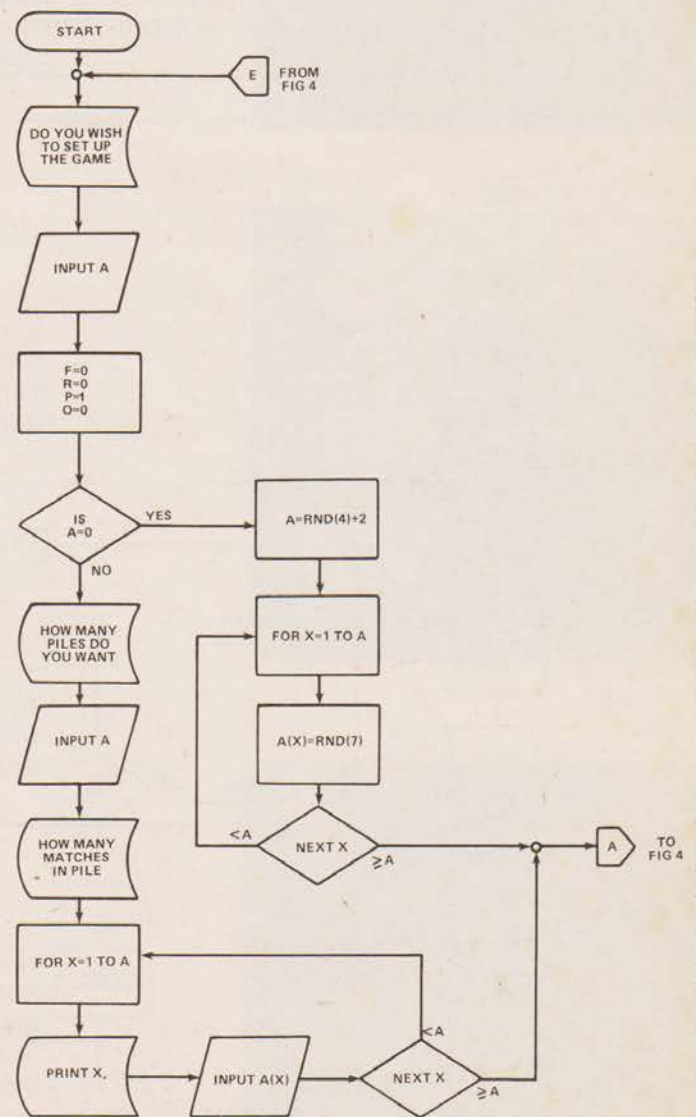

been made, the flag F is tested upon return. If the flag is set (which it shouldn't be after only one move) you are told you have won, and asked if you wish to play again. If you do, the program branches via marker E back to the start box in Fig. 3. If not, the program ends. Assume, however, that your first move did not enable you to win! (The reason for the check at this point is because this section is used every time you make a move and sooner or later you may well win). The program then branches to marker B in Fig. 5 which is the same place as you would have reached if you had decided to let the computer play first.

Section 5

This section works out the computer's move (see Fig. 5) and when you see the amount of work done, you will also see that it takes full advantage of the computer's speed. What happens in effect is that the computer starts with pile 1 ($P=1$) or the first pile that contains matches ($A(P) > 0$) and takes 1 match from that pile ($R=1$). A branch is then made to the subroutine at line 6000 (Fig. 2) where a check is made to see if this is a winning move ($O=1$). If it is, then this move is made. If it is not a winning move, then another match is taken from the

pile ($R=2$) and the check is made again. Checking continues through all the matches ($R=1$ TO $A(P)$) in this pile and if no winning move is found, the computer moves on to the next pile that contains matches and checks all the possibilities in this second pile. This continues until either all the piles have been checked and no winning move is found, or until taking R matches from pile P produces a winning position ($O=1$). If O ever equals 1, that move is made. If no winning move is found, then a move is made at random. After the computer has made its move, we GOSUB 5000 to print the current board and to check for a win. If the computer's move has given it the game ($F=1$) this fact is printed, and we branch to marker D in Fig. 4 (Do you wish to play again?). If the computer has not won by its move, we branch to marker C in Fig. 4 for you to make your next move. At this point, I am taking my 23rd aspirin, and gratefully declare that to be it for this month. Probably the best homework for this month would be to go through and master the above program and flowcharts.

Next month, we'll take a break and make a start on extended BASIC.

Fig. 4. Opponents move routine


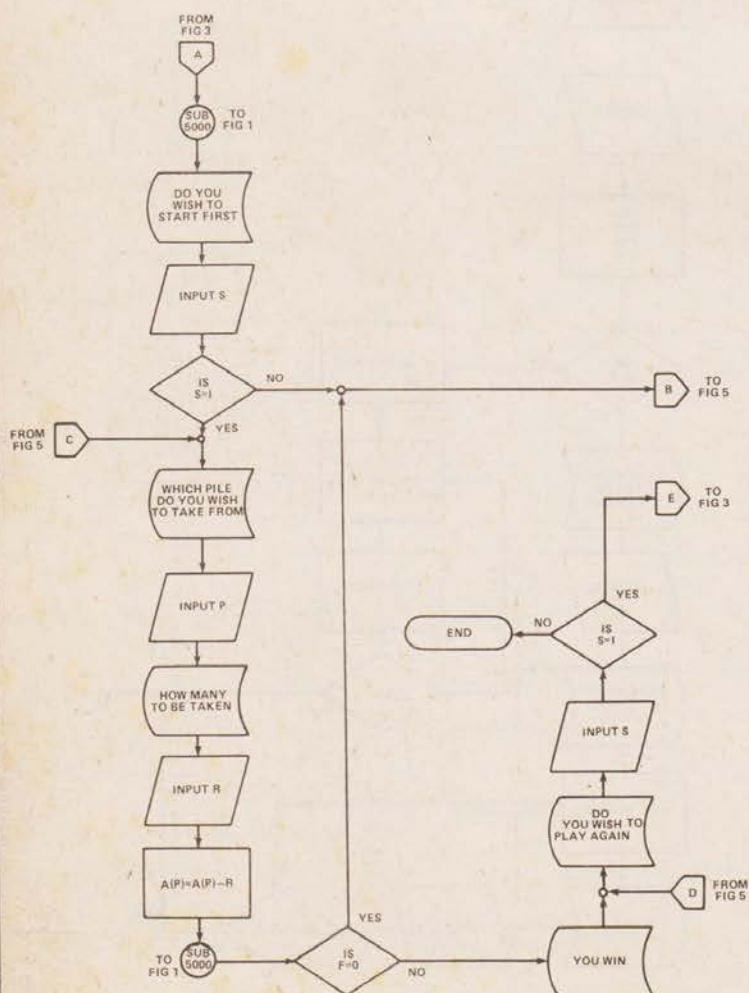


Fig. 5. Computer move evaluation routines

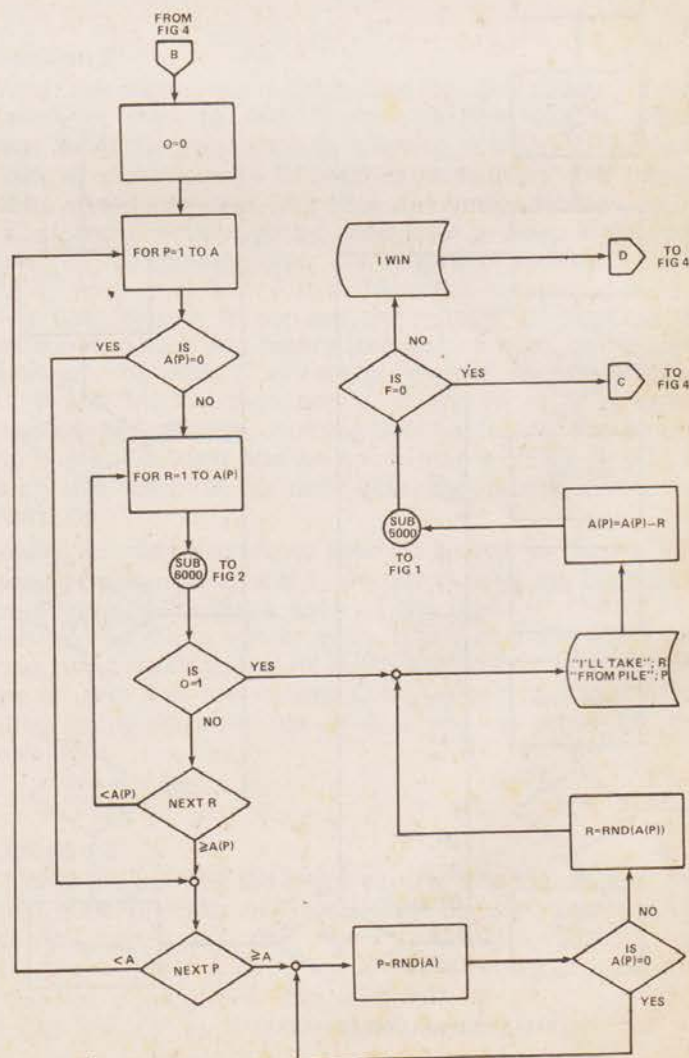

computing today

WHAT TO LOOK FOR
IN THE **JULY** ISSUE
ON SALE 15TH JUNE

MPUs By Expt.


One of the problems of becoming heavily involved in the software size of MPU technology is that the sheets of printout tend to obscure the hardware producing it.

Its a shame that more micro-men are not more knowledgable about the centre of their universe is it not? Naturally CT is doing something to redress this imbalance and next month we begin our "Microprocessors By Expt" series designed to lead one and all down the binary path.



Show report.

Spending a weekend in Florida may sound like a nice holiday but our faithful reporter brought home the goods on a micro-show. In this pictorial report we reveal the American way of showing off the goods.

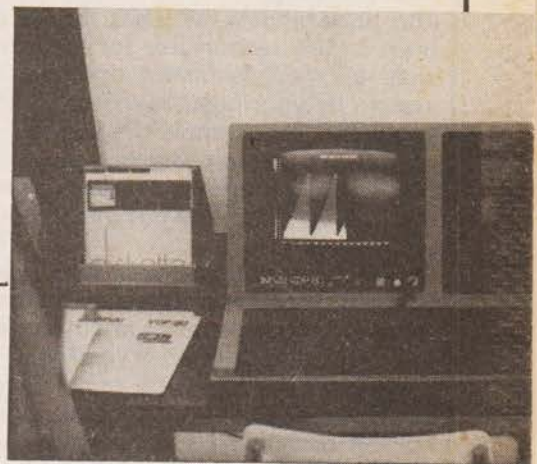


Bits, Bytes and Pieces

Another look at the world of micro-electronics in our occasional series. The Vice President and General Manager of Motorola discusses the future of electronic components.

Superboard II

It was the first (commercially available) single board computer we heard about — ETIs Triton was really the first in Britain — but as yet it has not been considered seriously by the enthusiasts — or magazines (shame on us) — in this country and we thought it was about time that CT came riding over the hill and provided a full review to save the day! Next month we reveal all there is to know about this one PCB machine.

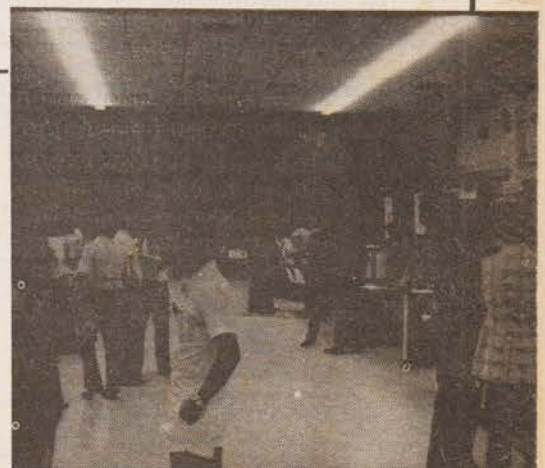

Details on one of the most misunderstood bus structures around

The pin designation and printed circuit card size originally used in the Altair 8800 computer has become somewhat of a standard in both the US personal computing scene and elsewhere in the world. So much so that there are over 40 manufacturers supplying electronic and mechanical products for the Altair bus. The bus has picked up a new name during this flurry of interest and is now being called the S100 bus.

Originally defined by MITS when they designed the Altair 8800 computer around the 8080 microprocessor, the S100 gained momentum as a 'standard' when IMSAI released their computer, again 8080 based, with this bus structure. Now the range of boards available includes memory expansion, the most common floppy disc controllers, graphics boards, multifunction and analogue I/O boards, video interfaces and even speech synthesis and recognition systems. 1977 saw a new dimension added to the S100 bus. This was the year when various other CPU's became available as S100 structured boards. These included the Z80, the 6800 and the ever popular microprocessors 6502.

Expandability?

The huge variety of S100 format boards available has been largely responsible for its growing popularity. This wide choice has meant that you can tailor your own system by your needs by simply choosing the cards that you want. For example the addition of a graphics facility. You either spend a fortune on a graphics terminal or buy yourself a graphics board for your S100 system and not only save money but get a more flexible solution to your needs.

However the S100 system is not without its critics, not that other bus systems are perfect, and the real source of most of the arguments about the system are caused by the lack of information available on it. This lack of knowledge is not a very good thing when one is in the position of spending several tens of pounds on an add-on or hundreds on a system. At the present time the personal computer buffs are doing one of three things with the S100, ignoring it completely and using something else, buying a strict S100 system with proven boards and thirdly using the bus but with their own inter-

pretation of the controls to suit their own microprocessor. Obviously the first and second groups will not have too much trouble but the third will need information on the bus structure. That information is what we hope to provide in this article.

Criticisms

The bus is also criticised because it is not completely standardised, the control signals are getting to be rather outdated and more complex than they need to be. The justification for the claims stated above is that when the manufacturers look at the specification for the device that they are building some control lines can be interpreted in different ways and hence although variations do exist the boards work. What worries the users is that whilst board A may work on the bus and board B may work on the bus board A will not necessarily work with board B! The only way round this confusion is to try out the board before actually parting with your money and here your users club will probably be able to help. As the S100 bus was designed around the 8080 when several of its support chips such as the 8228 and 8224 were not available there are more control signals on the bus than absolutely necessary. One good example is the provision of three lines to send the two clock phases and CLOCK. The newer processors have the oscillators built into the chip, others use only a single phase clock. However this surplus of control lines does have one advantage, that is the redundancy of information. To the system designer this is the flexibility that he can build into his system. The bus also has some unique control lines that he can build into his system. One example is the provision of a remote memory protect. The S100 definition allows for a memory protect flip-flop on the memory board. Applying a momentary positive pulse on the MEMORY PROTECT line sets this flip-flop and prevents data being written into memory on that board.

Designing Your Own S100


The physical facts of S100 are given in Fig. 1, a picture worth a thousand words. The bus supports sixteen address lines, allowing 65536 bytes of memory to be uniquely addressed. There are also two 8-bit data buses, one for data input (data flowing to the CPU) and one for data output (data flowing from the CPU to memory or peripherals).

There is also a set of control lines that are used for synchronisation, timing data flow control and status control because the Altair is an 8080 based computer many of the control signals can be found described in the Intel data sheets. They can be found by looking at the similarity of names in Table 1 to those in the Intel User's Manual.

The S100 Definition calls for each board to have its own voltage regulators. To this end there are lines carrying unregulated voltages. There is +8V on pins 1 and 51, +16V on pin 2 and -16V on pin 52. Ground is pins 50 and 100.

When you examine the different signals in Table 1 you will notice frequent reference to the front panel. In fact many of the controls signals are generated on it. The Altair 8800 required the front panel to control the CPU board. However the newer CPU boards do not use front panel boards and themselves generate most of the control signals that are required by the S100 bus. This has happened through the use of an on-board ROM

Fig. 1. Standard S100 cards are 10" by a nominal 5.3". Some manufacturers change the height depending on circuit requirements. Edge connector spacing is 0.125", offset to prevent backward insertion of a board.

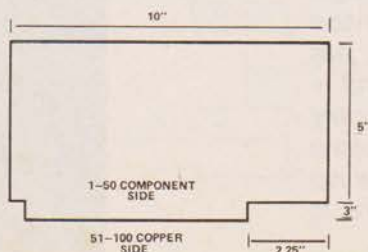

THE S100 BUS

monitor program. You will need to bear this in mind if you plan to design and build your own CPU card.

S100 Bus Structure

The S100 Bus Structure consists of 100 lines. These are

arranged with 50 on each side of the plug-in cards. The 'P' prefix indicates a processor command or control signal while the 'S' prefix indicates a processor status signal. All bus signals with the exception of the power supplies are TTL levels.

BUS DEFINITION			Table 1. The bus signals on an S100.
PIN No.	SYMBOL	NAME	EXPLANATION
1	+8V	+ 8 Volts	Unregulated input to +5 V regulators Positive unregulated voltage For special applications: pulling this line low will cause the processor to enter a WAIT state and allows the status of the normal Ready line (PRDY) to be examined.
2	+16V	+ 16 Volts	
3	XRDY	External Ready	
4	V10	Vectored Interrupt Line 0	
5	V11	Vectored Interrupt Line 1	
6	V12	Vectored Interrupt Line 2	
7	V13	Vectored Interrupt Line 3	
8	V14	Vectored Interrupt Line 4	
9	V15	Vectored Interrupt Line 5	
10	V16	Vectored Interrupt Line 6	
11	V17	Vectored Interrupt Line 7	<p>This input to the CPU board tri-states the buffers that output the status information to the bus. Signals affected are SINTA, SWO, SSTACK, SHLTA, SOUT, SMI, SINP, and SSMEMR.</p> <p>This input to the CPU board tri-states the buffers that output the 8080 control signals to the bus. Signals affected are SYNC, DBIN, WAIT, WR, HLDA and INTE.</p> <p>Is an input to the memory protect flip-flop on a memory board. To protect the contents of such boards a positive pulse should be applied to pin 70 to set the protect flip-flop. A positive pulse on the UNPROT line will reset the flip-flop.</p> <p>This signal indicates the processor is performing a single step. It comes from the front panel and is an input to the CPU.</p> <p>This input to the CPU tri-states all 16 address buffers and so isolates the 8080 address bus from the system address bus.</p> <p>This CPU board input tri-states the data out buffers. Use of the signals on pins 18, 19, 22 and 23 effectively disconnect the CPU board from the system for DMA.</p> <p>This CPU output indicates that the 8080 has entered the hold state and that the address and data outputs of the chip have gone tri-state (though not necessarily their buffers).</p> <p>CPU output indicating 8080 in wait state.</p> <p>CPU output indicating that the 8080 interrupt system is enabled and the chip will respond to interrupts.</p>
18	STA DSB	Status Disable	
19	C/C DSB	Command/Control Disable	
20	UNPROT	Unprotect	
21	SS	Single Step	
22	ADD DSB	Address Disable	
23	DO DSB	Data Out Disable	
24	$\phi 2$	CLOCK PHASE 2	
25	$\phi 1$	CLOCK PHASE 1	
26	PHLDA	Hold Acknowledge	
27	PWAIT	Wait	
28	PINTE	Interrupt Enable	
29	A5	Address Line 5	
30	A4	Address Line 4	
31	A3	Address Line 3	
32	A15	Address Line 15	
33	A12	Address Line 12	
34	A9	Address Line 9	
35	DO1	Data Out Line 1	
36	DO0	Data Out Line 0	
37	A10	Address Line 10	
38	DO4	Data Out Line 4	
39	DO5	Data Out Line 5	
40	DO6	Data Out Line 6	
41	D12	Data In Line 2	
42	D13	Data In Line 3	
43	D17	Data In Line 7	

THE S100 BUS

44	SMI	M1
45	SOUT	OUT
46	SINP	INP
47	SMEMR	MEMR
48	SHLTA	HLTA
49	CLOCK	Clock
50	GND	Ground
51	+8 V	+8 Volts
52	-16 V	-16 Volts
53	SSW DSB	Sense Switch Disable
54	EXT CLR	External Clear
55-67		
68	MWRT	Memory Write
69	PS	Protect Status
70	PROT	Protect
71	RUN	Run
72	PRDY	Ready
73	PINT	Interrupt Request
74	PHOLD	Hold
75	PRESET	Reset
76	PSYNC	Sync
77	PWR	Write
78	PDBIN	Data Bus In
79	A0	Address Line 0
80	A1	Address Line 1
81	A2	Address Line 2
82	A6	Address Line 6
83	A7	Address Line 7
84	A8	Address Line 8
85	A13	Address Line 13
86	A14	Address Line 14
87	A11	Address Line 11
88	DO2	Data Out Line 2
89	DO3	Data Out Line 3
90	DO7	Data Out Line 7
91	D14	Data In Line 4
92	D15	Data In Line 5
93	D16	Data In Line 6
94	D11	Data In Line 1
95	D10	Data In Line 0
96	SINTA	INTA
97	SWO	WO
98	SSTACK	Stack
99	POC	Power On Clear
100	GND	Ground

CPU status output; indicates instruction fetch cycle (important for front panel operation as machine must halt on M1).

Indicates execution of an OUT instruction: address bus contains I/O port address and data bus will contain output data when PWR active. All memory boards should be disabled when SOUT or SINP at logic 1. As SOUT, but for an IN instruction. Data to be input should be placed on the data bus when PDBIN is active. CPU output indicating memory read in progress.

CPU status output: halt acknowledge.

In the Altair this is the inverted output of the 2 MHz oscillator that generates the two phase clock. However, other S100 cards are not staying with 2 MHz. The Morrow, for instance, outputs 18 MHz from its 8224 clock driver, while Z-80 and other systems differ again. You have now read half way through this; congratulations on your perseverance and I hope you find what you're looking for!

See Pin 1

Negative unregulated voltage.

CPU input; disables data input buffers so that data from the front panel sense switches may be strobed onto the processor's bidirectional data bus.

Generated by the front panel; is used by the Altair as a reset signal for I/O devices. In other systems it is tied together with RESET and POC.

Are currently undefined on the Altair systems. However, a number of proposals have been put forward for their use. One proposal calls for a real time clock on pin 55 and the use of 56 — 60 as memory board selects. This would allow memory expansion in banks. Another proposal calls for 56 to be a strobe signal obtained from the 8224 clock chip and for pins 62 — 66 to be used for interface mass memory. For the time being, these pins are fair game for any special signals your system may require.

A function of WR and SOUT, indicating data on data out bus to be written into memory.

An output from the memory board currently being addressed, indicates status of memory protect flip-flop. Is the input to the memory protect flip-flop on the board currently addressed.

Indicates the state of the RUN/STOP flip-flop.

CPU board input that controls the run state of the processor. Pulling PRDY low causes the processor to enter a wait state until PRDY goes high again.

Causes the processor to enter a Hold state and subsequently acknowledge by putting PHLDA high.

Resets program counter to zero.

Identifies beginning of a machine cycle.

Indicates data is being written to memory or I/O. Data on bus is stable while PWR is low.

Processor output control signal indicating that data is being read into the CPU. Data on the data bus should be stable while PDBIN is high.

Indicates interrupt acknowledge.

Processor output indicating write cycle.

Processor output indicating that the address bus holds the stack pointer.


When mains is first applied this signal is generated to set up initial conditions on other boards in the system.

ELF II

THE TRIED AND TESTED
MINICOMPUTER
SYSTEM
THAT EXPANDS
TO MEET
YOUR NEEDS



ELF II
BOARD WITH VIDEO OUTPUT
NOW ONLY
£79.95 + £6.40 VAT

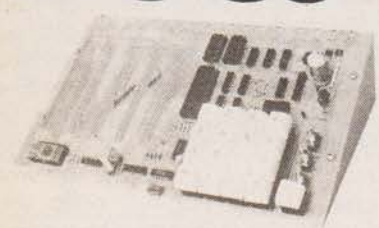

SPECIFICATION:
*RCA 1802 8-bit microprocessor,
with 256 byte RAM —
expandable to 64K bytes
*RCA 1861 video IC to display
program on TV screen via the RF
Modulator
Single Board with
Professional hex keyboard — fully
decoded to eliminate the waste
of memory for keyboard decoding
circuits
Load, run and memory protect
switches
16 Registers
Interrupt, DMA and ALU
Stable crystal clock
Built in power regulator
5 slot plug in expansion bus
(less connectors)

To: Newtronics
The personal computer division of
HL Audio Ltd
138 Kingsland Road, London E2 8BY 01-739 1582
Please send me the items ticked below:
(Choose either components or wired and tested units)

INC. VAT

ELF II KIT COMPLETE WITH FULL WIRING INSTRUCTIONS AND OPERATING MANUAL 86.35
ELF II KIT WIRED AND TESTED 107.95
ELF II DELUXE CABINET 24.85
POWER SUPPLY (6.3V) FOR ELF II 5.40

EXPAND YOUR ELF II with the following hardware, a comprehensive range that is being continually increased through research and development.

GIANT BOARD KIT — includes a system monitor/editor that works on all 64K bytes of possible memory; a cassette I/O routine for recording programs on an ordinary cassette; two 8 bit parallel I/O ports with handshaking for connecting the ELF II to a printer and ASC II keyboard or any 8 bit parallel interface. The serial RS 232 and 20ma TTY I/O's allow connection to printers, terminals or any serial I/O device 37.80

GIANT BOARD WIRED AND TESTED 59.40
4K STATIC RAM BOARD — Add up to 16K on board. ELF II will accept up to 64K and is addressable to any page to 64K. Requires ELF II expansion power supply 75.00

4K STATIC RAM BOARD WIRED AND TESTED 97.15
EXPANSION POWER SUPPLY — required when adding 4K RAM Boards 20.52

ASC II KEYBOARD — Complete with connector to plug directly into the ELF II Giant Board and is powered by the ELF II Expansion Power Supply. The ASC II Keyboard follows the standard typewriter configuration and generates the entire 128 character ASC II upper/lower case set with 96 printable characters, with onboard regulator, parity logic selection and 4 handshake signals 54.63

ASC II KEYBOARD WIRED AND TESTED 75.22
ASC II DELUXE CABINET 16.22

RF MODULATOR to use with TV 3.00
KLUGE PROTOTYPE BOARD — accepts up to 36 IC's in 40, 24, 18, 16 pin formats with space available for an onboard regulator 13.82

86 PIN GOLD PLATED CONNECTORS (One required for each add on Board) 4.32
ELF II LIGHT PEN TO WRITE OR DRAW ON TV SCREEN 7.02

AVAILABLE SHORTLY TO EXTEND THE SCOPE OF YOUR ELF II:
VIDEO GRAPHICS BOARD

VIDEO DISPLAY BOARD KIT — 32 or 64 characters 16 line upper and lower case 75.55
VIDEO DISPLAY BOARD WIRED AND TESTED 97.15

THE SOFTWARE that makes ELF II an ideal machine with which to learn computer techniques rapidly:

ELF II TINY BASIC CASSETTE TAPE — Makes programming even easier. Commands include: Save, Load, Let, If/Then, Print, Goto, Gosub, Return, End, Rem, Clear, List, Run, Plot, Peek and Poke. **TINY BASIC ALSO INCLUDES:** 16 bit integer arithmetic $\pm x - ()$ and 26 variables A-Z and also comes fully documented with an alphanumeric generator for direct display on your TV 14.58

ELF-BUG Monitor Cassette eliminates the need to single step through a program to find the contents, with the ability to run and edit from any point in the memory 14.58

'SHORT COURSE IN PROGRAMMING' by Tom Pittman. Written specifically for the ELF II as a step-by-step course which fully exploits the potential of ELF II 4.00

'SHORT COURSE IN TINY BASIC' by Tom Pittman teaches how to program in Tiny Basic 4.00

RCA 1802 Users Manual 4.00

I enclose cheque/PO No.
(Add £2 post and packing for orders over £20)
or charge
Barclaycard No.
Access Card No.


for £

Name

Address

Signature

Hours of business: Mon-Fri 9.30 — 5.30, Sat 9.30 — 1.00
Dealer Enquiries Welcome
Telephone Orders Accepted 01-739 1582



Happy Memories

21L02	450ns	80p	2114	450ns	£5.25
21L02	250ns	95p	2114	250ns	£5.50
4116	250ns	£7.50	2708	450ns	£6.75

TRS-80 16K Memory Upgrade Kit £70

Full instructions included

\$100 16K Static RAM Kit 250ns £195

Bank select, 4K boundaries, all sockets, components and instructions included with 4K £81, with 8K £119, with 12K £157. A&T add £15

NASCOM Dealers for the South coast

Science of Cambridge Mk 14:

Set of 18 Texas low-profile sockets £2-80

Texas low-profile DIL sockets:

pins 8. 14. 16. 18. 20. 22. 24. 28. 40.
pence 10. 11. 12. 17. 18. 20. 22. 28. 38.

Antex 1mm bits CCN or CX17 45p

Call or write for price lists

VAT at 8% included. 20p p+p under £10 order



19 Bevois Valley Road,
Southampton SO2 0JP
Tel. (0703) 39267

BUILD THE 12,000 ALREADY SOLD NASCOM I COMPUTER



WE ARE THE SOLE APPROVED LONDON
STOCKIST & NATIONAL DISTRIBUTOR

KITS IN STOCK:

● BRITISH DESIGN ● U.K. BEST SELLING KIT
FULL AFTER SALES SERVICE & GUARANTEE

NEW LOW PRICE
£165 + 8% VAT
POST FREE

FEATURES:

FREE B-BUG WITH EVERY KIT

- * SUPPLIED IN KIT FORM FOR SELF ASSEMBLY
- * FULL DOCUMENTATION SUPPLIED
- * FULLY SCREENED DOUBLE-SIDED PLATED THROUGH HOLE PRINTED CIRCUIT BOARD
- * FULL 48 KEY KEYBOARD INCLUDED
- * 2K X RAM
- * 1K X 8 MONITOR PROGRAM PROVIDING POWERFUL MOSTEK 280 CPU
- * 16 X 48 CHARACTER DISPLAY INTERFACE TO STD. UNMODIFIED TV
- * TV DISPLAY MEMORY MAPPED FOR HIGH SPEED ACCESS
- * ON BOARD EXPANSION TO 2K X 8 EPROM
- * ON BOARD EXPANSION FOR ADDITIONAL 16 I/O LINES
- * MEMORY MAY BE EXPANDED TO FULL 60K

SOFTWARE

- * 1K X 8 MONITOR PROGRAM PROVIDING
- * 8 OPERATING COMMANDS SUPPORTING MEM EXAMINE/MODIFY/TABULATE/COPY/BREAK/SINGLE STEL EXECUTE TAPE LOAD TAPE DUMP
- * REFLECTIVE MONITOR ADDRESSING FOR FLEXIBLE MONITOR EXPANSION THROUGH USER PROGRAMS
- * MONITOR SUB-ROUTINES INCLUDE — DELAY ASCII CODING. BINARY TO HEX CONVERSION. CLR SCREEN. SCROLL UP. STRING PRINT. CURSOR SHIFT AND MANY OTHERS

EXPANSION

- * EXPANSION BUFFER BOARD £32.50
- * MEMORY KITS (INCLUSIVE ALL HARDWARE)
- 8K £85.00
- 16K £140.00
- 32K £200.00
- * I/O BOARD WITH DECODERS AND ALL HARDWARE EXCEPT ICS £35.00
- WILL ACCEPT UP TO 3 PIOs 1 CTC AND 1 UART

OTHER HARDWARE

- * 3A POWER SUPPLY FOR UP TO 32K EXPANSION £19.90
- * 3A POWER SUPPLY FOR UP TO 32K EXPANSION MKII £24.50
- * 8A POWER SUPPLY FOR LARGER THAN 32K EXPANSION £60.00
- * EXPANSION CARD FRAME £29.50
- * EPROM PROGRAMMER £40.00
- * EPROM ERASER £25.00
- * KEYBOARD CABINET £3.50
- * PROGRAMMING MANUAL £4.00

NEW NEW 1.4 Operating System in (2) 2708 EPROMS upwards compatible from

12 & B Bug TINY BASIC £25.00
SUPER TINY BASIC (with Editor & Machine Utility routines) £25.00
ZEAP ASSEMBLER EDITOR £35.00
£32.00

● Demonstrations continuous daily — we welcome export. Educational and industrial enquiries.
FREE BROCHURE. SEND S.A.E. 9½" x 6½", STAMP 12½p. VAT 8% ALL ITEMS EXCEPT BOOKS.

Henry's


Phone (01) 723 1008

All mail to:
Henry's Radio
404 Edgware Rd.
London, W2



COMPUTING TODAY – JUNE 1979

NASCOM PACKAGE

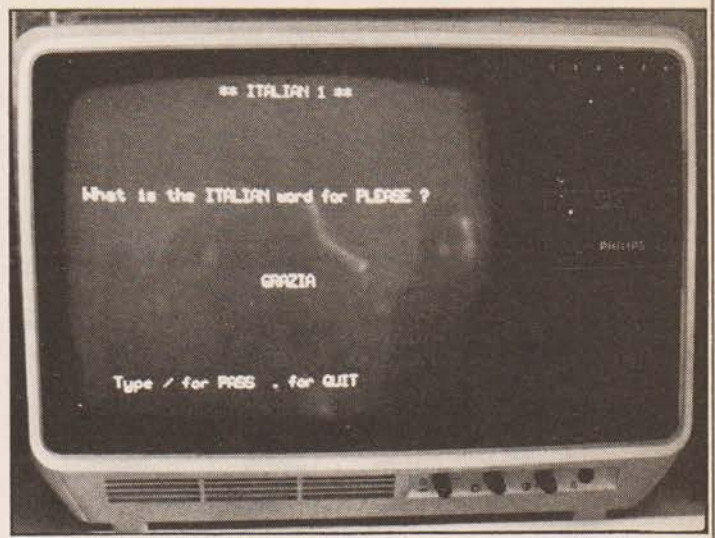

C9C 21 0E 0E
C9F CD 79 0C
CA2 EF
CA3 Type / for PASS., for QUIT □
CC3 CD 40 02
CC6 C3 06 0D

CHOICE

CC9 16 25
CCB E1
CCC ED 5F
CCE 47
CCF 4F
CD0 CB 89
CD2 7A 'FIND 1'
CD3 23 'FIND 2'
CD4 BE
CD5 20 05
CD7 21 2A 0E
CDA 18 F6
CDC 10 F5 'FIND 3'
CDE 23 'FIND 4'
CDF 3E 28
CE1 BE
CE2 28 10
CE4 7A
CE5 BE
CE6 20 F6
CE8 CB 49
CEA C2 82 0D
CED CB C9
CEF 21 C5 0D
CF2 18 EA
CF4 CB 89 'FIND 5'
CF6 34
CF7 23
CF8 E5
CF9 D1
CFA AF
CFB 23 'FIND 6'
CFC BE
CFD 20 FC
CFF 23
D00 E5
D01 18 8A
D03 1 register for correct answer score
D04 1 register for wrong answer score
D05 1 register for pass score

HL = 0E08
Call 'SUB 1'
STRING
Call CRLF
JP - 'TEST'

D = 25
POP HL
RANDOM No
B, A
C, A
RST C Bit 1
A, D
INC HL
CP (HL)
JRNZ 'FIND 3'
HL = 0E2A
JR - 'FIND 1'
DJNZ - 'FIND 2'
INC HL
A = 28
CP (HL)
LRZ - 'FIND 5'
A, D
CP (HL)
JRNZ - 'FIND 4'
TEST C Bit 1
JZ - 'QUIT'
Set C Bit 1
HL = 0DC5
JR - 'FIND 4'
RST C Bit 1
INC (HL)
INC HL
PUSH HL
POP DE
XOR A
INC HL
CP (HL)
JRNZ - 'FIND 6'
INC HL
PUSH HL
JR - 'QUEST'

TEST
D06 D9
D07 EB
D08 E5
D09 01 1E 0A
DOC C5
DOD CD 3E 00 'CHIN'
D10 FE 1F
D12 28 16
D14 FE 2F
D16 28 24
D18 FE 2E
D1A 28 66
D1C FE 1D
D1E 20 06
D20 0B
D21 3E 20
D23 02
D24 18 E7
D26 02 'N/L 0'
D27 03
D28 18 E3
D2A C1
D2B 0A 'N/L 1'
D2C BE
D2D 20 04
D2F 03
D30 23
D31 18 F8
D33 AF
D34 BE
D35 28 0E
D37 18 16
D39 00
D3A 00
D3B 00


PASS
D3C 21 05 D
DF3 CD C1 D
D42 E1
D43 18 10

CORRECT
D45 21 03 0D
D48 CD C1 0D
D4B E1
D4C C3 69 0C

EXX
EX HL, DE
PUSH HL
BC = 0A1E
PUSH BC
Call CHIN
CP = 1F
JRZ - 'N/L'
CP = 2F
JRZ - 'PASS'
CP = 2E
JRZ - 'QUIT'
CP = 1D
JRNZ - 'N/L 0'
BEC BC
A = 20
(BC), A
JR - 'CHIN'
(BC), A
INC BC
JR - 'CHIN'
POP BC
A, (BC)
CP (HL)
JRNZ - 'N/L 2'
INC BC
INC HL
JR - 'N/L 1'
A = 0
CP (HL)
JRZ - CORRECT
JR - WRONG
NOP
NOP
NOP

HL = 0D05
CALL DAA
POP HL
JR - ANS

HL = 0D03
CALL DAA
POP HL
JP - 'PRINT TITLE'

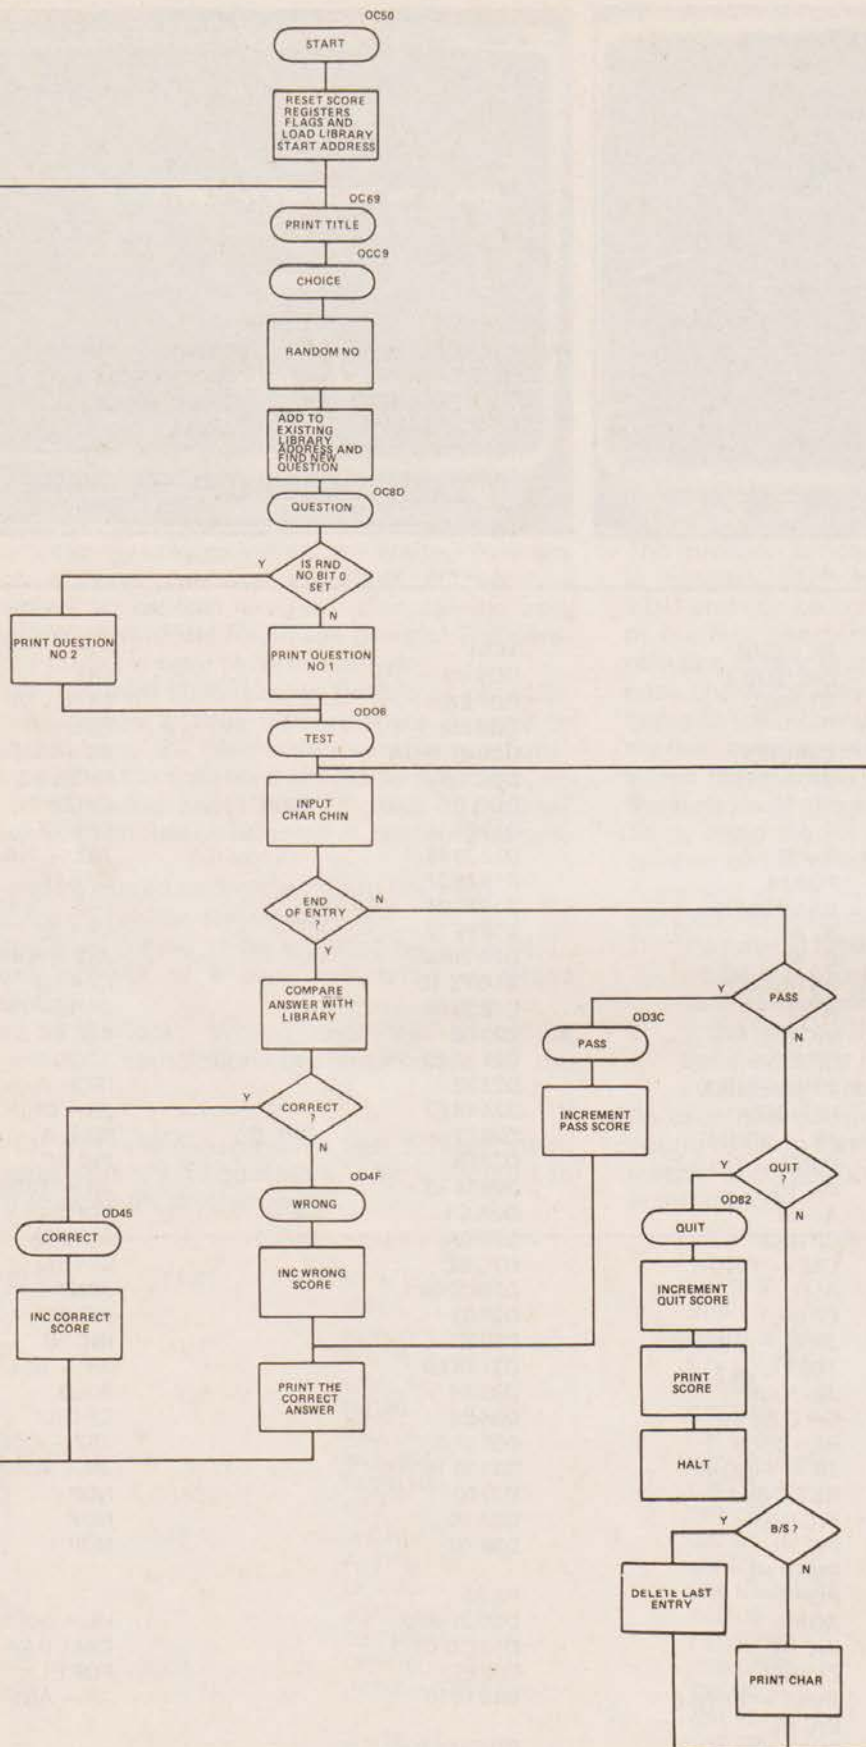

**** SIMILES A ****

COMPLETE: As GRAVE as a?

Type / for PASS . for QUIT
SCORE RIGHT 10 WRONG 03 PASS 02.

**** ITALIAN 1 ****

Tradurre in INGLESE DIRITTO ?

LEFT

The correct answer is RIGHT

Type / for PASS . for QUIT
Push bar to continue.

**** SIMILES A ****

COMPLETE: As LOYAL as a?

BAT

The correct answer is a DOVE

Type / for PASS . for QUIT
Push bar to continue.

**** SIMILES A ****

COMPLETE: As WITLESS as a?

POLITICIAN

The correct answer is a JACKAM

Type / for PASS . for QUIT
Push bar to continue.

**** SIMILES A ****

COMPLETE: As PRETTY as a?

PICTURE

Type / for PASS . for QUIT

NASCOM PACKAGE

WRONG

D4F AF
D50 21 04 0D
D53 CD C1 0D
D56 21 D6 0D
D59 01 90 0A
D5C CD B8 0D
D5F E1
D60 CD B8 0D
D63 EF
D64 Push bar to continue ☐
D7C CD 3E 00
D7F C3 69 0C

QUIT

D82 EF
D83 Score RIGHT ☐
D93 21 03 0D
D96 7E
D97 CD 44 02
D94 EF
D98 WRONG ☐
DA4 23
DA5 7E
DA6 CD 44 02
DA9 EF
DAA PASS ☐
DB3 23
DB3 7E
DB4 CD 44 02
DB7 76

PRINT

DB8 7E
DB9 FE 00
DBB C8
DBC 02
DBD 03
DBE 23
DBF 18 F7
DAA
DC1 7E
DC2 3C
DC3 27
DC4 77
DC5 C9

XOR A

HL = 0D04
CALL DAA
HL = 0DD6
BC = 0A90
CALL PRINT
POP HL
CALL PRINT

Call CHIN

JP - PRINT TITLE

HL = 0D03

A, (HL)
CALL B2HEX

INC HL

A, (HL)
CALL B2HEX

INC HL

A, (HL)
CALL B2HEX
HALT

A, (HL)

CP = 0
RZ
(BC), A
INC BC
INC HL
JR - PRINT

A, (HL)
INC A
DA
(HL), A
RTN

ENGLISH 7

ANTONYMS A

DC6 * ANTONYMS A * ☐
DD6 The correct answer is ☐
DED What is the antonym of ☐
EO5 ? ☐

LIBRARY

EO8 (COLD <input type="checkbox"/> HOT <input type="checkbox"/> (FIND <input type="checkbox"/> LOSE <input type="checkbox"/> (BRIGHT <input type="checkbox"/> DULL <input type="checkbox"/> (UGLY <input type="checkbox"/> PRETTY <input type="checkbox"/> (COARSE <input type="checkbox"/> FINE <input type="checkbox"/> (PROUD <input type="checkbox"/> HUMBLE <input type="checkbox"/> (CRY <input type="checkbox"/> LAUGH <input type="checkbox"/> (ENTRANCE <input type="checkbox"/> EXIT <input type="checkbox"/> (LEND <input type="checkbox"/> BORROW <input type="checkbox"/> (LIKE <input type="checkbox"/> DISLIKE <input type="checkbox"/> (HARMONY <input type="checkbox"/> DISCORD <input type="checkbox"/> (ARRIVE <input type="checkbox"/> DEPART <input type="checkbox"/> (ENGAGE <input type="checkbox"/> DISMISS <input type="checkbox"/> (COLLECT <input type="checkbox"/> DISPERSE <input type="checkbox"/> (MODERN <input type="checkbox"/> ANCIENT <input type="checkbox"/>	(ASLEEP <input type="checkbox"/> AWAKE <input type="checkbox"/> (BUSY <input type="checkbox"/> AWAKE <input type="checkbox"/> (TRUE <input type="checkbox"/> FALSE <input type="checkbox"/> (POOR <input type="checkbox"/> RICH <input type="checkbox"/> (ROUGH <input type="checkbox"/> SMOOTH <input type="checkbox"/> (WIDE <input type="checkbox"/> NARROW <input type="checkbox"/> (BLESS <input type="checkbox"/> CURSE <input type="checkbox"/> (ACTIVE <input type="checkbox"/> PASSIVE <input type="checkbox"/> (JUNIOR <input type="checkbox"/> SENIOR <input type="checkbox"/> (SUCCESS <input type="checkbox"/> FAILURE <input type="checkbox"/> (ADVANCE <input type="checkbox"/> RETREAT <input type="checkbox"/> (ATTACK <input type="checkbox"/> DEFEND <input type="checkbox"/> (APPEAR <input type="checkbox"/> DISAPPEAR <input type="checkbox"/> (YOUTH <input type="checkbox"/> AGE <input type="checkbox"/> (FORMER <input type="checkbox"/> LATTER <input type="checkbox"/>
--	--

(SLENDER ☐ STOUT ☐
(HERE ☐ THERE ☐
%

(OFTEN ☐ SELDOM ☐
(DAY ☐ NIGHT ☐

ITALIAN 1

DC6 ** ITALIAN 1 ** ☐
DD6 The correct answer is ☐
DED What is the Italian word for ☐
EOB ? ☐
EOE Tradurre in inglese ☐
E24 ? ☐ ☐ ☐ ☐ ☐

Library

E2A (MOTHER <input type="checkbox"/> MADRE <input type="checkbox"/> (SISTER <input type="checkbox"/> SORELLA <input type="checkbox"/> (BOY <input type="checkbox"/> RAGAZZO <input type="checkbox"/> (FRIEND <input type="checkbox"/> AMIGO <input type="checkbox"/> (RED <input type="checkbox"/> ROSSO <input type="checkbox"/> (GREEN <input type="checkbox"/> VERDE <input type="checkbox"/> (BLACK <input type="checkbox"/> NEGRO <input type="checkbox"/> (HOT <input type="checkbox"/> CALDO <input type="checkbox"/> (DAY <input type="checkbox"/> GIORNO <input type="checkbox"/> (SEA <input type="checkbox"/> MARE <input type="checkbox"/> (OFFICE <input type="checkbox"/> UFFICIO <input type="checkbox"/> (LEFR <input type="checkbox"/> SINISTRA <input type="checkbox"/> (HELP <input type="checkbox"/> AIUTO <input type="checkbox"/> (SAND <input type="checkbox"/> SABBIA <input type="checkbox"/> (ME <input type="checkbox"/> ME <input type="checkbox"/> (THEY <input type="checkbox"/> ESSI <input type="checkbox"/> (THANK YOU <input type="checkbox"/> GRAZIA <input type="checkbox"/> %	(FATHER <input type="checkbox"/> PADRE <input type="checkbox"/> (BROTHER <input type="checkbox"/> FRATELLO <input type="checkbox"/> (GIRL <input type="checkbox"/> RAGAZZA <input type="checkbox"/> (WORK <input type="checkbox"/> LAVORARE <input type="checkbox"/> (BLUE <input type="checkbox"/> TURCHINO <input type="checkbox"/> (YELLOW <input type="checkbox"/> GIALLO <input type="checkbox"/> (WHITE <input type="checkbox"/> BIANCO <input type="checkbox"/> (COLD <input type="checkbox"/> FREDDO <input type="checkbox"/> (NIGHT <input type="checkbox"/> NOTTE <input type="checkbox"/> (COUNTRY <input type="checkbox"/> CAMPAGNA <input type="checkbox"/> (STATION <input type="checkbox"/> STAZIONE <input type="checkbox"/> (RIGHT <input type="checkbox"/> DIRITTO <input type="checkbox"/> (BED <input type="checkbox"/> LETTO <input type="checkbox"/> (YOU <input type="checkbox"/> TU <input type="checkbox"/> (I <input type="checkbox"/> IO <input type="checkbox"/> (PLEASE <input type="checkbox"/> PIACERE <input type="checkbox"/>
---	---

ENGLISH 4

GRAMMAR A

DC6 ** GRAMMAR A ** ☐
DD6 The correct answer is ☐
DED What is the verb of the adjective ☐ ☐ ☐
E12 ? ☐
E15 What is the adjective of the verb ☐ ☐ ☐
E3A ? ☐

Library

E3D (STRONG <input type="checkbox"/> STRENGTHEN <input type="checkbox"/> (NEW <input type="checkbox"/> RENEW <input type="checkbox"/> (SIMPLE <input type="checkbox"/> SIMPLIFY <input type="checkbox"/> (ANGRY <input type="checkbox"/> ANGER <input type="checkbox"/> (HUMBLE <input type="checkbox"/> HUMILIATE <input type="checkbox"/> (STUPID <input type="checkbox"/> STUPIFY <input type="checkbox"/> (LARGE <input type="checkbox"/> ENLARGE <input type="checkbox"/> (CALM <input type="checkbox"/> BECALM <input type="checkbox"/> (LIVELY <input type="checkbox"/> ENLIVEN <input type="checkbox"/> (SAD <input type="checkbox"/> SADDEN <input type="checkbox"/> (HOT <input type="checkbox"/> HEAT <input type="checkbox"/> (LONG <input type="checkbox"/> LENGTHEN <input type="checkbox"/> (CHEAP <input type="checkbox"/> CHEAPEN <input type="checkbox"/>	(VACANT <input type="checkbox"/> VACATE <input type="checkbox"/> (ELECTRIC <input type="checkbox"/> ELECTRIFY <input type="checkbox"/> (FALSE <input type="checkbox"/> FALSIFY <input type="checkbox"/> (PURE <input type="checkbox"/> PURIFY <input type="checkbox"/> (SOLEMN <input type="checkbox"/> SOLEMNISE <input type="checkbox"/> (EQUAL <input type="checkbox"/> EQUALIZED <input type="checkbox"/> (POOR <input type="checkbox"/> IMPROVERISH <input type="checkbox"/> (RICH <input type="checkbox"/> ENRICH <input type="checkbox"/> (FEEBLE <input type="checkbox"/> ENFEEBLE <input type="checkbox"/> (GLAD <input type="checkbox"/> GLADDEN <input type="checkbox"/> (SAFE <input type="checkbox"/> SAVE <input type="checkbox"/> (NOBLE <input type="checkbox"/> ENNOBLE <input type="checkbox"/>
---	--

(CHEAP <input type="checkbox"/> NCHEAPEN <input type="checkbox"/> (SMOOTH <input type="checkbox"/> SMOOTH <input type="checkbox"/> %	(MAD <input type="checkbox"/> MADDEN <input type="checkbox"/> (MODERN <input type="checkbox"/> MODERNIZE <input type="checkbox"/>
--	--

EDUCATIONAL PACKAGE: ADDRESS VARIATIONS

	C5A	C8F	C90	C94	C9D	C9E	CD8
SMILES	06	00	00	F0	08	0E	07
GRAMMAR	3C	20	0A	ED	15	0E	3D
ANTONYMS	07	20	0A	ED	ED	0D	88
GERMAN	2E	20	0A	ED	0D	0E	2F
FRENCH	2E	20	0A	ED	0D	0E	2F
ITALIAN	29	20	0A	ED	0F	0E	2A
GEOGRAPHY	29	20	0A	ED	08	0E	2A

Note at the bottom of the Italian questions the change should be to 9D not 9A as shown.

T.V. GAMES

PROGRAMMABLE - £31.86 inc. VAT COLOUR CARTRIDGE TV GAME

The TV Game can be compared to an audio cassette deck and is programmed to play a multitude of different games in COLOUR, using various play cartridges. At long last a TV game is available which will keep pace with improving technology by allowing you to extend your library of games with the purchase of additional cartridges as new games are developed. Each cartridge contains up to ten different action games and the first cartridge containing ten sports games is included free with the console. Other cartridges are currently available to enable you to play such games as Grand Prix Motor Racing, Super Wipeout and Stunt Rider. Further cartridges are to be released later this year, including Tank Battle, Hunt The Sub, and Target. The console comes complete with two removable joystick player controls to enable you to move in all four directions (up/down/right/left) and built into these joystick controls are ball serve and target fire buttons. Other features include several difficulty option switches, automatic on screen digital scoring and colour coding on scores, hits and balls. Lifelike sounds transmitted through the TV's speaker, simulating the actual game being played. Manufactured by Waddingtons Videomaster and guaranteed for 1 year.



EXTRA CARTRIDGES:

ROAD RACE - £9.58 inc. VAT.
Grand Prix motor racing with gear changes, crash noises, etc.
SUPER WIPEOUT - £9.90 inc. VAT.
10 different games of blasting obstacles off the screen.
STUNT RIDER - £13.13 inc. VAT.
Motorcycle speed trials, jumping obstacles, leaping various rows of up to 24 buses, etc.

6 GAME - COLOURSCORE II - £14.58 inc. VAT


This non-programmable console offers four exciting COLOUR games: Tennis, Football, Squash and Solo as well as an auxiliary socket for connection to "Shooting Star", an electronic rifle, to add two additional Moving Target Shooting Games. Features of the Colourscore II include removable hand controls for movement both up and down the screen, handicapping switch, half speed switch, automatic on screen digital scoring and colour coding.



10 GAME - COLOUR SPORTSWORLD

£24.30 inc. VAT

This non-programmable console offers ten exciting COLOUR games: Tennis, Squash, Hockey, Solo 1, Football, Basketball, Gridball, Solo 2 and two unique built-in target shooting games. Features include two removable joystick player controls to enable you to move in all four directions (up/down/right/left) and built into these joystick controls are ball serve and target fire buttons. Other features include handicapping switch, ball speed switch, automatic on screen digital scoring and colour coding. Realistic hit sounds are transmitted through the TV's speaker. Manufactured by Waddingtons Videomaster and guaranteed for 1 year.



CHESS COMPUTERS

THE WADDINGTONS VIDEOMASTER

STAR CHESS - £59.50 inc. VAT

PLAY CHESS AGAINST YOUR PARTNER

using your own TV to display the board and pieces. Star Chess is a new absorbing TV game for two players, which will interest and excite all ages. The unit plugs into the serial socket of your TV set and displays the board and

pieces in full colour (or black and white) on your TV screen. Based on the moves of chess, it adds even more excitement and interest to the game. For those who have never played, Star Chess is a novel introduction to the classic game of chess. For the experienced chess player, there is a whole new dimension of unpredictability and chance added in the strategy of the game. Not only can pieces be taken in conventional chess type moves, but each piece can also exchange rocket fire with its opponents. The unit comes complete with a free 18V mains adaptor, full instructions and twelve month guarantee.

CHESS CHAMPION 6 - £89.50 inc. VAT

PLAY CHESS AGAINST THE COMPUTER - 6 LEVELS

Chess Champion is a newly developed electronic microcomputer, manufactured by WADDINGTONS VIDEOMASTER. The stylish, compact, portable console can be set to play at six different levels of ability from beginner to expert including "Mate in two" and "Chess by Mail". The computer will only make responses which obey international chess rules. Castling, on passant and promoting a pawn are all included as part of the computer's programme. It is possible to enter any given problem from magazine or newspaper or alternatively establish your own board position and watch the computer react. The positions of all pieces can be verified by using the computer memory recall button. Chess Champion comes complete with a free 9V mains adaptor, full instructions and a twelve month guarantee.

World chess champion ANATOLY KARPOV says:

"This chess computer is a new and interesting partner with remarkable game variations."

CHESS CHALLENGER 7 - £92.50 inc. VAT

Play chess against the computer at 7 different levels. (Similar to Chess Challenger 10 but unit has only 7 levels of play). Price includes unit with wood grained housing, and Stainton design chess pieces. Computer plays black or white and against itself and comes complete with a mains adaptor and 12 months' guarantee.

CHESS CHALLENGER 10 - £154.50 inc. VAT

NEW IMPROVED PROGRAMME - MK 2, APRIL, 1979
Play chess against the computer at 10 different levels. Price includes unit with solid walnut case, deluxe simulated leather and brushed gold foil playing surface & Stainton designed magnetised chess pieces. Comes complete with a mains adaptor and 12 months guarantee.

(Chess Challenger 10 illustrated above)

BORIS - £178.50 inc. VAT

Boris is an advanced chess computer that's programmed for all classic chess moves. He will play Black or White, even himself. He'll even teach you how to play chess and suggests the moves for you when you're unsure of what to do next. Boris can talk to his opponent through his alphanumeric display and will flash different messages during each game to keep you on your toes. Boris will not allow illegal moves, and will allow you to enter problems or set up your own board positions. Boris comes in hand crafted, solid walnut case with chess pieces and board. Comes complete with a mains adaptor and 12 months guarantee.



FOR FREE BROCHURES - SEND S.A.E.

For free illustrated brochures and reviews on T.V. and chess games please send a stamped, addressed envelope and state which particular games you require information on. Callers welcome at our shop in Welling - demonstrations daily - Open from 9am-5.30pm Mon.-Sat. (9am-1pm Wed.)

To order by telephone please quote your name, address and Access/Barclaycard number. VAT is included in all prices above - Postage & Packing FREE.
AJD DIRECT SUPPLIES LIMITED, Dept. HE3
102 Bellegrove Road, Welling, Kent DA16 3QD
Telephone: 01-303 9146 (Day). 01-850 8652 (Evenings)

TRS 80 SOFTWARE

from the leaders in innovative software

We were first for the TRS 80 with Re number Basic

We were first with software Level 1 in Level II

We were first with the Howe Monitors 1, 2 and 3.

We were first with the Library 100 ...

And we are going to go on being first
SEND SAE FOR LIST

A. J. HARDING



28 Collington Ave.,
Bexhill, E. Sussex.
Tel. (0424) 220391



"COMPUTA GAZETTE"

The Computer Magazine

Published on Cassette in computer dump format

Presently for Nascom 1 users only

- * Comes complete with Text Handling program giving excellent control of pages on VDU
- * Requires B-BUG and 8K Nasco RAM.
- * Programs in B-BUG format at present, but BASIC version is planned - please enquire.
- * Bi-monthly publication from June 79 includes news, reviews and ready to run programs.

COMPUTA GAZETTE'S Text Processor
available separately on cassette £10
(inc. p & p)
(FREE with Gazette)

Order your Computa Gazette now directly from:

**THE SOFTWARE PUBLISHING
COMPANY, 8A CHURCH SIDE,
MANSFIELD, NOTTS.
Telephone 0623 29237**

Annual subscription for six bi-monthly editions:
£12.50 (UK)
Orders from European Continent add £5.



BITS, BYTES & BAUDS

This month we take a look at mass storage memory systems

At this point in our series, we have seen how a computer works, how it addresses memory, and how it can send data to and receive data from a peripheral. The program (or set of instructions for the computer to follow) must reside in the memory that is readily available to the computer so that it has access to all it needs, simply by sending an address on the address lines and receiving instructions on the data lines. If the computer in our example were to be doing a constant, repetitive, function such as controlling the traffic lights at an intersection, then it would be permanently burned into a ROM (Read-only-memory). This is the simplest form of a computer system, and its description ends here.

Of more interest to us is the general purpose counter, such as may be found in an office, for example. This type of computer may have more than a hundred different programs for various day-to-day jobs, as well as dozens more that are executed only once a week, once a month, or less often. These programs are not all needed at the same time, and so need not all be stored in the main memory. Main memory is very expensive when compared to office memory, such as paper tape, cassettes, and discs, and so shrewd system designers store as many programs offline as possible to reduce main memory needs.

Online-Offline Storage

To get better ideas of the difference between outline and offline storage, let's compare our computer to a theatre. The actors who are currently performing occupy the stage, which is a very elaborate platform, designed to be in full view of the audience, and having lots of expensive accessories, such as lights, microphones, scenery etc, to make it a very effective place for the actors to work. When the actors are not acting, they leave the stage and wait in the wings. The wings on the stage are very crowded places where space is at a premium, and so you will only find them there immediately before and after their performance on the stage. Beyond the wings you will find all sorts of space reserved for dressing rooms, etc, where actors can go to relax. They know that when they are in these rooms, they will get plenty of notice before they are needed on the stage.

In a computer, the stage is the main memory, which is sometimes referred to as executable memory, because programs must be in this type of memory to be executed. It is very expensive, like the stage, because it is very fast, and programs are only put here when they are needed. The wings of the stage represent any form of fast-access device, such as floppy disk, where data can be stored and retrieved very quickly. Data and sub-programs that are used constantly by a main program in memory are stored on such a device, because during the course of a program's execution they may be brought into memory and taken out again as required by the program.

The dressing rooms of our computer are devices such as a cassette system where we can store programs until their turn comes to go into the main memory. Changing of main programs happens relatively infrequently, and lots of Notice can be given, so the delays in getting programs into

memory aren't very serious.

Now that we have decided that it's smart to store programs and data offline when not using them, let's look into the multitude of devices that can be used for storage.

Old Faithful — The Paper Tape

For the small system owner just building his system, an obvious starting point is a teletype machine (TTY). TTYS sometimes have a punch and reader added, capable of storing and retrieving data by punching them on paper tape. For computer purposes, an 8 level machine is needed, such as the Teletype Corporation model ASR33 or ASR35. (ASR stands for Automatic Send-Receive, meaning that it is a basic unit with a reader-punch added, as opposed to a KSR which simply means Keyboard Send-Receive — i.e. no punch/reader).

In order to store all programs in a manner that can be readily reloaded into the computer, a standard must be established to define what each item on the tape means. Each part of the memory, as it is dumped on to punched tape, can be considered as a block. These blocks of memory be any convenient length, and are stored as individual records on the tape. Every byte of data, when sent to the teletype machine, will cause the eight hole-punches to pierce the paper or not, depending on whether the corresponding bit is 1 (hole) or a 0 (no hole). The paper moves forward by one byte, or frame has been punched, and at the same time the teletype machine is receiving the next character for punching. In this way, the result of sending a complete block memory, one byte at a time, will be a long tape with holes corresponding to the bits stored in memory as ones.

Holes Are Not Enough

However, just to store the contents of memory on to paper tape does not constitute a complete record. Generally-accepted practice dictates that prior to starting a dump of some memory, the computer shall send the following to the teletype: (Fig. 1).

- a) A leader consisting of several frames (usually ten or more) of blank tape. This gives the user space to write on the tape describing the program, and also provides an alert to the reader (when the program is loaded into the computer again) that a new block follows.
- b) One or two frames with a code that indicates that a new record is about to start, and sometimes, optionally, the type of record (data or program).
- c) Two frames which specify the address where this program starts in memory.
- d) Two frames that specify the address to which control should be given at the completion of loading if this is a self-starting program.
- e) One or two frames which specify the length of this block of data, so that the loader knows when to expect the end of the data.
- f) A variable number of frames containing the actual data taken from memory, beginning at the address specified in part (C).
- g) A special frame or frames that contain a checksum,

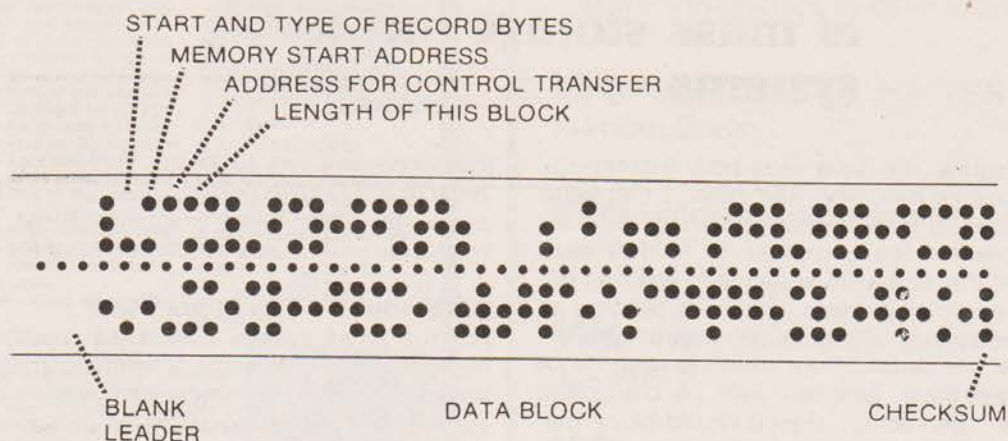


Fig. 1. Data and preainble/postainble layout on paper tape

compiled from a process which is affected by every byte of data on the tape. This byte is calculated and stored as the computer is dumping the program. When the computer reads in the program again, it makes the same calculation as it made before it dumped the data, except that this time it is basing the calculation on the data received from the tape. After the computer has made this calculation on all information read in, it then compares the answer it now gets to the answer that is stored as the last frame(s) on the tape. If the two answers disagree, then the operator is warned that an error occurred during the reading back of the last block, and that he should retry that block.

h) Several rubouts, or all-holes-punched frames to indicate an end-of-block.

A long program would be broken down into many smaller blocks, so that if an error occurs during a single block, the block itself would be retried by the operator until it is received correctly, instead of having to wait until the entire program has read in before reloading it all.

The above program tape description does not necessarily represent an actual format used by any particular manufacturer but rather a general idea of how most of them operate.

This method is similar to the main form of program loading in the early days of small minicomputer and microcomputer systems. It is largely obsolete now in the minicomputer field, except for small dedicated systems such as industrial controllers whose program is changed very rarely. It is still used, however, as a last-ditch method of getting diagnostic programs into a computer system when a field engineer cannot get a major system device, such as a disc, to load programs. For this reason, most microcomputer manufacturers still ship diagnostics on paper tape with their products.

But Everybody Has A Cassette

A natural development from paper tape was the cassette, although this method has failed to fulfil the expectations of commercial users, since cassette transports designed for home entertainment use are not accurate enough for high-speed data use, and the development of purely digital systems was largely overshadowed by IBM's introduction of the floppy disc. A cassette can be viewed in exactly the

same manner as paper tape, including the way that blocks are formatted as described above. The only difference is that instead of parallel holes being used to represent the ones and zeros, tones are used in pure serial fashion on the cassette, i.e. one after the other. The simplest method of recording data on a cassette would be to send the data to an asynchronous line, just as if it were going to be punched on a teletype machine, but replacing the teletype machine with a modem and recording the tones from the modem on tape. This method is rarely used, more modern and efficient methods such as CUTS and Kansas City standards having been developed by computer hobbyists for better reliability.

One major disadvantage of both the paper tape and cassette systems is that they are both sequential access systems. This means that if you store fifty programs, and later want to retrieve the fiftieth one, you have to read through the preceding forty-nine programs until you get the one you want. With paper tape, this headache is almost eliminated by putting every program on a separate piece of paper tape, but this has the advantage of requiring operator intervention to find the correct tape and load it into the reader. Cassette systems can sometimes have a better approach to this problem. This type of system can turn off the tones completely for a distance between the data blocks, so that there is a quiet spot on the tape. The program puts a program name or identifier at the beginning of every block. (see Fig 2) When the cassette controller is instructed to find a particular block number or program name, it reads the first few frames of a block, checks to see if the identifier matches that which it is looking for, and if so, reads the whole block. If it does not match, it then fast-forwards the tape until another silent gap is detected, at which time the controller slows down the tape to read the first few frames, and so on until the whole program is loaded.

Enter The Floppy Disc

When IBM introduced the floppy disc, it was designed to be a quick, reliable method of reloading the microprogram of their big mainframes, quickly and effectively after a power failure or other cause of loss of control memory. As a result of the availability of the floppy disc it is not worth the trouble and expense for anyone to develop a general-

BITS, BYTES & BAUDS

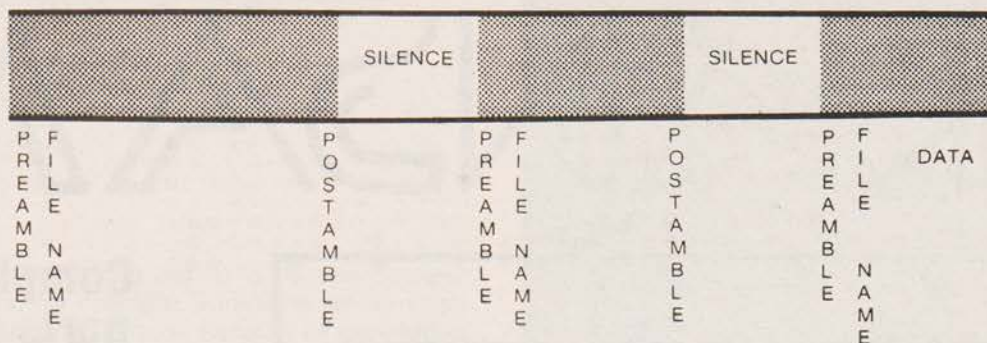


Fig. 2. Data files on a cassette

purpose, commercial-grade cassette system, since cassettes are inherently unsuited for data purposes and a floppy disc system is only marginally more expensive. Also, the floppy disc wins hands down over all sequential-access devices, because it is a random-access device.

Random access simply means that any part of a file can be accessed without having to read all data before it.

The floppy disc is made up of a flexible, circular piece of mylar, about the size of a 45 rpm gramophone record. (see Fig. 3) One side of the "diskette" is covered with metal oxide, just as is one side of a cassette tape. On this surface, all data are recorded, in the following manner:

As the diskette spins around at 360 rpm, the head can move in and out along a line joining the centre of the hub of the diskette and a fixed point on the perimeter of the diskette. The actual diskette is enclosed in an envelope to protect it, and a slot is cut in the envelope along the line of travel of the magnetic recording head, on the side of the diskette containing the oxide. The inside of this envelope contains a felt-like material that cleans the diskette and traps any foreign particles as the diskette spins.

The head can be moved in and out over the surface of the diskette in increments of 1/48 inch. Every 1/48 inch is defined as being a track, starting at a predetermined distance in from the edge of the diskette. Each track forms a circle, centred on the centre of the disc. Thus all data are written on the 77 concentric tracks.

At a specified spot on the mylar, a hole is punched so that light can pass through it. This point is defined as being the start point of all the tracks. As the disc spins past this point, no matter which track the head is over, it will be at the beginning of that track.

Each track is further divided into 26 sectors. In some diskettes, a hole is punched in the mylar to signal the beginning of each sector. These are known as hard-sectored diskettes, since the hardware (photocell) actually gives a signal to the interface to tell it when a new sector is starting. The IBM 3740 standard diskette is a so-called soft-sectored diskette, since the start position of each sector is determined by a calculation based on the time interval after the main index hole has passed.

At the beginning of each sector are written a series of identifying marks telling the controller the track and sector is found. It compares these when it has read

them with where it has calculated the head to be and sees if there has been an error. Also found at this point at the beginning of each sector is a series of check marks specially encoded to test that the head is decoding the magnetic flux changes properly. Following the above (called preamble) there are 128 bytes of data, followed by some more checking marks called postamble.

Thus the floppy disc controller can randomly retrieve any 128 byte record from the 2002 such blocks on the diskette. All the user has to do is specify the track and sector number where he stored the data, and he can retrieve it years later.

In most actual operating systems, the track and sector numbers are not used by the system user, but files are referenced by a name that is given to them at creation. At the beginning of the diskette there is a cross-reference file which contains the file names and their corresponding track and sector numbers. This file is known as the directory, and is manipulated by the programs of the manufacturer-supplied operating system software to store and later retrieve all files required by the user.

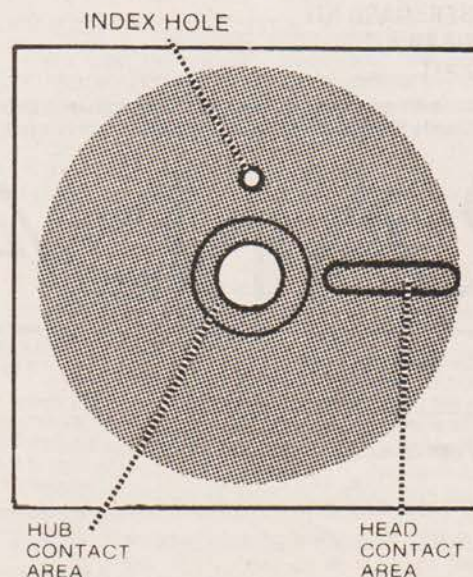


Fig. 3. IBM 3740 Diskette

The exciting new
TRITON
 Personal Computer
 exclusively from:

TRANSAM

**Complete kit of
 parts available
 only £286 (+ VAT)**



Basic in Rom: a powerful 2k Tiny basic resident on board, makes Triton unique, easy to use and versatile.

Graphics: 64 Graphic characters as well as full alpha numerics.

Single Board: Holds up to 8k of memory, 4k RAM and 4k ROM, supplied with 3k ROM and 2k RAM.

Memory Mapping: 2 mode VDU, I/O or memory mapped for animated graphics.

Cassette Interface: crystal controlled Modem tape I/O with auto start/stop + "named" file search.

UHF TV Interface: On board uhf modulator, plugs into TV aerial socket.

Comes Complete with keyboard, case, power supply, thro-hole plated quality P.C.B. full documentation powerful 1k monitor & 2k tiny basic plus all components incl. ic sockets. Note TV set & cassette not included.

EXPANSION: EXPAND YOUR TRITON SIMPLY AND EASILY WITH OUT NEW 8-SLOT MOTHERBOARD — COMPLETE WITH ITS OWN P.S.U. TAKES 8 PLUG IN EUROCARDS. PLUG IN 8K RAM PLUS 8K EPROM CARDS — NOW AVAILABLE.

EXPANSION MOTHERBOARD KIT £50
 8k STATIC RAM BOARD KIT £97
 8k EPROM BOARD KIT £97

Full details available in our brand new 1979 computer products catalogue — so order your copy now! Don't forget, VAT is extra at 8%. User club £4 per annum.

All components can be bought separately and eleven packs can be purchased on an easy-to-buy scheme. See catalogue.

TRANSAM

Triton Humbug V5.1: Runs in 4k on main board. Extended basic includes peek, poke, read, write, call and edit. New 1.5k monitor has software mod for printer plus much more. You return three eeproms from Triton and we supply four new ones, fully programmed and documented — **£25 + VAT.**

I am interested in the Triton

Name _____

Address (please print) _____

To TRANSAM COMPONENTS LTD
 12 CHAPEL STREET, NW1

Please send me the following

1. A copy of your latest catalogue. I enclose 30p + S.A.E. 9" x 7" ☐
2. A copy of the Triton Manual I enclose £5 + 70p P & P. ☐
3. A complete kit of parts for Triton Computer. £286 + VAT + £4 P & P. ☐
4. A Printed Circuit Board £50 + VAT & £1 P & P. ☐

CT2

TOTAL ENCLOSED £

Cheque, Money Order, etc.



BARCLAYCARD ACCESS.
 VISA & MASTER CHARGE
 ARE WELCOME SEND
 YOUR CARD NUMBER WITH
 ORDER



For details send £1 and SAE.

TRANSAM


**TRANSAM COMPONENTS LTD.
 12 CHAPEL STREET
 LONDON, NW1 TEL: 402 8137**

NEXT TO EDGWARE ROAD TUBE STATION MET. LINE
 TRITON COMPUTER IS THE TRADE MARK OF
 TRANSAM COMPONENTS LTD

A random number generator for your games programs


Many games played with the aid of a microprocessor use random numbers, for example, variations on common disc games. The processor is quite capable of generating numbers in a time which the average player would not notice; it can also take a fair proportion of a small systems memory to do it, thus reducing the potential complexity of the games.

The circuit shown here can help reduce the software overhead at the expense of a few chips. It relies for its randomness on the fact that your average micro is quite slow in accessing data compared with the 30 MHz or so of the clock used for the pseudo-random number generator (PRaNG) shown in the circuit. This, coupled with the asynchronous nature of the two clocks involved, ensure that as far as the processor is concerned the numbers are random. To confuse the micro still further the outputs of the counter relative to the data bus have been randomised! In order to try out the PRaNG, a simple game was devised whereby the infernal machine 'thought' of a number and dared you to guess what it was. Refinements were added to give varying numbers of tries at beating it, (6 or 7 is easy — try 4!), and to make it more easily played by the younger members of the family some prompts were added. Thus came about the 'Guess My Number' program!

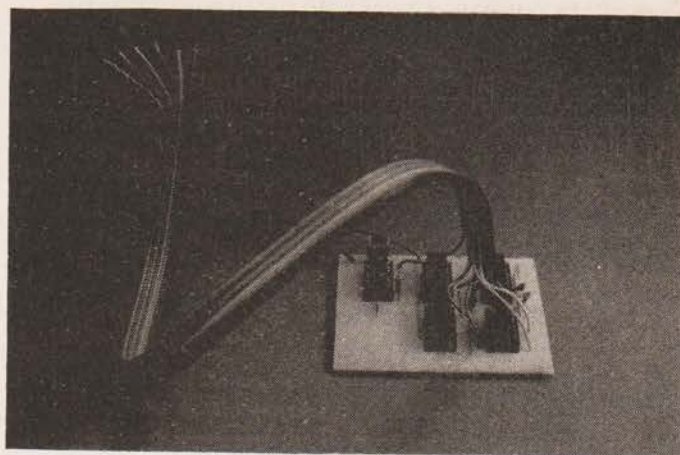

The program as given takes about 250 bytes, with some 250 more being taken up with prompting text. The text can be cut down, but not by much. The program is written for Z80 machines, but can fairly easily be re-written for others, as the actual program is fairly simple. Since the input and output programs vary between different machines and monitors these sub-routines have not been included — add your own addresses where applicable. Some systems may also have some of the other sub-routines available, and the DELETE S/R may need to be changed slightly.

Apologies for the odd listing — blame no assembler as 'twas me. One thousand bytes of RAM does not support an assembler these days! The format of the output was designed for use with a Thomson-CSF type VDU, hence the 'Erase Line' commands in the TEXT listing. I must now think of some more number games to justify building the PRaNG.

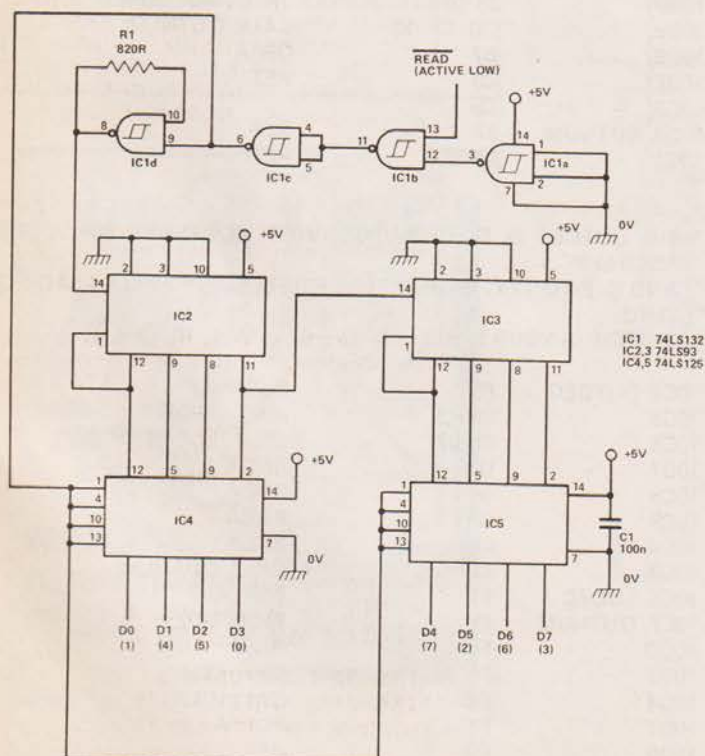

HOW IT WORKS

Prang is assembled from one quad gate package, two binary counters and two quad tri-state buffers. The outputs of these devices can drive TTL in the normal way but also feature a control input which allows the outputs to be switched off so that less than one micro-amp of current flows through them and the device becomes 'invisible' to the data bus. Whilst low-power schottky TTL cannot be considered state-of-the-art the chosen devices combine economy and efficiency in a simple yet effective circuit.

The inputs of IC1a are tied low providing a high level to one input of IC1b whose output is low when the READ input is high. This signal, inverted by IC1c controls the tri-state buffers and the clock generator IC1d which oscillates at about 30 MHz. It is important to use a schmitt device here, a 7400 will not do. The output from IC1d drives the cascaded binary counters IC2 and IC3 which will cycle until the clock is stopped by taking the READ input low, enabling the outputs of IC4 and IC5. When the READ input is taken high again, the outputs of IC4 and IC5 will revert to the tri-state 'off' condition and the clock will restart generating new data ready to be accessed.

- * GUESS MY NUMBER: A GUESSING GAME FOR USE WITH
- * PSEUDO RANDOM NUMBER GENERATOR ON PORT 02H
- * DESIGNED TO USE YOUR INPUT & OUTPUT S/R'S
- * 'INCH' RETURNS CHARACTER IN 'A'
- * 'OUTCH' EXPECTS AN O/P CHARACTER IN 'A'

```

1000 START      11 00 00      ORG 1000
1003            21 00 11      LD DE, 0
1006            CD EB 10      CALL OUTS
1009 NEWGAM     21 28 11      LD HL, TRIES
100C            CD EB 10      CALL OUTS
100F            DB 02         IN A, PRNG
*
1011            3C           INC A
1012            27           DAA
1013            47           LD B, A
1014            CD 76 10      CALL INDEC
1017            4F           LD C, A
1018            AF           XOP A
1019            00           NOP
101A            00           NOP
101B NEXT       B7           OR A
101C            3C           INC A
101D            27           DAA
101E            F5           PUSH AF
101F            21 4B 11      LD HL, NUMBER
1022            CD EB 10      CALL OUTS
1025            CD 76 10      CALL INDEC
1028            D8           CP B
1029            20 33         JR NZ, NOTRIT
102B            7A           LD A, D
102C            3C           INC A
102D            27           DAA
102D D          57           LD D, A
102F            21 64 11      LD HL, YES
1032            CD EB 10      CALL OUTS
1035            F1           POP AF
1036            CD C2 10      CALL OUTDEC
1039 END        CD EB 10      CALL OUTS
103C            78           LD A, B
103D            CD C2 10      CALL OUTDEC
1040            21 8C 11      LD HL, SCORE
1043            CD EB 10      CALL OUTS
1046            7A           LD A, D
1047            CD C2 10      CALL OUTDEC
104A            CD EB 10      CALL OUTS
104D            7B           LD A, E
104E            CD C2 10      CALL OUTDEC
1051            CD EB 10      CALL OUTS
1054            CD XX XX      CALL INCH
1057            FE 4E         CP 'N'
1059            20 AE         JR NZ, NEWGAM
105B            C3 XX XX      JP MONITOR
105E NOTRIT     21 BE 11      LD HL, SMALL
1061            38 03         JR C, OUTMES
1063            21 CB 11      LD HL, BIG
1066 OUTMES     CD EB 10      CALL OUTS
1069            F1           POP AF
106A            B9           CP C
106B            20 AE         JR NZ, NEXT
106D            7B           LD A, E
106E            3C           INC A
106F            27           DAA
1070            5F           LD E, A
1071            21 D6 11      LD HL, IWIN
1074            18 C3         JR END

```

- * S/R INDEC: INPUT ONE OR TWO DECIMAL NUMERALS TO 'A'
- * CONFIRM ENTRY WITH 'CR' : IF YOU CHANGE YOUR MIND, 'DEL' WORKS

```

1076 INDEC      C5           PUSH BC
1077 WRONG 1    CD XX XX      CALL INCH

```

```

107A            CD B3 10      CALL ASCNUM
107D            38 F8         JR C, WRONG 1
107F            47           LD B, A
1080 WRONG 2    CD XX XX      CALL INCH
1083            FE 0D         CP 'CR'
*
1085            20 03         JR NZ, NOTCR
1087            78           LD A, B
1088            C1           POP BC
1089            C9           RET
108A MOTCR      FE 7F         CP 'DEL'
108C            20 05         JR NZ, OK1
108E            CD D9 10      CALL DELETE
1091            18 E4         JR WRONG 1
1093 OK1        CD B3 10      CALL ASCNUM
1096            38 E8         JR C, WRONG 2
1098            4F           LD C, A
1099            78           LD A, B
109A            OF           RRCA
109B            OF           RRCA
109C            OF           RRCA
109D            OF           RRCA
109E            B1           OR C
109F            4F           LD C, A
10A0 WRONG 3    CD XX XX      CALL INCH
10A3            FE 7F         CP 'DEL'
10A5            20 05         JR NZ, OK2
10A7            CD D9 10      CALL DELETE
10AA            18 D4         JR WRONG 2
10AC OK2        FE 0D         CP 'CR'
10AE            20 FO         JR NZ, WRONG 3
10B0            79           LD A, c
10B1            C1           POP BC
10B2            C9           RET

```

- * S/R ASCNUM: CONVERT CONTENTS OF 'A' TO BCD IS ASCII CODE IS VALID

- * IF IT'S NOT, CARRY FLAG IS SET

- * IF CORRECT, NUMBER IS RE-CONVERTED TO ASCII & O/P TO TTY

```

10B3 ASCNUM     FE 3A         CP 3AH
10B5            30 09         JR NC, NOTNUM
10B7            D6 30         SUB 30H
10B9            38 05         JR C, NOTNUM
10BB            CD CF 10      CALL OUTNUM
10BE            B7           OR A
10BF            C9           RET
10C0            C9
10C0 NOTNUM     37           SCF
10C1            C9           RET

```

- * S/R OUTDEC & OUTNUM: CONVERT CONTENTS OF 'A' TO ASCII (0-9)

- * AND O/P TO TTY, HIGH NIBBLE FIRST: SUPPRESSES LEADING ZERO

- * 'OUTCH' IS YOUR S/R!!

```

10C2 OUTDEC     F5           PUSH AF
10C3            E6 FO         AND FOH
10C5            28 07         JR Z, LODEC
10C7            OF           RRCA
10C8            OF           RRCA
10C9            OF           RRCA
10CA            OF           RRCA
10CB            CD CF 10      CALL OUTNUM
10CE LODEC      F1           POP AF
10CF OUTNUM     F5           PUSH AF
10D0            E6 OF         AND OFH
10D2            F6 30         OR 30H
10D4            CD XX XX      CALL OUTCH
10D7            F1           POP AF
10D8            C9           RET

```


- * S/R DELETE: REMOVE CHARACTER FROM VDU SCREEN (STAND ALONE TYPE)
- * AND REPOSITION CURSOR OVER DELETED CHARACTER
- * FOR OTHER TYPES OF VDU, ALTER ACCORDINGLY!
- * S/R OUTCH IS YOURS!

10D9 DELETE	F5	PUSH AF
10DA	3E 08	LD A, 'BS'
10DC	CD XX XX	CALL OUTCH
10DF	3E 20	LD A, 'SP'
10E1	CD XX XX	CALL OUTCH
10E4	3E 08	LD A, 'BS'
10E6	CD XX XX	CALL OUTCH
10E9	F1	POP AF
10EA	C9	RET

- * S/R OUTS: OUTPUT A N ASCII STRING, START ADDRESS-1 IN 'HL'
- 0 STRING TERMINATOR IS 'ESC' (1BH) OR ANY CHARACTER YOU DESIGNATE!

10EB	OUTS	
10EB OUTS	23	INC HL
10EC	7E	LD A, (HL)
10ED	PE 1B	CP 'DSC'
10EP	C8	RET Z
10F0	CD XX XX	CALL OUTCH

10F3

18 F6

JR OUTS



- * TEXT STRINGS: ITEMS SHOWN THUS:- (CR) ARE CONTROL CHARACTERS
- * (CR) CARRIAGE RETURN OD HEX
- * (LF) LINE FEED 0A HEX
- % (ERL) ERASE LINE (SUB) 1A HEX USED ON THOMSON-CSF TYPE VDU'S
- * (ESC) STRING TERMINATOR 1B OR ANY OTHER OF YOUR CHOICE!
- * SPACES ARE SHOWN BY UNDERBAR THUS:-

ORG 1100

1100	(ESC) GUESS\$MY\$NUMBER;\$IT'S\$BETWEEN\$0\$AND\$99.
	(ESC)
1129	(CR) (LF) (ERL) HWOW\$MANY\$TRIES\$WOULD\$YOU\$LIKE?\$
	(ESC)
114C	(CR) (LF) (ERL) WHAT\$IS\$YOUR\$NUMBER?\$ (ESC)
1165	(CR) (LF) (ERL) CLEVER!\$IT\$TOOK\$YOU\$(ESC)
117D	\$GOES\$TO\$GUESS\$(ESC)
118D	(CR) (LF) (ERL) THHE\$SCORE\$IS\$YOU\$(ESC)
11A2	\$ME\$(ESC)
11A7	(CR) (LF) (ERL) PLAY\$ANOTHER?\$Y\$OR\$NO (ESC)
11BF	\$TOO\$SMALL; (ESC)
11CC	\$TOO\$BIG; (ESC)
11D7	(CR) (LF) (ERL)\$WIN!!\$IT\$WAS\$(ESC)

PARTS LIST

C1	100 n
R1	820 R
IC1	74LS132
IC2,3	74LS93
IC4,5	74LS125

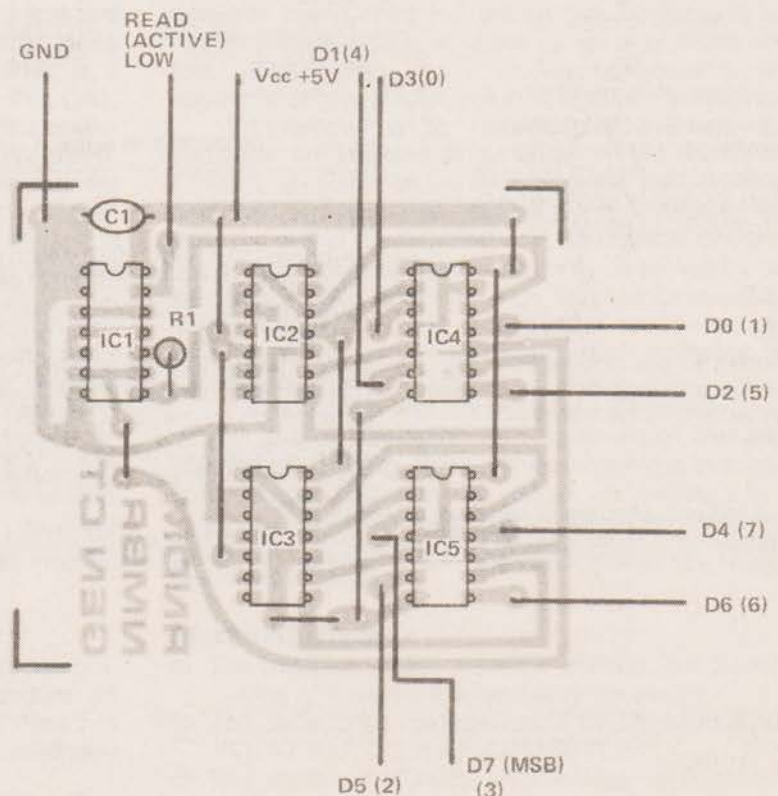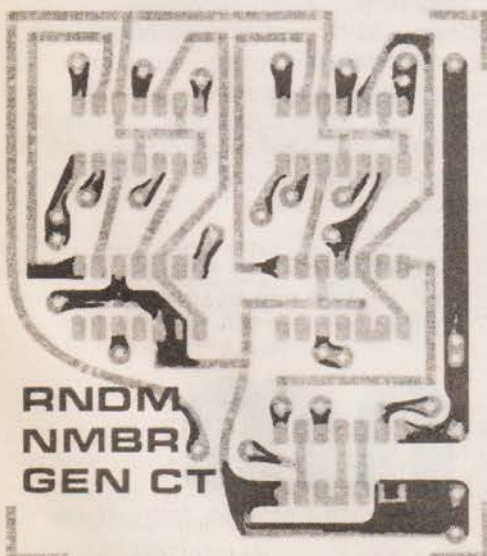

If you can buy more on one board for under £300~ buy us one too!

In about the same area as this advertisement, we have designed a microcomputer with 20K of addressable memory ON-BOARD. With Kansas City standard cassette interface ON-BOARD. With TV/monitor interface ON-BOARD. With control decoding ON-BOARD. With all bus lines fully buffered ON-BOARD.

We call this microcomputer **Nascom-2**. And for under £300 this is what it has:

Microprocessor

Z80A. 8 bit CPU. This will run at 4 MHz but is selectable between 1/2/4 MHz.

This CPU has now been generally accepted as the most powerful, 8 bit processor on the market.

The software library for the Z80, with its base around the 8080, has rapidly expanded with the increasing use of its more powerful instruction set.

Hardware

12" x 8" Card

All bus lines are to the Nasbus specification.

All bus lines are fully buffered.

PSU +12v, +5v, -12v, -5v.

Memory

On-board, addressable memory:-

2K Monitor - Nas-Sys I (2K ROM)

1K Video RAM (MK4118)

1K Work space/User RAM (MK4118)

8K Microsoft Basic (MK36000 ROM)

8K Static RAM/2708 EPROM



INTERFACE

Keyboard

New expanded 57 key Licon solid state keyboard especially built for Nascom. Uses standard Nascom, monitor controlled, decoding.

T.V.

The 1v peak to peak video signal can drive a monitor directly and is also fed to the on-board modulator to drive the domestic TV.

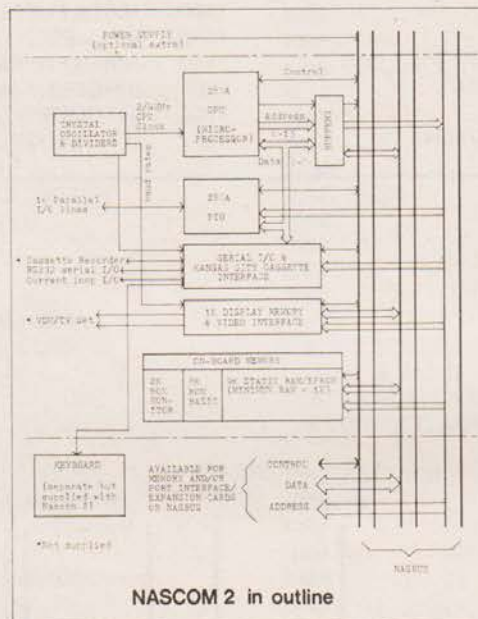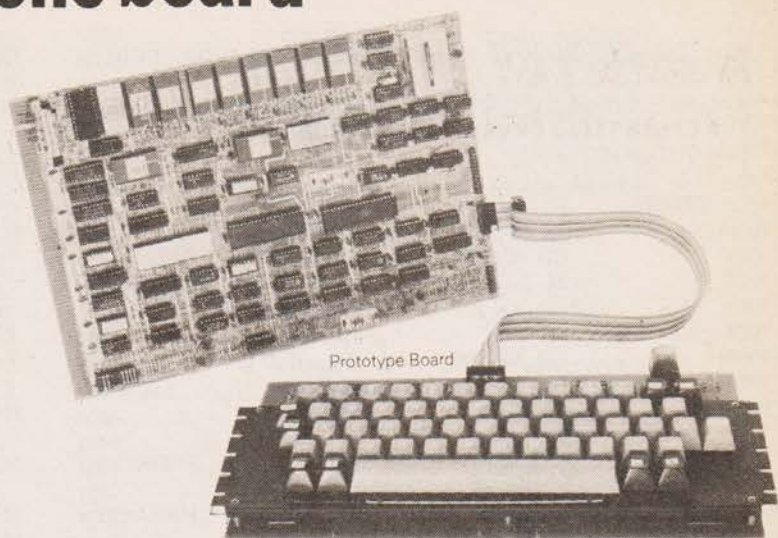

I/O

On-board UART (Int.6402) which provides serial handling for the on-board cassette interface or the RS232/20mA teletype interface.

The cassette interface is Kansas City standard at either 300 or 1200 baud. This is a link option on the NASCOM-2.

The RS232 and 20mA loop connector will interface directly into any standard teletype.

The input and output sides of the UART are independently switchable between any of

the options - i.e. it is possible to use input on the cassette and output on the printer.

PIO

There is also a totally uncommitted Parallel I/O (MK3881) giving 16, programmable, I/O lines. These are addressable as 2 x 8 bit ports with complete handshake controls.

On-board Decoding

The NASCOM-2 makes extensive use of ROMs for on-board control decoding. This reduces the chip count and allows easy changes for specialised industrial use of the board.

Link options are on-board to allow the Reset control to be reassigned to an address other than zero.

Character Generators

The 1K video RAM drives a 2K ROM character generator providing the standard ASCII character set with some additions, 128 characters in all. There is also a socket for an optional graphics ROM on-board.

The PCB is, of course, of industrial standard, through hole plated, masked and screen printed.

Documentation

Full construction article is provided for those who buy a kit and an extensive software manual is provided for the monitor and Basic.

We think no other board has quite so much on it for £295 (plus 8% VAT). If you find a board that has more, buy one for us too!



Nascom Microcomputers

121 High Street Berkhamsted Herts.

(04427) 74343

D2 PROGRAMMING

A series of articles on programming techniques for the Motorola D2

The PROGRAMS are intended to guide the poor student through the mysteries of machine language programming using the MOTOROLA MEK D2 evaluation kit. The PROGRAMS commence at elementary (perhaps trivial) level and progress slowly towards the impossible. The format of the programs include the ASSEMBLY LANGUAGE equivalent. At first sight, this would appear to be a waste of time because the D2 kit can only recognise programs written in hexadecimal machine code. Nevertheless, it is a good habit to write programs in ASSEMBLY LANGUAGE first because of the superior mnemonic aids provided by the language. It also helps in tracing bugs.

It must be pointed out however that full ASSEMBLY tricks are not included. For example, the operands are given in hexadecimal absolute address instead of the usual symbolic form in order that programs appear free of the clutter resulting from DECLARATION lines at the top. It is unfortunate that symbolic addresses, although intended to ease the burden of programming, often confuse the student (and the writer) by the inclusion of this mass of necessary jargon before the actual program begins.

Hardware Needs

The programs that refer to PIA input and output assume that the D2 kit has been extended to include lamps and switches. Although simple switches are normally good enough for the sixteen data terminals of the PIA, it is advisable to employ de-bouncing flip-flops on the CA1, CA2, CB1 and CB2 switches. If this is not done, the operator must expect that active HIGH and active LOW transitions of the switches may give undefined results; for example, if the control register is set, programmed to cause interrupt when CA1 goes from HIGH to LOW, then it is quite on the cards that a LOW to HIGH transition will also cause interrupt due to the switch trembling.

The first line in all programs is LDS 00FF which sets the stack pointer at the last address (00FF) in the users RAM. Unless this is done, the executive program in ROM called JBUG will tend to corrupt the programs. There is no rule that states that the stack pointer MUST be set to address 00FF but it must be set somewhere so the safest place is in the last address. If however, your income entitles you to belong to the well-spiced set, then you have probably bought another 256 bytes of RAM in which case YOUR last address is elevated to 01FF.

Manually Assisted

The literature supplied with the D2 Kit includes a comprehensive PROGRAMMING MANUAL which devotes an entire page to each instruction. Unfortunately, it does not attempt to explain how to program — it is assumed you already know this.

It is unfortunate that standard works on the subject tend to give example programs which, far from helping the beginner, only demoralise him or her. Rather than wade

through masses of preliminary work, the best way to learn programming is to study carefully every line of the following examples and then rewrite it with some slight variation, perhaps a change of address or relocate it in another block of memory.

Try to develop a critical attitude towards them and try to save the odd byte by a better choice from the instruction repertoire. If the program does something to the PIA A-side, modify it to the B side or vice versa. If any line used EXTENDED addressing when the more economical DIRECT addressing could have been used then modify it — but remember that if the program used BRANCH instructions, the RELATIVE address may require changing.

As early as possible, try to write your own programs but keep them simple because frustration in the early stages could lead to a violent physical attack upon the keyboard. Watch out for finger trouble at the keyboard and keep a watchful eye on that "Prompt" bar on the left hand display digit. This MUST be showing before any fresh execution run or change of JBUG function. When in doubt, press E and start again is a good rule of thumb.

When entering a program don't forget to press the M button after keying in the first address; it is rather annoying after entering about thirty or more byte of code to discover that none of it has gone in! Be very methodical when entering any program. Don't rush; pause after EVERY instruction has been entered and check the address digits on the display correspond with what the program declares they should be.

High To Low Level

This simple little trick will ensure you don't miss the odd byte out; remember that a missed byte in the first few instructions means that almost the entire program has to be re-entered. If you have been used to the luxury of BASIC, whereby the missed instruction can be slipped in at the bottom, these pitfalls will come as an unpleasant shock. In fact, those who arrive at microprocessors after an apprenticeship in BASIC are in danger of disillusionment.

Programming in hexadecimal machine language demands an intimate knowledge of the INSTRUCTION CODES, an ability to think at machine level (which is very primitive) and above all, patience and fortitude. Nevertheless, the skill is a rewarding one, the overall understanding of computerised intelligence can only be gained by using the language of the creature; high level languages, although ideally suited for using a computer will never allow the user to see through the mountain of software between him and the machine.

He is conversing through an interpreter and as in normal life, a translation can never equal the original in subtlety of phrasing. Because the forgoing is to some extent controversial and may be taken as disparaging to the exponents of high-level language, it may be useful to set out the relative advantage and disadvantages of machine and high-level language.

Machine Language

- The machine codes must be understood. Some knowledge of the machine hardware necessary
- The code, once understood, is ONLY APPLICABLE TO THAT PARTICULAR COMPUTER.
- The various ADDRESSING modes applicable to each instruction code must be understood.
- Every single step of a complex program must be set out in tortuous detail.

- e) Calculating the number of bytes to jump back or forward in BRANCH instructions is time consuming and error prone.
- f) The final program can be executed immediately and (providing it is written sensibly) is efficient, fast and will be economic in terms of memory capacity.

High-Level Language

- a) Easy to learn.
- b) Knowledge of the machine codes and the various addressing modes is not required.
- c) Knowledge of the machine hardware is unnecessary.
- d) A program written for one computer will also run (perhaps after some modification) on any other computer PROVIDING you have a TRANSLATION program (written for that computer). The translation program for BASIC is called an INTERPRETER; the translation program for FORTRAN, ALGOL, CORAL, etc, is called a COMPILER.
- e) The compiler languages operate as follows:
 - i. The COMPILER must be resident in ROM (or perhaps floppy disk)
 - ii. The program written in high-level (called the SOURCE program) is then COMPILED(translated) within RAM into a set of machine language instructions called the OBJECT PROGRAM:
 - iii. The machine language object is now EXECUTED.
- f) An interpreter language such as BASIC operates as follows:
 - i. The INTERPRETER must be resident in ROM (or perhaps floppy disk)
 - ii. THE SOURCE program is translated line by line and EXECUTED line by line which means that the INTERPRETER occupies RAM memory during the EXECUTION.
- g) Each line (called a STATEMENT) of a high-level source program may cause the execution of many machine language steps. In general, the number of machine language steps will be greater after translation than would have been the case if the program had been written directly in machine language. High level language is therefore less efficient in terms of speed of execution. It is also more greedy in memory requirements.

For example a BASIC interpreter requires between four and ten kilobytes of storage space, dependent on the quality and facilities offered. For example, we are inundated with various hybrid forms of the original "Dartmouth" BASIC due to the explosion of the microprocessor-based "home computer". Thus we have "micro BASIC" (bare minimum), "mini BASIC" (bit better), BASIC (defined in the middle sixties at Dartmouth College in the USA) and a form called "extended BASIC" which is alleged to offer more powerful facilities than the original.

Assembly Language

Where does Assembly Language fit in? As described under compiler and interpreter languages, some form of translator program is still required if programs are to be written in ASSEMBLY LANGUAGE. There is however a fundamental difference.

A program written in assembly language has a one-to-one correspondence with the machine language translation. In fact it may be described as "mnemonically coded machine language". The Operation codes are

replaced by three-letter groups having some meaning. The addresses (OPERANDS) can be absolute addresses or, if the programmer chooses, can be letter groups of his own choice providing the absolute address associated with the group is stated at the beginning of the program (called the declaration or DIRECTIVE). Any instruction to which a BRANCH is subsequently made can be given a letter group LABEL (of the programmer's own choice).

Thus the operand of a Branch instruction need not be laboriously calculated by counting the bytes — all that is required is the label. In spite of this, it must not be thought that assembly language is easy. In fact the programmer must still think at machine level, it is still necessary to have some knowledge of the machine hardware, it is still necessary to understand the various addressing modes so it is still as difficult to write a program. There is however an important advantage.

Assembly language is far less error prone than hexadecimal machine language because of the powerful mnemonic aids of the letter groups and the BRANCH LABELS. In addition, some assemblers have built in editing aids. One final point is worth noting — a hexadecimal keyboard is cheap, but a full ASCII coded keyboard isn't and one of these, plus a few kilobytes of ROM must be purchased if you wish to up-grade your installation for assembly language programming facilities. And of course, you need the assembler program inside the ROM! By the way, if you ever become elevated to the peerage and decide to buy a PET 2001 or some similar "Mainframe giant," don't stick permanently on BASIC. Have a go with the excellent Assembler provided and get to know the micro-processor behind the glossy exterior. In short, don't remain a BASIC bumpkin all your life, learn the delights of intellectual frustration with an Assembler.

Format Of The Example Programs

The first column is simply the LINE NUMBER and proceeds in decimal sequence. The second column is the hexadecimal address where the FIRST BYTE of each instruction is stored in RAM. Remember here that memory is only ONE BYTE WIDE so each address can only hold TWO HEX CHARACTERS: This means that instructions which are three bytes long burn up three addresses which accounts for the rather jumpy progression of this column.

The third column is the MACHINE LANGUAGE PROGRAM. The first two characters represent the OPERATION CODE part of the instruction, ie, it tells the computer WHAT it is required to do. The remaining characters, if any, inform the computer what the data is or WHERE in memory it can be found.

Some instructions however, by their nature, do not require further information). It must be understood that column three is the complete MACHINE LANGUAGE PROGRAM and the only column that can be entered by a hexadecimal keyboard into RAM. The remaining columns, four, five, six and seven belong to the program written in ASSEMBLY language and strictly, are not required even to be written if the MEK D2 kit is to be used.

Nevertheless, it is advised that, even though it has no meaning to the machine, the Assembly columns should be included. In fact when first writing a program, this should be the first task after the preliminary flow chart has been scribbled because:

- a) it is easier the "think" in mnemonic letter groups
- b) if the program doesn't work first time (and it probably

D2 PROGRAMMING

- won't) it is easier to find bugs in the logic flow.
- c) if you eventually up-grade to an assembler version of the kit, you will have had at least a background feel for the new methods of writing programs.
 - d) other peoples programs written in magazines or manufacturers literature are always presented in both Assembly and Machine language; in fact, a copy of the so-called "Assembly Listing" outputted from the machine. It is worth emphasising again at this point that the example programs which follow are not completely representative of strict Assembly language because the Operands (addresses) are left in ABSOLUTE form in hex rather than symbolic letter groups in order to reate directly with the machine language lines.

Column four is the LABEL field and will only be used if the program has lines to which BRANCHES or JUMPS are to be made. The labels are chosen arbitrary by the programmer. Column five is the MNEMONIC OPERATION CODE. Column six is the ACCUMULATOR field, used to distinguish between ACC "A" and ACC "B". If this instruction does not refer to an accumulator at all then of course it would be left blank.

Column seven is the OPERAND field, which refers to the data or where abouts in memory the data can be found. Because there are several possible interpretations of an operand, defined symbols must be used to "tell" the assembler which addressing mode is intended. The symbolism used in the examples takes the following form:

- a) DIRECT ADDRESSING _____ two hexadecimal characters
- b) EXTENDED ADDRESSING _____ four hexadecimal characters
- c) IMMEDIATE ADDRESSING _____ the symbol _____ precedes the hexadecimal characters
- d) INDEXED ADDRESSING _____ two hexadecimal digits followed by a COMMA followed by X

The official MOTOROLA assembler allows the operand characters to be assumed decimal unless preceded by the \$ sign, in which case they would be assumed Hexadecimal. Since the D2 kit inputs only hexadecimal characters, this sign would be appearing before every address so for purposes of simplicity it has been omitted. Column eight is the REMARK which the programmer hopes may give some insight into his schizophrenic reasoning.

Analysis Of Example Programs

To understand the programs, the following information is assumed to be at hand:

- a) The set INSTRUCTION CODES for the MOTOROLA 6800 microprocessor
- b) The diagram depicting the function of each bit in the PIA Control Register.

Fig. 1. Board layout:

The kit consists of two boards, interconnected by a 50 way ribbon cable:

BOARD "A" contains the microprocessor, clock, PIA (dedicated to the keyboard), PIA for the user, ROM chips containing the "JBUG" monitor program, RAM for JBUG, RAM for user and a few logic chips.

BOARD "B" contains the hexadecimal keyboard, six digital display characters, ASIA dedicated to interfacing the tape recorder "backing store" and some logic chips.

RAM And ROM Capabilities:

JBUG _____ 1K ROM organised on the address bus at E000 to E3FF
JBUG "scratch-pad" RAM _____ " " A000 to A07F

Users RAM (256 bytes) _____ " " 0000 to 00FF
Sockets are provided on board "A" to increase users RAM by another 256 bytes and users ROM of 256 bytes.


Special Addresses:

User PIA SIDE "A" _____ 8004 and 8005
User PIA SIDE "B" _____ 8006 and 8007

AUDIO CASSETTE

Load starting address of block in A002 and A003
Load finishing address of block in A004 and A005

Interrupt vector addresses _____ A000 and A001

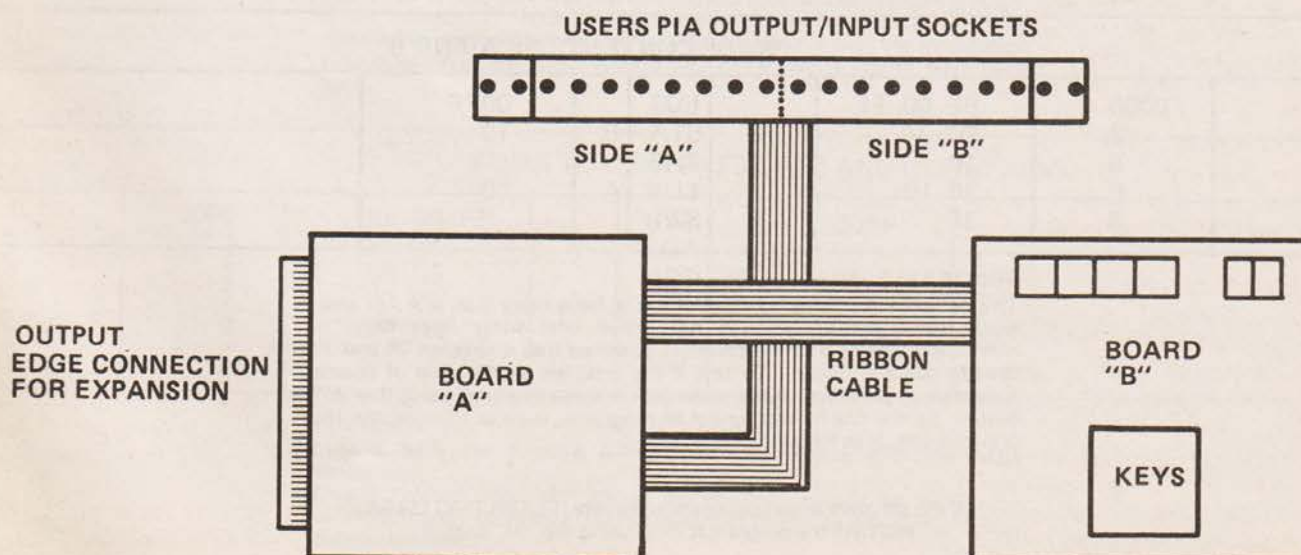

ASSEMBLY LANGUAGE

1	0000	8E 00 FF		LDS		00FF	Set up stack at 00FF
2	3	96 26		LDA	A	26	Load 1st number
3	5	9B 27		ADD	A	27	Add 2nd number
4	7	97 28		STA	A	28	Store
5	9	3F		SWI			Stop
6							

REMARKS
OPERAND
ACCUMULATOR
MNEMONIC OP-CODE
LABEL FIELD

OPERAND

HEX MACHINE CODE

OP-CODE

INSTRUCTION ADDRESS

LINE NUMBER

Note: 1. The program is trivial and simply adds contents of addresses 26 and 27 and stores sum in 28

2. Always write out programs in above format

3. The symbol denotes the operand is IMMEDIATE

4. Hex addresses should strictly be preceded by the symbols but in these examples they will be omitted.

Program 1

Line 1 — sets the STACK-POINTER at the last address in user's RAM. Note that the addressing mode is IMMEDIATE because 00FF is to be considered **data** (not the address of where data is). Note also that, because the Stack Pointer is 16 bits long, a full four-bit address is required; thus FF won't do — it must be written as 00FF.

Line 2 — This LOADS the content of address 26 into ACC A, using the machine code 96 which is **direct** addressing. Note carefully that we use Load (LDA) when going FROM a memory location TO a register. It is also relevant to stress at this point that after LDA, the original data in the memory location is STILL there but the Accumulator will now have its old contents overwritten by the new data. This is why the first number was LOADED into the Accumulator in order that previous "garbage" is destroyed.

Line 3 — This adds the contents of address 27 to the previous contents of ACC A. Again, the original contents of address 27 remains unharmed.

Line 4 — Stores the contents of ACC in the address 28; note that we use STORE (STA) when going FROM a register TO a memory address. This time however, the ACC still retains its data but the memory location now

holds the new information: the old contents are overwritten.

Line 5 — stops the program. There is no actual STOP instruction in the repertoire but SWI (Software Interrupt) has the same effect with the additional advantage that all the registers have their contents copied into the STACK enabling them to be examined with the aid of the Register Examine mode in JBUG.

Note carefully the progression in column two (the memory addresses where the instructions are stored). The first byte of the first instruction is stored in address 0000 (an arbitrary but logical choice for the beginning address). Because this instruction is three bytes long, the beginning of the next instruction is placed at address 0003. This is two bytes long so the first byte of the next instruction is at address 0005 — and so on.

The discussion of this elementary (perhaps trivial) program has taken up a lot of space but it is essential at the beginning of one's programming career to grasp the simple well — the difficult programs are then easy! Such detail in the remaining programs will not be given unless a new instruction or idea is employed.

SWOP CONTENTS OF A AND B

1	0000	8E 00 FF		LDS		00FF	
2	3	D7 10		STA	B	10	
3	5	16		TAB			
4	6	96 10		LDA	A	10	
5	8	3F		SWI			

PROGRAM 2

This program illustrates how useful it is to have more than one Accumulator (some microprocessors only have one, some have eight or more). Remember that the program assumes that addresses 26 and 27 already contain "Data". To test if the program works, it is of course necessary to previously place some data in these locations using the "M" button. So the rule for testing out all programs, such as this one and the previous one, is as follows:

If the program assumes data somewhere, ENTER THIS DATA BEFORE the program is RUN using the "M" button.

D2 PROGRAMMING

If this is not done, there is no way of telling if the program is free of bugs. It may be worth mentioning here that when entering arbitrary data in order to test a program it is better to choose rather small numbers if the program is intended to perform arithmetic. Thus if two numbers are to be added, pick numbers like 03 and 05 so the answer is not into the hexadecimal letters. Thus if you pick 29 and 54 then the sum should come to 7D (which may not be immediately obvious unless you and the microprocessor both have hexadecimal brains).

SWOP CONTENTS OF 26 AND 27						
1	0000	8E 00 FF	LDS		00FF	
2	3	96 26	LDA	A	27	
3	5	D6 27	LDA	B	27	
4	7	97 27	STA	A	27	
5	9	D7 26	STA	B	26	
6	B	3F	SWI			

PROGRAM 3

This is similar to Program 2 but swops the two accumulators over (or rather the contents of them). Note the very economical instruction TAB meaning "transfer contents of ACC A to ACC B" (thus they will both have the same data as was in ACC A before the instruction). Note that TAB uses INHERENT addressing so an address byte is not required. One snag here, how can we place data in the two accumulators to test the program out before it is run? This is where old JBUG comes to the rescue because after line 5, which is SWI, all the registers are stored methodically into the STACK. Since we have set the BOTTOM of the stack at 00FF, the old chap stores the PROGRAM COUNTER (PC) in the addresses 00FF and 00FE, the INDEX REGISTER (X) in the addresses 00FD and 00FC, ACC A in 00FB and ACC B in 00FA, etc. Thus to place test data in ACC A and B, use the "M" button to expose the address 00FA and 00FB. It is essential to execute a dummy run first in order that SWI can first do its job; then place in the data before you run it again.

ADD 1 TO A, ADD 3 TO B, ADD 1 TO CONTENTS OF 27						
1	0000	8E 00 FF	LDS		00FF	
2	3	4C	INC	A		Add 1 to A
3	4	CB 03	ADD	B	03	Add 3 to B
4	6	7C 00 27	INC		0027	Add 1 to contents of 27
5	9	3F	SWI			

PROGRAM 4

The simple way to "add 1" to an accumulator or a memory location is to use the instruction INC which means "increment". Line 2 uses the code 4C which increments ACC A. Line 3 uses IMMEDIATE addressing to add 3 to ACC B. Line 4 uses INC again to add 1 to the contents of address 27. Slight query here, why was the EXTENDED address used requiring 0027? Since address 27 is supposed to be in the bounds of DIRECT addressing, why didn't we use this? The answer is that the instruction INC doesn't allow direct addressing, otherwise it would have been used.

ADD 5 TO CONTENTS OF 26 AND CLEAR A000						
1	0000	8E 00 FF	LDS		00FF	
2	3	96 26	LDA	A	26	
3	5	8B 05	ADD	A	05	
4	7	97 26	STA	A	26	
5	9	7F A0 00	CLR		A000	
6	C	3F	SWI			

PROGRAM 5

Line 3 adds the 5 using IMMEDIATE addressing with the ADD instruction.

Line 5 "clears" (fills with Zeros) the contents of address A000 by using CLR with EXTENDED ADDRESSING (because it is a four hexadecimal address).

TRS-80 £620.00

We have no expensive consultancy or shop front overheads -- only low prices.

Tandy TRS-80 16k Level II

Complete with CPU/
keyboard, Video monitor,
Cassette recorder, Manuals
and new numeric keyboard.
£620.00 + VAT

240 volt power supply
£10.00

Delivery within 14 days
of cheque clearing
(mainland only).

MICROCOMPUTER IMPORTS

Tel. (0276) 24291
Mail order address
129 Upper Chobham Road
Camberley, Surrey

SUPERBOARD II

4K — £263* 8K — £299*

(modulator included)

FIBRE GLASS CASE £24.95

TRS 80 KEYBOARD

4K LEVEL II — £390* 16K — £490*

(modulator included)

POWER SUPPLY £9.90*

ATARI VIDEO COMPUTER

VCS — £139* CARTRIDGES £12.95*

NEW — CODE BREAKER BRAIN GAMES
HUNT & SCORE

SOFTY EPROM DEVELOPMENT- BURNER SYSTEM

(kit) — £79.50*

* PRICES EXCLUDE 8% VAT — FULL DETAILS ON REQUEST

VIDEOTIME PRODUCTS



56 Queens Road, Basingstoke,
Hants. RG21 1REE
Tel. (0256) 56417. Tlx. 858747



**PET AND TRS80 PROGRAMS URGENTLY
REQUIRED** by established software com-
pany, for nationwide sale. High royalty pay-
ments for top-quality original software —
any application. Phone Chris Holbrook on
0222-372066 anytime.

NASCOM in nice cabinet with heavy duty
fan cooled protected P.S.U., CUTS interface,
B-BUG, cassette and all data books. £250.
8K dynamic RAM £40. Bonner, Orpington
26802.

6800 ASSEMBLER in 2K PROM, processes
additional 6801 instructions, position
independent, no extra RAM required, MINI/
MIKBUG compatible. Also available super
TTY monitor. SAE for details Leisure Time
Ltd., Crozier Road, Mutley Plymouth.

FOR SALE, a basic ELF II microcomputer.
Constructed, cased and operational, com-
plete with expansion power supply and
documentation. £170 o.n.o., C. Goudie,
34 Crofthead Avenue, Kilmarnock KA3 2HA.

TRACTOR PRINTER FOR SALE, complete
with Keyboard. Also available a paper tape
reader/punch and winders. Can be delivered.
Offers. Phone Crawley 510358 after 5 p.m.

WANTED: TRS-80 Level-1 4K micro-
computer. Will pay up to £250 (negotiable).
Telephone 061 795 5025 after 5.30. Man-
chester.

NASCOM 1, microcomputer, PSU, cased
and working. T2 monitor and documentation.
£210 ono. Alan Knifton, Derwent Cottage,
Sitch Lane, Oker, Matlock, Derbyshire (0629
83 4426).

NASCOM 1 system with PSU and B-Bug,
wired, and tested by Nascom. £200 complete.
Will deliver within reason. Derby 880526
evenings.

NASCOM 1, B-Bug, buffer, cassette re-
corder, games tape, documentation. Ex-
change for anything to produce hard copy
from a "Pet" or sell for best offer. Stanton
(Suffolk) 0359-50619.

TRS 80 SOFTWARE. Full business
systems, bookkeeping, mailing, text
writing. Write for details and advice
BOX 115, 30 Heathfield Road, Croydon,
Surrey.

TRS 80 HARDWARE. Also lower case
printers, micropolis disc drives. BOX 114,
30 Heathfield Road, Croydon, Surrey.

WHAT HAPPENED TO
YOU?



I GOT SHOT DOWN
PLAYING A VERY REALISTIC
COMPUTER DOGFIGHT
GAME!!



The Gospel according to E.T.I.

CLASSIFIED

BRITISH MOTOROLA 6800 SYSTEMS

6800S: 16K Dynamic RAM, 1K Mikbug compatible monitor, room for 8K BASIC in ROM, VDU with u/I case and graphics, CUTS and HI Speed tape interfaces, Single pcb with power supply components. Price of kit from £275 with out kdb or £299.00 with keyboard.

Mini 6800 MK2. 1K user RAM, CUTS, VDU with u/I case and graphics with QUERTY keyboard from £152.50

NCU Board. This number cruncher using the MM57109 is supplied with our own Basic style program on tape (3K bytes) that will outperform any of the 8K Basics as a programmable calculator. Suitable for any 6800 system with Mikbug. Kit price £32.00

8K RAM (2114) and 5 or 10K PROM board. This pcb is bus compatible with the above systems and has all the buffering and decoding that you need. PCB only, £13.00

ALL PRICES WITHOUT VAT AND POST.
PLEASE SEND S.A.E. FOR LEAFLETS.

HEWART MICROELECTRICS

95 Blakelow Road, Macclesfield,
Cheshire.

Something to sell?

Using a space this size,
you could show your pro-
duct to upto 35,000 poten-
tial customers for only
£38.00

For details contact

01-437 2412

ANNOUNCING THE NEW

μHEX EPROM PROGRAMMER

PUSH BUTTON SWITCHING FOR
2704, 2708 and 2716

Needs only standard CPU power supplies.
Has on-board stabilised 26v inverter.

PERFECT FOR Nascom, Micros, etc.
or any PIO equipped CPU.

Tested and approved by
NASCOM



Includes Z80, 8080, and 6800
control programs.

Features zero force Eprom socket.



ONLY £65
inc. VAT & post.

Early orders ex stock
s.a.e. for details

MICRO HEX COMPUTERS
2 Studley Rise, Trowbridge, Wilts.

AD INDEX

ACORN.....	44	METAC.....	31
AJD DIRECT SUPPLIES.....	58	MICROCOMPUTER IMPORTS.....	72
ANALOGUE ELECTRONICS.....	20	NASCOM.....	66
BETOS SYSTEMS.....	5	NEWBEAR.....	76
COMP COMPUTER COMPONENTS.....	74 & 75	NIC MODELS.....	31
CROFTON.....	20	PETALECT.....	26
HAL COMPUTERS.....	20	PETSOFT.....	12
HAPPY MEMORIES.....	53	PICODYTE.....	34
A.J.HARDING.....	58	POWERTRAN.....	2 & 3
HENRY'S.....	53	SOFTWARE PUBLISHING COMPANY.....	58
H.L.AUDIO.....	53	STRATHAND.....	34
LOTUS SOUND.....	4	TECHNALOGICS.....	26
L.P.ENTERPRISES.....	10	TRANSAM.....	62
		VIDEOTIME.....	72

THIS SECTION IS A PRE-PAYMENT SERVICE ONLY

MINI-ADS: 31/4" x 21/8", 1-3 £38, 4-11 £36, 12 or more £34 per insertion. CLASSIFIED DISPLAY: 19p per word. Minimum 25 words. Boxed classifieds are £6.33 per col. centimetre. No P.O. Box Numbers can be accepted without full address.

Enquiries to: Advertising Department, 01-437 5982. 25-27 Oxford Street, London W1R 1RF

INTERESTED IN HOME COMPUTING?

Start now and don't get left behind **THE NASCOM 1**
is here Ex-stock with full technical services

Plus the opportunity to join the fastest moving club of personal computer users enabling you to get the most out of your computer. You can OBTAIN and EXCHANGE programs and other software — many now available.

The Powerful Z80
Microprocessor
Professional Keyboard
1 Kbyte Monitor in EPROM
2 Kbyte RAM (expandable)
Audio Cassette interface
Plugs into your domestic TV
Easy construction from
straightforward instructions
— no drilling or special tools
— Just neat soldering
required.



**SAVE
£60**

Only ~~£197.50~~ + 8% VAT (includes p & p + insurance)

Manuals separately **2.95**
Z80 programming Manual **6.90**
Z80 Technical Manual **2.95**
PIO Technical Manual **2.95**

(All prices add 8% VAT)

NEW LOW PRICE
£165 + VAT

Power supply suitable for
NASCOM **19.90**

NASCOM AD ONS — Nascom improved monitor B Bug (2K)
featuring — *Four times tape speed *Direct text entry without
ASCII *Extended keyboard facility *Additional useful
subroutines **£23.00**

Nascom Vero Case
£22.50

Nascom Music Box Kit **£9.90**

(write your own tunes and play
them on your Nascom.
Complete with full documentation).

Nascom Joy Stick Kit
£14.90

GRAPHICS ADD ON BOARD £9.90

Complete kit to upgrade your NASCOM for graphics capability
includes full documentation and demonstration program.

NASCOM IMMEDIATE EXPANSION S100 from COMP —strongly recommended

The only available S100 motherboard kit (fully buffered) that
plugs directly into your Nascom. Designed for the insertion
of S100 boards (e.g. Static RAM, EPROM and discs etc.).

S100 Motherboard/Buffer **£47.50**
(Complete kit + documentation)

Suitable 8K Static RAM Memory **£125-£110**
(fully assembled tested and guaranteed)

Motherboard
comes complete
with 2K Tiny
Basic On
cassette.

NASCOM LOW COST EXPANSION

Uses dynamic RAM and NASBUS
(please note this expansion does not support S100 memory)

Tiny Basic in EPROM **£25.00**
8K Dynamic RAM board (in kit only) **£85.00**
Motherboard (in kit only) **£12.50**
Buffer board (in kit only) **£25.00**

All
plus
VAT

SHORT C12 CASSETTES 10 for £4.00 FOR COMPUTER PROGRAMMES

SPECIAL DYNAMIC MEMORY OFFER

£69
+ VAT

8 x 4116 □ 150ns access time, 320ns cycle

COMPUKIT UK101 —ON DEMO

All specifications of Superboard with many improvements and in
kit form including power supply and modulator on board. Improved
video display with 48 chars x 16 lines. English TV Standard.

£219
+ VAT

RELEASED END OF
JUNE 1979.

SEND £10 DEPOSIT TO RESERVE

OHIO SUPERBOARD II NEW —ON DEMO

For electronic buffs. Fully assembled and tested. Requires +5V at
3 Amps and a video monitor or TV with RF converter to be up and
running.

STANDARD FEATURES

Uses the ultra powerful 6502 microprocessor
8K Microsoft BASIC-in-ROM
Full feature BASIC runs faster than currently
available personal computers and all
8080-based business computers.
4K static RAM on board expandable to 8K
Full 53-keyboard with upper/lower case and user
programmability
Kansas City standard audio cassette interface
for high reliability
Full machine code monitor and I/O utilities in
ROM

Direct access video display has 1K of dedicated memory (besides
4K user memory), features upper case, lower case, graphics and
gaming characters for an effective screen resolution of up to 256
by 256 points. Normal TV's with overscan display about 24 rows
of 24 characters; without overscan up to 30 x 30 characters.

EX-STOCK — £263 + VAT

Please phone to check availability or send £10 to
reserve one and pay the balance on delivery

MODULATORS UHF Channel 36

Standard 6 meg band width **£2.25**
High Quality 8 meg band width **£4.90**

INDUSTRIAL POWER SUPPLY

+5v 10 amps — **£63.25** +5v 5 amps +12v-12v-5v **£89.00**
DC switched Both housed and fully guaranteed. Lightweight

TRS 80 SOFTWARE NEW
100 MIXED PROGRAMMES **£39.00**
on cassette (inc.VAT)

HITACHI 9" & 12" PROFESSIONAL MONITORS

SUPERB DEFINITION

9" — **£132**
12" — **£210** } + VAT




Delivery charged at cost — Red Star — Securicor — Post etc.. Your
Choice. Please make cheques and postal orders payable to COMP, or
phone your order quoting BARCLAYCARD or ACCESS number.

OPEN — 10am to 7pm — Monday to Saturday
CONTINUOUS DEMONSTRATIONS



JUST COMPARE OUR CASH AND CARRY PRICES!

THE TRS-80 (SPECIAL SCOOP) Low Priced, Ready to Go! ★

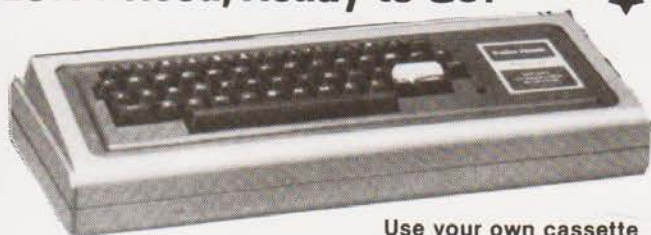

Use your own cassette

Level-II with 4K RAM

Improved graphics, print formatting, and a faster cassette transfer rate are features of Level-II BASIC.

£399 + VAT

PLUGS INTO
YOUR OWN TV

Level-II with 16K RAM

A combination of 16K RAM and the powerful Level-II BASIC produces a system capable of handling most demands.

£499 + VAT

FREE 100 PROGRAMS

KEY BOARD ONLY

**COMPLETE WITH
UHF MODULATOR**

UK POWER SUPPLY — £9.90 + VAT

ATTENTION! **SAVE £90** TRS 80 & APPLE II USERS

*Simple to fit—
only a screw-
driver is
required.*

**16K UP
GRADE KIT** **HALF NORMAL PRICE** **£99 + VAT**

**LIFETIME
GUARANTEE**

NEW Standard QWERTY Keyboard with 16K Memory



**only
£625**
+ VAT

The No. 1
in the U.K.
Affordable

8K PET still at
unbeatable price of **£499 + VAT**



ITT
MICRO COMPUTER

£827
+ VAT

NEW! THE ITT APPLE (2020)

EX STOCK 4K

**LOW PRICE MEMORY UPGRADE
PURCHASED AT TIME OF ORDER**

**16K
£49**
+ VAT

* Full colour - UHF output * Audio cassette tape interface * Up to 48K RAM on board * BASIC in ROM (graphics commands include COLOUR = VLIN, HLIN, PLOT and SCRN) * Built in Loudspeaker * Buckets of software already available * disk system (110 K byte per drive — includes controller) only **£425 + VAT**

THE EXIDY SORCERER. **SAVE**

SORCERER COMPUTER SYSTEM

The Sorcerer Computer is a completely assembled and tested computer system. Standard configuration includes 63-key typewriter-style keyboard and 16-key numeric pad, Z80 processor, dual cassette I/O with remote computer control at 300 and 1200 baud data rates, RS232 serial I/O for communications, parallel port for direct Centronics printer attachment, 4K ROM operating system, 8K ROM Microsoft BASIC in Rom Pac™ cartridge, composite video of 64 char/line 30 line/screen, 128 upper/lower case ASCII set and 128 user-defined graphic symbols, operation manual, BASIC programming manual and cassette/video cables, connection for S-100 bus expansion.



LOOK!

*32K RAM on board *8K BASIC ROM *CUTS interface *4K MONITOR *KANSAS CITY interface *\$100 BUS *User defined graphic symbols *280 cpu

EXIDY SORCERER 32 RAM COMPUTER £790 + VAT

BOOK SHELF

LOW PRICES FAST SERVICE!

Vol 0 The Beginner's Book	£5.40
Vol 1 Basic Concepts +	£5.90
Vol 2 Some Real Products (June 1977)	£9.90
Microprocessor series, by Rodney Zaks C201 From Chips to Systems	£7.50
C207 Interfacing Techniques	£7.50
Microprocessor Systems Design by Edwin Klingman ISBN 0-135-81413-8 (1977) 480 pages hard cover	£6.40
CMOS Cookbook by Don Lancaster	£6.90
6800 Assembly Language Programming	£6.50
6800 Software Guide & Cookbook from Scelbi	£7.90
8080 Software Guide & Cookbook from Scelbi	£7.90
8080 A/8085 Assembly Language Programming	£6.50

8080A Bugbook Interfacing & Programming by Rony, Larsen & Titus (1977) 416 pages	£6.90
Z80 Programming for Logic Design by Adam Osborne	£5.90
Z80 Microcomputer Handbook by William Barden	£7.20
Structured Programming & Problem Solving with Pascal ISBN 0-138-54869-2 (1978) 365 pages by Kiebertz "When will your microcomputer speak Pascal?"	£9.50
BASIC Computer Games — Microcomputer edition	£5.40
Best of BYTE Vol 1 (1977) 376 pages	£8.90
Best of CREATIVE COMPUTING Vol 1 (1977) 326 pages	£6.90
Vol 2 (1977) 323 pages	£6.90
MOI OTHELLO Game for 2 players on NASCOM 1 cassette	£2.00
MOI MINO PILOT powerful text editor and interpreter in 1/2 KB!	£5.00

COMP COMPUTER COMPONENTS

(PART OF THE COMPSHOP LTD. GROUP)

For technical and sales literature send SAE to:
COMP COMPUTER COMPONENTS (Exidy UK Sales),
Freeport, 14 Station Road, New Barnet, Herts.
Tel: 01-441 2922 (Sales) 01-449 6596 Telex: 298755

**TAKE ADVANTAGE OF OUR
SHORT DELIVERY TIME.**

All prices exclusive of VAT

SEND FOR OUR SPRING '79 CATALOGUE - 0-60p



NewBear



Computing Store Ltd.

New

**- Newbear DB 80
Printer £595**

Serial and parallel ports
optional extras - 64 Key ASC11
Keyboard.
alternative character sets.

Introducing - Newbear 700

low cost VDU ex stock **£299**
V24 interface, upper case only
keyboard and monitor available
separately

Sym 1 6502 based micro from Synertek -
fully assembled and tested
Down in price now only **£160**

Newbear now stocks O.K. Tools

Horizon (S100 bus Z80 based micros)
16K RAM with single disc drive **£1265**
32K RAM with double disc drive
with 2 serial and 1 parallel port **£1983**

Schugart SA 400

5¼in disc drives down to **£190**

Now in stock BASF 5¼in disc drives £



Books

The Users Guide to North Star Basic R.Rogers
£10.00 .75 pp

Basic with Business Applications Hayden
£5.56 .50 pp

Basic Basic (An introduction to computer
programming in Basic language) J.S.Coan
£5.40 .50 pp

Practical Microcomputer Programming(6800)
Weller £17.56 1.00 pp

Volume 0. The Beginners Book A.Osbourne
£5.95 .50 pp

Volume 1. Basic Concepts A.Osbourne
£5.95 .50 pp

Volume 11. Some Real Products A.Osbourne
£18.95 1.00 pp

Volume 111. Some Real Support Devices
A.Osbourne £11.95 1.00 pp

Understanding microcomputer and Small
Computer Systems Scelbi £7.56 .50 pp

Book orders over £40 p&p free

Send for our complete book list

All prices subject to 8% VAT
Carriage by arrangement.
Barclaycard and Access welcome.
Minimum official order £10.

Callers welcome Mon - Sat 9.00 to 5.30 but
please phone us first on 0635 30505

Visit our Northern office at
2A Gatley Rd.,
Cheadle, Cheshire.
Tel: 061-491 2290.

All Mail Order to Newbury.



**Our new address is
Newbear Computing Ltd.
40 Bartholomew Street,
Newbury, Berks.**