

computing today

MAY 1980

ISSN 0143-7279

60p

STOCKMARKET!

Get rich
quick...



COSTLY CARS?

More miles per pound

COMPUTER PATTERNS

BUZZWORD CHART

TAPE INTERFACE

LATEST SEIKO CALCULATOR WATCH
Over 30% off RRP. See inside...



8K ON BOARD MEMORY!

5K RAM, 3K ROM or 4K RAM, 4K ROM (link selectable). Kit supplied with 3K RAM, 3K ROM. System expandable for up to 32K memory.

2 KEYBOARDS!

56 Key alphanumeric keyboard for entering high level language plus 16 key Hex pad for easy entry of machine code.

GRAPHICS!

64 character graphics option — includes transistor symbols! Only £18.20 extra!

MEMORY MAPPED

high resolution VDU circuitry using discrete TTL for extra flexibility. Has its own 2K memory to give 32 lines for 64 characters.

KANSAS CITY

low error rate tape interface

NEW FACTORY UP!

PRICES DOWN!

Increased capacity at our Big New Factory means many prices down! All others frozen!



Cabinet size 19.0" x 15.7" x 3.3". Television not included in price.

2 MICROPROCESSORS

Z80 the powerful CPU with 158 instructions, including all 78 of the 8080, controls the MM57109 number cruncher. Functions include +, -, *, /, squares, roots, logs, exponentials, trig functions, inverses etc. Range 10^{-99} to 9×10^{99} to 8 figures plus 2 exponent digits.

EFFICIENT OPERATION

Why waste valuable memory on sub routines for numeric processing? The number cruncher handles everything internally!

RESIDENT BASIC

with extended mathematical capability. Only 2K memory used but more powerful than most 8K Basics!

1K MONITOR

resident in EPROM.

SINGLE BOARD DESIGN

Even keyboards and power supply circuitry on the superb quality double sided plated through-hole PCB.

COMPLETE KIT

NOW ONLY


£225 plus VAT!

POWERTRAN

PSI Comp 80.Z80 Based powerful scientific computer
Design as published in Wireless World

The kit for this outstandingly practical design by John Adams published in a series of articles in Wireless World really is complete!

Included in the PSI COMP 80 scientific computer kit is a professionally finished cabinet, fibre-glass double sided, plated-through-hole printed circuit board, 2 keyboards PCB mounted for ease of construction, IC sockets, high reliability metal oxide resistors, power supply using custom designed toroidal transformer, 2K Basic and 1K monitor in EPROMS and, of course, wire, nuts, bolts, etc.

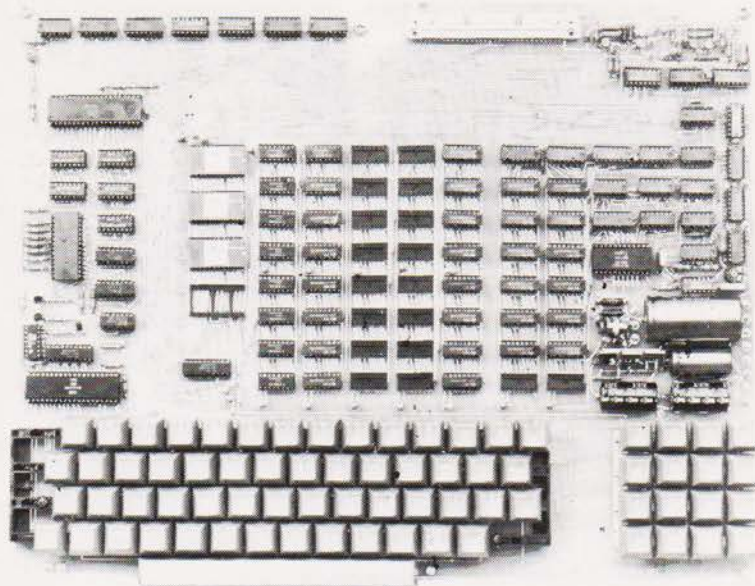

Value Added Tax not included in prices

PRICE STABILITY: Order with confidence. Irrespective of any price changes we will honour all prices in this advertisement until July 31st, 1980. If this month's advertisement is mentioned with your order. Errors and VAT rate changes excluded.

EXPORT ORDERS: No VAT. Postage charged at actual cost plus £1.00 handling and documentation.

U.K. ORDERS: Subsequent to 15% * surcharge for VAT. NO charge is made for carriage. * Or current rate if changed.

SECURICOR DELIVER: For this optional service (U.K. mainland only) add £2.50 (VAT inclusive) per kit.

SALES COUNTER: If you prefer to collect your computer from the factory, call at Sales Counter. Open 9 a.m. — 12 noon, 1 — 4.30 p.m. Monday — Thursday.

KIT ALSO AVAILABLE AS SEPARATE PACKS

For those customers who wish to spread their purchase or build a personalised system the kit is available as separate packs eg. PCB (16" x 12.5") £43.20. Pair of keyboards £34.80. Firmware in EPROMS £30.00. Toroidal transformer and power supply components £17.60. Cabinet (very rugged, made from steel, really beautifully finished) £26.50. P.S. Will greatly enhance any other single board computer including OHIO SUPERBOARD for which it can be readily modified. Other packs listed in our FREE CATALOGUE.

PSI COMP 80 Memory Expansion System

Expansion up to 32K all inside the computer's own cabinet!

By carefully thought out engineering a mother board with buffers and its own power supply (powered by the computer's transformer) enables up to 3 8K RAM or 8K ROM boards to be fitted neatly inside the computer cabinet. Connections to the mother board from the main board expansion socket is made via a ribbon cable.

Mother Board	Fibre glass double sided plated through hole P.C.B. 8.7" x 3.0" set of all components including all brackets, fixing parts and ribbon cable with socket to connect to expansion plug	£39.90
8K Static RAM Board	Fibre glass double sided plated through hole P.C.B. 5.6" x 4.8" Set of components including IC sockets, plug and socket but excluding RAMs.	£12.50
	2114L RAM (16 required)	£11.20
	Complete set of board, components, 16 RAMS	£5.00
8K ROM Board	Fibre glass double sided plated through hole P.C.B. 5.6" x 4.8" Set of components including IC sockets, plug and socket but excluding ROMs	£89.50
	2708 ROM (8 required)	£12.40
	Complete set of board, components, 8 ROMs	£10.70
		£8.00
		£78.50

NEW FACTORY ON SAME INDUSTRIAL ESTATE
ADDRESS AND TELEPHONE NUMBER UNCHANGED

POWERTRAN COMPUTERS

(a division of POWERTRAN ELECTRONICS)


PORTWAY INDUSTRIAL ESTATE
ANDOVER HANTS SP10 3MN

ANDOVER
(0264) 64455

computing today

VOL.2 No.3
MAY 1980

Editor : Ron Harris B.Sc.
Assistant Editor : Henry Budgett
Editors Assistant : Tina Boylan
Art Director : Diego Rincon
Production : Dee Camilleri, Loraine Radmore,
Enzo Grando, Lorraine Stout,
Paul Edwards, Tony Strakas,
Joanne Barseghian.
Group Advertisement Manager : Christopher Surgenor
Advertisement Representative : David Sinfield
Advertisement Production : Sandie Neville
Managing Director : T.J. Connell

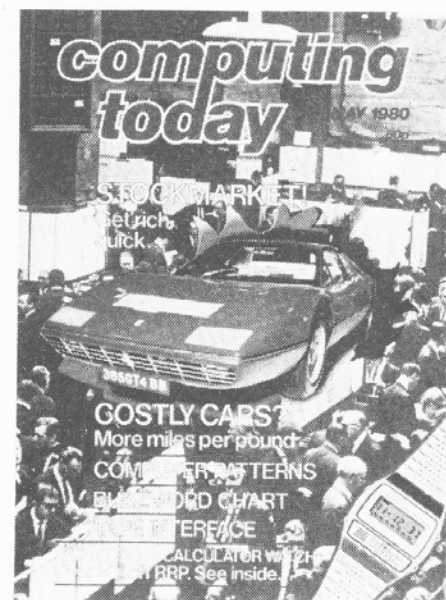

NEWS It's here if it's worth knowing!	6
COMPUTER PATTERN Make a few waves	10
TRITON REVISITED One of our long-term user reports	12
PROBLEM PAGE Solve it if you can	18
CALCULATOR WATCH OFFER Count the savings on this	22
MACHINE CODE PROGRAMMING The insight into this hexed subject	26
MOTOR FINANCE Make them wheels pay!	32
MICROLINK Making micros mechanical	38
PRINTOUT Have the last word!	46
STOCKMARKET So you think you're Rockafeller?	50
TAPE INTERFACE Getting an Mk 14 taped	62
MPUs BY EXPERIMENT Learning by doing	68

PLUS : FREE PULLOUT BUZZWORD CHART! See centre spread.

Computing Today International is normally published on the second Friday of the month prior to the cover date.
©MODMAGS 1980: All material is subject to worldwide Copyright protection. All reasonable care is taken in the preparation of the magazine to ensure accuracy but CT cannot be held responsible for it legally. Where errors do occur a correction will be published as soon as possible afterwards.


Distributed by Argus Distribution Ltd., 12-18 Paul Street, London. Printed by LSG Limited, Lincoln.

EDITORIAL AND ADVERTISEMENT OFFICE
145 Charing Cross Road, London WC2H 0EE. Telephone 01- 437 1002/3/4/5.

WHAT DOES £425 (incl VAT) BUY IN 1980 ?



A highly quality cassette, with tape counter 16k user RAM. A full 12k Microsoft compatible BASIC, and system monitor, which is able to run TRS-80 level II programs straight from cassette tapes.

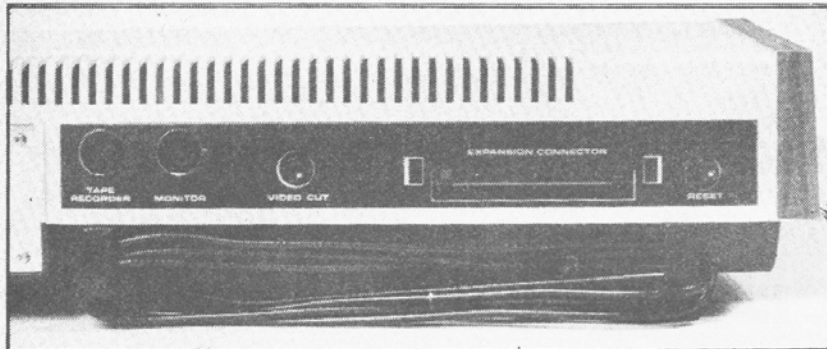

In short a:-


**video
genie
system**

Contact:-

LOWE ELECTRONICS

Lowe Electronics Limited, Bentley Bridge, Chesterfield Road, Matlock, Derbyshire.
DE4 5LE. Telephone 0629 2817 or 2430. Telex 377482 LOWLEC G
TRADE ENQUIRIES WELCOME

A bounce free typewriter keyboard. A stylish case containing a cassette, PSU, and UHF modulator.

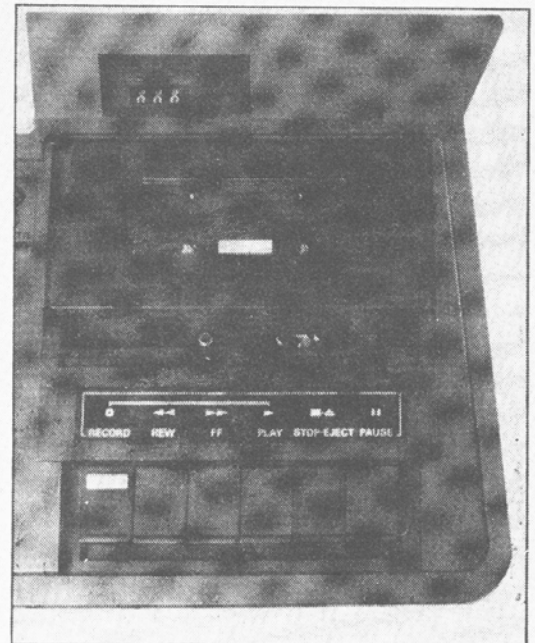

With full expansion capability, also outputs for, video, TV and second cassette.



AT LAST!

Appleware

The best of
British and American
**APPLE
SOFTWARE**

ACT Appleware brings you 70 classic programs from the worlds leading suppliers of Apple software. Many have already become best sellers in America. So send today for a free copy of the most exciting Apple software catalogue ever. We promise


to keep you on the mailing list.

Appleware is backed by the resources of the ACT Group, Britains leading computing company. Contributing software houses include Programma International, Personal Software, Automated Simulations, Speakeasy Software and P.D.I.

Disk programs include:

Applepie Text Editor £30
Alien Invaders £8
Apple Database £23.50
Talking Disk (Speech Synthesis) £14.95
Apple FORTH £39.95
Assembler/Editor (in machine code) £45

Try them at your Apple Dealer. Also available by mail order direct from ACT Appleware.

 Send a free catalogue to

Name


Address

Post code

I have an ☐ Apple II ☐ ITT2020
☐ No Apple

Appleware

Radclyffe House, 66/68 Hagley Road, Edgbaston, Birmingham B16 8PF
Telephone 021-455 8585 Telex 339396

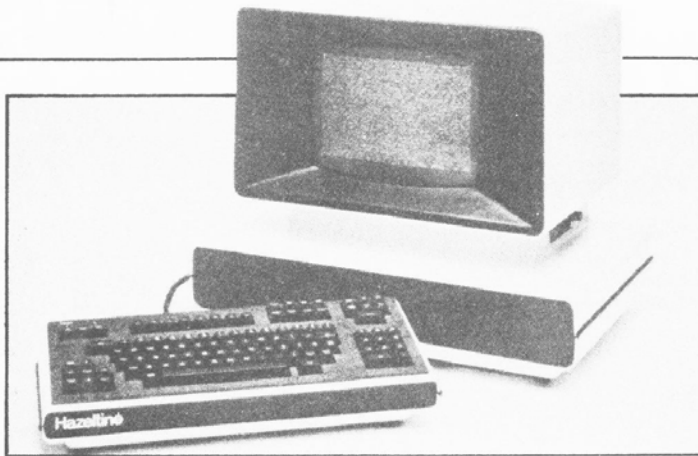

VDU SELL OFF

Electronic Brokers have a special purchase of Hazeltine VDUs that they are selling off at less than half price. Although they are second hand they are "re-furbished as new" and offered with full warranty and back-up. There are two versions available, a basic model at £425 and an editing version for £695. Both prices do not include VAT or carriage. Contact Electronic Brokers at 49-53 Pancras Road, London NW1X 4QL.

REM FOR PILOTS


Those of you who are delving into our Distance program, published in the Feb issue, may have come across an anomaly in the formulae. In the polynomial expression that we published for arc cos the third term in the bracket should have read

$$\frac{1 \cdot 3 \cdot 5}{2 \cdot 4 \cdot 6} x^7$$

There are no errors in the actual program listing that we are aware of.

BUMPER BOOKLET

Petsoft, that most prolific of software publishers, has expanded its new catalogue to 16 pages in order to cram all the goodies in. Among the new products is a hand-held digitiser pad called Prestodigitiser and the range of programs that we have been covering in our news recently. Not only are software and hardware from Petsoft included but also the vast range of other people such as Hippo-soft and Personal Software are all mentioned. Free copies of the catalogue are available direct from Petsoft at their Birmingham address as is all the software on mail order. The rate of growth of the ACT group of which Petsoft is a member has caused them to open a new Engineering and Research centre in Birmingham which will be used to test and maintain the new Series 800 systems produced in conjunction with Compu/Think. I mentioned some months ago that a gold cassette had been presented to an author of one of Petsoft's programs for reaching the 50,000th sale, well the Americans in the form of Personal Software seem to have felt left out and are now busily throwing gold plated objects around like confetti. Britain 1, USA 0.

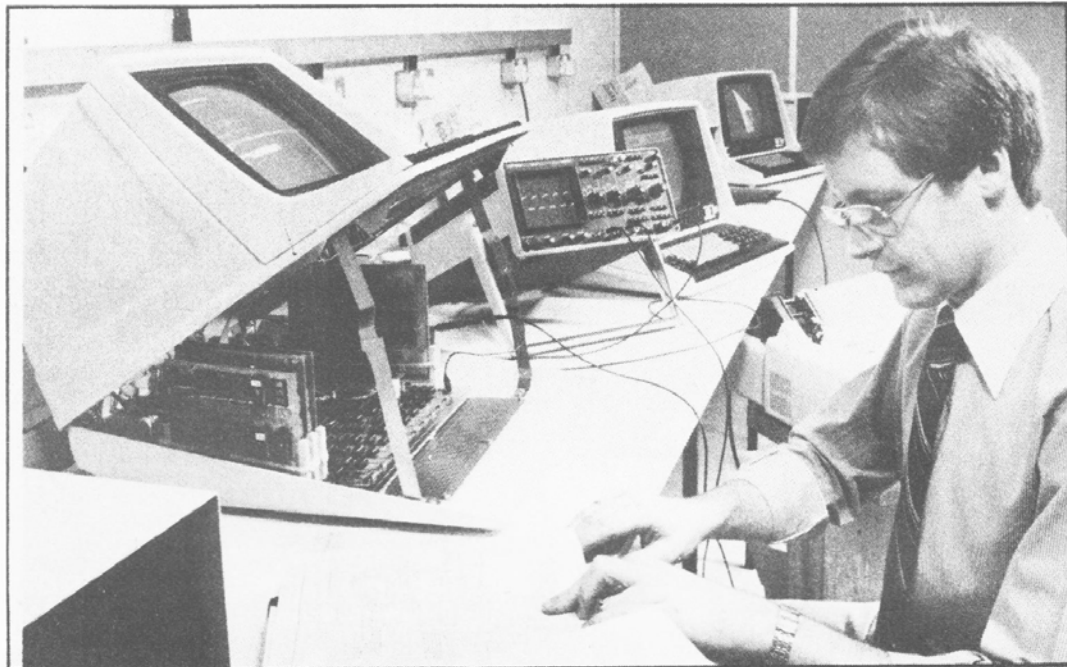

ZAKS BACK

Rodney Zaks, the man of many words, has moved to new territory with a book on the Z80. Does this mean the 6502 is dead? From the press release — we haven't got a review copy

yet — it sounds as if the book is in a similar format to his offerings on the 6502 and hopefully it won't have as many mistakes. Titled "Programming the Z80" it is obtainable from Sybex who reside at 18 Rue Planchat, F-75020, Paris and contains

625 pages. They also forgot to tell us how much it costs but your local friendly bookshop should be able to help. Sybex's UK distributor is the Computer Bookshop, Temple House, 43-48 New Street, Birmingham, B2 4LH.

SPEAK TO ME

Details of the Mk 2 version of Microspeech thudded onto my desk last week. The veritable tome was accompanied by a brief description which I shall quote verbatim. MICRO SPEECH 2 is a stand alone speech synthesizing unit. It converts phonetic code or any text (which is input via a stan-


dard RS232 connection) into a speech output. MICRO SPEECH 2 may be interfaced to any computer system because all the computation necessary to synthesize speech is performed by its own dedicated microprocessor. In fact it is possible to run the unit from just an ASCII keyboard. Up to one thousand phonetic characters, representing about one minute of speech,


may be assembled in the units internal buffer before it is commanded to speak. The controlling microprocessor has a spare ROM capability of 4K bytes which can be used to store an optional text to phonetics translator program. This includes the phonetic equivalents of all the standard ASCII symbols, and thus enables the unit to be driven directly from English text. Although the speech in this mode is not always as good as that produced in the phonetic mode, it does allow many common messages to be rapidly programmed, and it also makes the unit extremely useful to the blind.

Costronics Electronics of 13 Pield Heath Avenue, Hillingdon, Middlesex.

REVISED BUSINESS

The ECC publications series of Computer Guides has had a facelift with the re-launch of the Guide To Small Business Systems in an updated form. The 1980 guide has expanded from 250 to 900 systems ranging between £1000 and £100,000 with vital information on who supplies what, names and addresses of contacts etc all updated. Anyone who is thinking of buying a business system should consider investing the £24 for the guide as it is a useful source. Copies can be obtained direct from ECC Publications, 30-31 Islington Green, London N1 8BJ.

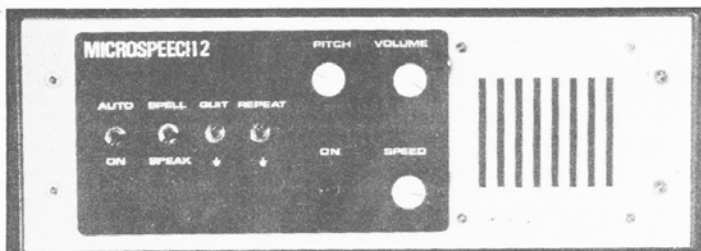

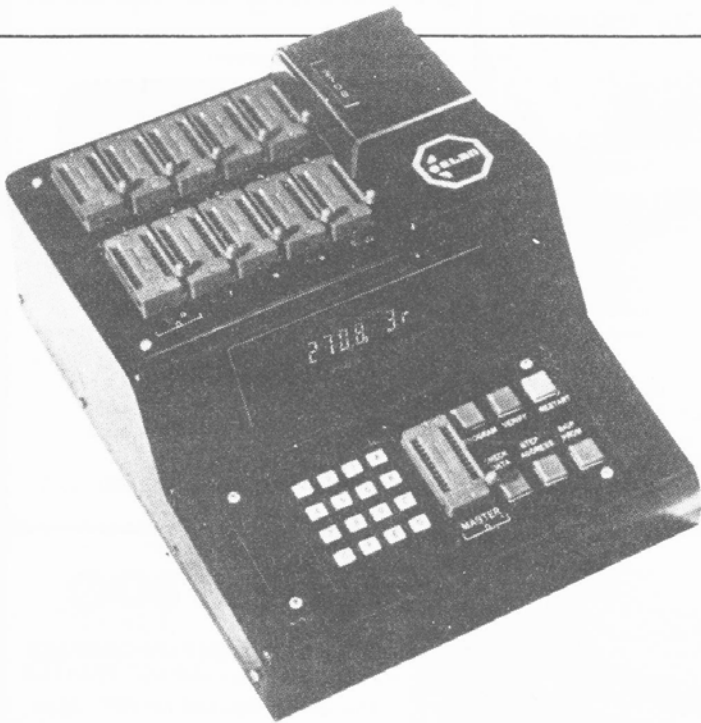

INTELLIGENT PROGRAMMER

A new PROM programmer and verifier unit has been announced by Elan Digital Systems. Called the P30 it features a degree of intelligence not previously associated with "blowing" and seems to be a useful piece of kit. It is capable of gang programming up to 20 EPROMs and it can accept all current EPROMs between 4 and 32K. It even tells you which type it expects when you turn it on. As well as all the usual data entry facilities it also has a fault verification and data manipulation-editing facility as well so you can alter the contents of the master before copying. Options are available to input data from tape or serial ports rather than a master PROM. For more detailed information you should contact EDS at 16-20 Kelvin Way, Crawley, West Sussex RH10 2TS.


AMBITEXTROUS?

The well known mail order and distribution company, Ambit, have acquired a second arm - Ambyte. Headed by Jon Burchell they have among their newly launched range an interesting memory system. Known as plated wire it combines the best of most other systems in that it is non-volatile, it uses a single 5 V supply, it's expandable, it's fast (200-400 nS), you have a non-destructive read and you can have up to 2M by 9 in a single array. Sounds better and better doesn't it. Units are available for the Z80 bus and the LSI II series and doubtless more will appear soon. Toko - the manufacturer - reckon that the ideal environment is in DP and they are currently investigating more applications with Ambyte. Find out more direct from Ambyte at 200 North Service Road, Brentwood, Essex.

SYSTEM 80 = N2


NASCOM have now announced a complete range of boards to go with the "2" to make a complete system - System 80. The extended range has a moulded case as its starting point which will take a "2" plus keyboard and four other cards as well as a PSU. The cost of the case is £85 but "1" users will not be able to make use of it unless they are prepared to do a bit of hacking. Next on the stocks is a new RAM plane (thank goodness) which offers 16, 32 or 48K of dynamic with locatable boundaries, write protect and Page mode allowing up to four 48K boards to be used on a "2", price is £225. I/O is being catered for at last with a board containing 3 PIOs, a counter timer and a UART. This is supplied as a basic board with TTL and then you buy the I/O kits you need. Prices are £45 for the board and £8.50 for each PIO, £8.25 for the counter timer and £16 for the UART. Graphics capability is being enhanced with a programmable graphics generator board at £90 and a dual standard colour graphics board that has yet to be priced but will cater for any two required colour TV systems. And, last but by no means least, on the board front we have the floppy disc controller which will be able to handle up to four 5¼" and probably 8" as well but the software support will be on 5¼"s. This board costs £127.50 and will be available in June. A full dual floppy system using double sided, double density Siemens drives will set you back £690.00. The second major news to come out of the launch

was that the "2" will be sold at £225 as of March 1st but with no on-board RAM and no free RAM board so grab those special offers quickly. The idea is that the systems people will bung firmware into the 4118 sockets and rely on the new RAM planes. If you want on-board RAM it'll cost you about £100! I resisted all the obvious leaders for this news item line "Kerrless NASCOM Launch" etc but the news is that Kerr Borland has moved on from NASCOM to form his own company - Product Launch. Almost immediately he signed up NASCOM and is now promoting their product - namely System 80. Well it's goodbye and welcome back all in one sentence.

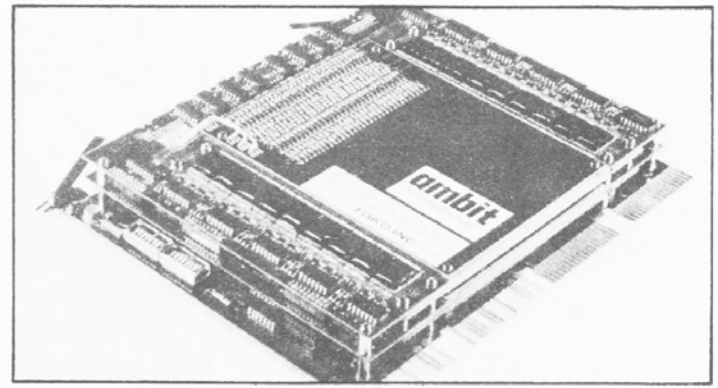

Superboard II - OHIO - Challenger 4P

At these prices why waste time and money on unauthorised kit copies?

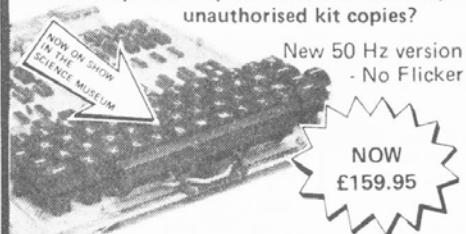


New 50 Hz version
- No Flicker

**NOW
£159.95**

610 Expansion Board 8k RAM
ONLY £159.95 + VAT
IP CD3P Minifloppy Disc, Cased, PSU,
2 copies of DOS - **ONLY £289 + VAT**
Set of 4k RAM (Superboard users only)
ONLY £28 + VAT
Plastic Case - Beige **ONLY £26 + VAT**
Challenger IP - Metal Cased, Superboard,
PSU modulator - **ONLY £208 + VAT**
Discs & Cassettes available

A major breakthrough
in price/performance
for personal/
business educational
micro's
- Single RF O/P
provides both
sound & vision
to colour TV.
(Colour sets
only).

PAL COLOUR AND SOUND




*8k Microsoft 8k User RAM *16 colours,
32 rows x 64 cols. *Programmable tone
generator and DAC *Joystick and keyboard
interface.

Challenger 4P - 8k Basic in ROM 8k RAM
expandable to 32k - **ONLY £475 + VAT**
Challenger 4P MF - Same as 4P but with Mini-
floppy 24k RAM, expandable to 48k -
ONLY £1095 + VAT
Complete range of accessories available

ZT Driving Computer

Add a new dimension to your car with cost effective fuel management.

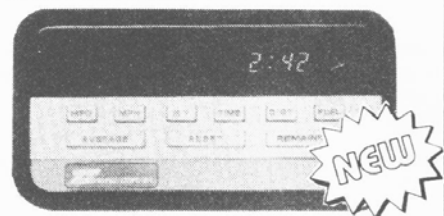


*MPH Instant *MPH average *Gals. used
since fillup *Miles to empty *Elapsed time
*Time to empty *Time on trip *Miles on trip

Accuracy: Time ± 30 secs/month
Speed ± 0.5 mph Instant
 ± 0.005 mph Average
Fuel used $\pm 3\%$


Takes about 2hrs to fit **ONLY £77.50 +VAT**

TRS80 LEVEL 2 16K

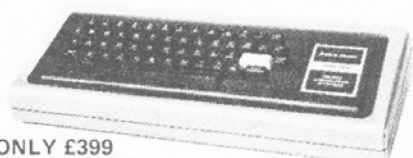

**ONLY £399
+ VAT**

Keyboard, computer, power supply, UHF
modulator and all cables to plug into your
own TV set and cassette recorder and go!
16K of user RAM for decent size programmes
and data, sophisticated level II microsoft
basic. Fully converted to UK standard.

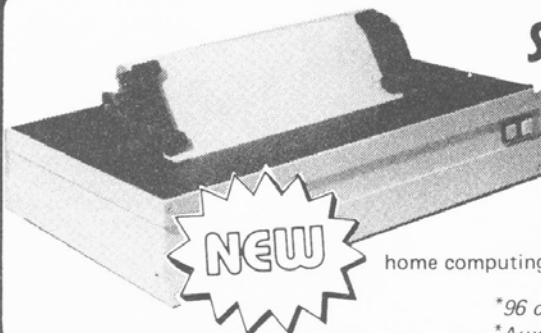

Super Print 800

80 COLUMN HIGH PERFORMANCE
IMPACT PRINTER

The ideal companion for PET, Apple,
TRS80, Exidy, Superboard, Compukit
and most Micro's

Rugged metal enclosure makes it ideal for
home computing, small business systems, data logging etc.

*96 character ASC II Standard
*Auxiliary User Defined Character Set
*Accepts 8 1/2" max. paper - pressure feed
9 1/2" max. paper - tractor feed
*Tractor & Fast Paper Feed/Graphics(model ST)


OPTION:-

*2k Terminal Buffer

Tractor & High Speed-Model 800ST

ONLY £389 +VAT

NEC Spinwriter



- for the
professional
word processing
system


£1699 + VAT

NEC's high quality printer uses a print "thimble" that
has less diam. and inertia than a daisy wheel. Giving a
quieter, faster more reliable printer than can cope
with plotting and printing (128 ASC II chs.) with up
to 5 copies, friction or tractor fed. The ribbon and
thimble can be changed in seconds. 55 chs. per sec.
bidirectional printing with red/black, bold, subscript,
proportional spacing, tabbing, and much much more.

GP MODEL 14

Eprom Eraser

**ONLY £78
+ VAT**



*14 Eprom capacity *Unit safety interlocked
to prevent accidental exposure *Erase time
(Model UV141) adjustable 5 to 50 minutes in
5 minute steps *Fast erase times typically 20
mins for 2708 Eprom *UV source output at
2537 Angstroms



SOFTY INTELLIGENT EPROM PROGRAMMER

Built or in Kit form

Connects directly
to TV. Develop,
Copy, Burn,
Verify 2708,
2716 and with
modification 2516.

Softy is a versatile product and each application will
be different by definition. When Softy is connected
via a serial (RS 232) or parallel link with any small
computer capable of supporting an assembler a
simple and capable Product Development System
is formed. For product developments with less than
2k of firmware Softy may be the only development
tool you will need.

*Fast cassette interface over 2000 baud eqv.

*Ideal Training Aid-useful control computer

*Equivalent dev. systems cost over £500+

**ONLY £120 + VAT Built & Tested
£100 + VAT Kit. £20 + VAT Built Power Supply**

Atari VCS System

Most popular top range micro-video game



Current carts. include - Air-Sea
Battle, Space War, Outlaw, Video
Olympics, Breakout, Basketball,
Surround, Blackjack, Basic Maths,
Hunt & Score, Miniature Golf,
Skydiver, Street Racer, Chess,
Backgammon and many more.

Cartridges mostly - **£13 + VAT**
Chess (8 levels) - **£39 + VAT**
Backgammon - **£30 + VAT**
Superman - **£20.80 + VAT**
Indy 500 - **£30 + VAT**

Coming Soon - BASIC Computing, Space
Invaders plus many more!

Buy a VCS, introduce a friend to buy one
and get a Keyboard FREE worth **£19**
(limited Ingersol Offer)

Atari VCS NOW **ONLY £113 + VAT**
+ your first cart. - **£6.90 + VAT** (worth £13)

Mighty Micro

In association with Watford Electronics

Please add VAT at 15%. Carriage extra, will advise at time of order. Official orders
welcome. Product details on request. Trade and export enquiries welcome.


33 CARDIFF ROAD, WATFORD, HERTS. WD1 8ED

Tel: (0923) 38923 (Sales) or 40588/9 Open 9 am to 5.30 pm Mon.-Sat.

Close to Watford Football Ground. Nearest Station - B.R. Watford.

BUY IN CONFIDENCE - In the event that we are unable to deliver your goods within 7 days, we
do not bank your remittance until such time as we have the goods to despatch. If on receipt of
your order the goods do not meet with your satisfaction, return within 7 days for full refund.



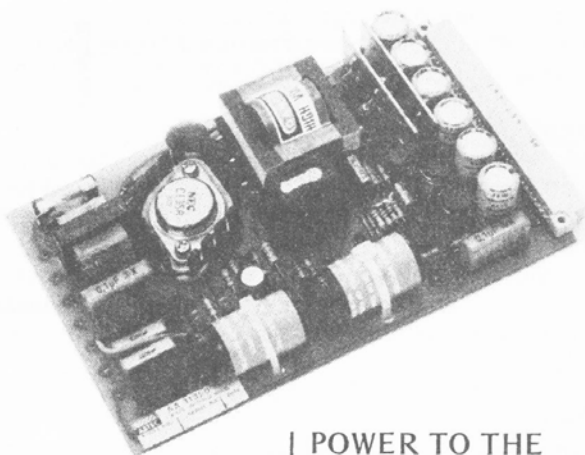

VERSATILE INTERFACE

A new interface unit for the Commodore PET has been launched by Allen Computers of 16 Hainton Avenue, Grimsby, South Humberside. The system combines both hardware and software techniques and can be used on any model PET. Output can be in serial or parallel mode but input is serial only, formats are RS232, V24 and 20 mA at speeds of up to 240 cps. The machine code routine needed can be stored anywhere in RAM. Price of the unit is £70 plus VAT and includes post and packing.

POWER TO THE PEOPLE

Astec, the makers of modulators, have added two new items to their range in the shape of Eurocard size voltage regulators. Both use switch mode and have a number of features which make them suitable for MPU systems. The AA1135A supplies +5 at 3 A and +12 at 1.2 A, the B version has two floating 5 volt, 3 A supplies which can be connected in series or parallel if required. Prices start at £44.90 ex VAT for one-offs of either type and decrease to £35.40 with quantities over 100. If you think this is the supply you need then contact Astec at 4A Sheet Street, Windsor, Berkshire.

APPLE OK

The Prestel card that we mentioned last month for the Apple is one step nearer to PO approval after the Communications card — on which it is based — received approval for Datel 200 connection. Apple owners with this card may now connect to the various nationwide networks through a PO modem. The second offering from Microsense in a matter of weeks is Apple Writer, a word processing package. Requiring

a system with disc and 48K of RAM, the software costs a mere £42 and is said to be capable of most simple text handling functions. Systems with printers will be able to get hard copy output but you can always pass the discs to a central printer. The software comes on two diskettes and a tutorial and operating manual is supplied. For more information on the whole range of Apple goodies contact Microsense Computers at Maxted Road, Maylands Avenue, Hemel Hempstead, Herts HP2 7LE.



AIMING TO EXPAND

The AIM 65 single board computer can now be expanded to have an extra 32K of RAM in a free standing unit. Called AIMEM it has a built-in power supply and costs £335 plus VAT. Although it is intended for use on the AIM it should be possible to use it on any system based around the Motorola Exorciser bus system or its derivatives. Also rumoured to be coming for the AIM in the very near future is a VDU board, someone obviously read the CT review! For details of AIM and its associated peripherals including AIMEM contact Portable Microsystems at Forby House, 18 Market Place, Brackley, Northants.


BEGGING YOUR PARDON

Our highly popular program suite, The Fall Of Rome, has run into a problem. The program called Space Invaders actually runs on a Level 5.2 Triton but can be run on any Level of Triton with mods. The name "Space Invaders" is in fact the copyright of Taito Electronics Ltd and we apologise to them for its use without

permission. We ran a news item last month on some shops that have been expanding recently and one of them was Midwich. No sooner had we put the address on the page than we received a note telling us that they have moved again! All enquiries about their range of Nanocomputer and other SGS Ates kit should go to 9 Churchgate Street, Old Harlow, Essex CM17 0JS. Their new telephone number is 0279-411226.

ALL THE FUN OF THE FAIR

All people who are young at heart should make a note of the following dates, July 3, 4 and 5. That is when this year's Young Computing Funfair takes place at the West Centre Hotel in London. After last year's success and the opening recently of the "Challenge of the Chip" exhibition it could well turn out to be a young persons Compec. Further information can be obtained directly from the organisers, Couchmead Ltd at 42 Great Windmill Street, London W1V 7PA.

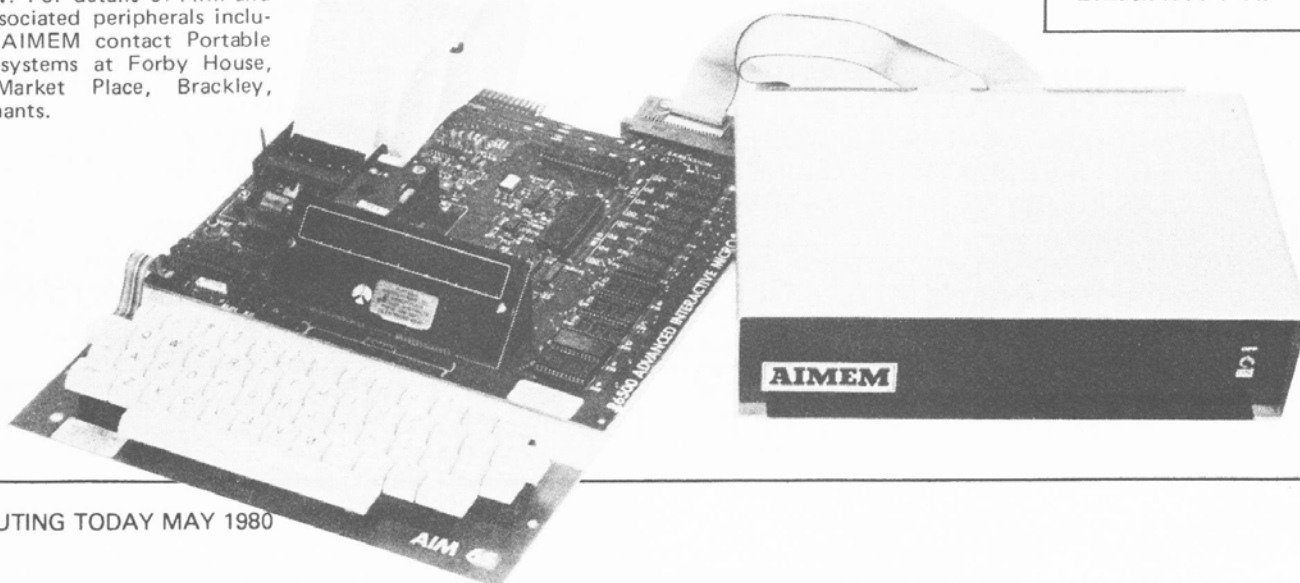

Can the TRS-80 equal Picasso, do we really care? Have fun with this graphic example of the Trusty 80s flexibility.

To those who in days of yore, that's before central heating if you're young. . . were wont to stare dreamily into the flames, conjuring fabulous fairylands from amongst the glowing coals. . . or perhaps lay warm and snug abed as nymphs and demons smiled and sneered from heavy patterned walls. . . and even those whose bent it is to dream of fortune told by leaves left in the dregs. . .

I dedicate this computerised crystal ball that it may stimulate your imagination and bring visions of oriental palaces. . . Aladdin's Caves. . . temples. . . minarets. . . altars. . . dancers. . . demons. . . shamans. . . witch-doctors. . . and every conceivable pattern that man has tortuously devised since first he gained the faculty of wonder.

You will recognise Aztec. . . Mayan. . . Amer-Ind. . . Arabian. . . Siberian. . . Oriental. . . Polynesian. . . an infinite gamut (if I may use a contradiction in terms) of pattern, in this pageant of true computer originated art.

To conclude this eulogy may I express my very deepest regrets that those of you whose misfortune it is to

own inferior machines such as PET, Apple, Sorcerer, etc., cannot share an experience we favoured TRS 80 level II users take so much for granted.

Observations

Joshing aside, there are few micros that could run this program using BASIC on a 30 x 30 format. . . the TRS could use 48 x 128, though the time would be rather inhibitive without resort to machine code.

Since writing same, I have found that the rather long wait for program interrupt to operate can be reduced to a near immediate response by altering tail end of line 90 to read. . .

```
NEXT Y: A$=INKEY$: IF A$="1" THEN 120 ELSE
NEXT X
```

This modification adds slightly less than 1 sec to pattern loop, and for the impatient may be preferred. I found the delay bearable as I used the time to ready the trusty cassette and sacrificed everything to maximum speed in pattern cycle.

Those that demean the TRS performance should note that if the padding were removed and pattern taping facility omitted, the whole program could be run in *seven* succinct lines by placing line 10 at beginning of line 50. Or, by relinquishing control of provocateur bars, *only five lines* would suffice, by joining line 10 to line 70 and ending at line 110.

So go to it, enter program, place video next to family TV and run (not from the family, as the TRS's dead silent).

```
10 CLEAR 2000:CLS:DEFINTX,Y,S,N,P,Q,I,J,K,G:X=
39:Y=44:DIM S(X,Y),A$(30):I=7:P=26:Q=32
20 PRINT@452,CHR$(23)"-:- COMPUT=A=PATTERN
-:-":FOR L=1 TO 3000:NEXT:CLS:PRINT"[2x
SPC]SINCE THE DAWN OF INTELLIGENCE MAN
HAS BEEN FASCINATED BY PATTERNS.[2xSPC]
HERE IN ONE PACKAGE YOU WILL FIND
EXAMPLES FROM MAYAN. .AZTEC. .AMER-IND.
.SIBERIAN. .ORIENTAL. .";
30 PRINT"THE ENTIRE GAMUT OF MANKIND.[LF]
ALLOW YOUR IMAGINATION TO ROAM IN THIS
NIGH INFINITE SERIES AND YOU WILL SEE
PALACES. .TEMPLES. .ALTARS. .MINARETS. .
DEMONS. .DANCERS. .NYMPHS. .SHAMANS. .
WITCH-DOCTORS. .AND PRINCES FROM";
40 PRINT"THE FAIRYLAND OF ARABIAN NIGHTS.
[CR][2xSPC]EACH PATTERN WILL REMAIN ON
SCREEN FOR 1 MIN. 12 SECS. *** TO HOLD,
RECORD, OR PLAYBACK A PATTERN, PRESS
KEY 'I' DURING OPERATION AND INSTRU-
50 INPUT"THE PATTERN PROVOKING BARS HAVE
BEEN SET. . .BUT YOU MAY VARY THEIR
POSITION BY ENTERING NUMBERS BETWEEN
-10 AND +10 FOR FIRST RUN TRY ENTERING
0,0 NOW";J,K:CLS:P=P+J:IF P < 16 OR P > 43 P=26:
GOTO 50
60 Q=Q+K:IF Q < 16 OR Q > 43 Q=32:GOTO 50
70 FOR X=9 TO 40:SET(X,14):SET(X,45):NEXT:FOR
Y=14 TO 45:SET(9,Y):SET(40,Y):NEXT
80 IF I > 5 I=0:FOR N=19 TO 30:SET(N,P):SET(N,Q):
NEXT
90 FOR X=10 TO 39:FOR Y=15 TO 44:S(X,Y)=POINT
```

```
(X-1,Y-1)+POINT(X-1,Y)+POINT(X-1,Y+1)+
POINT(X,Y-1)+POINT(X,Y+1)+POINT(X+1,Y-1)+
POINT(X+1,Y)+POINT(X+1,Y+1):NEXT Y,X:A$=
INKEY$:IF A$="I" THEN 120
100 I=I+1:G=G+1:PRINT@0,"PATTERN. . ."G"
PROVOCATEUR BARS. . "J" & "K"[14xSPC]":FOR
X=10 TO 39:FOR Y=15 TO 44:IF S(X,Y) > -2 OR
S(X,Y) < -3 THEN RESET(X,Y) ELSE IF S(X,Y)=
-3 SET(X,Y)
110 NEXT Y,X:GOTO 80
120 PRINT@0,"* HOLDING * PRESS A TO RESUME.
* IS RECORDER READY. . ? * PRESS P TO PLAY
BACK. . R TO RECORD.
130 A$=INKEY$:IF A$="A" THEN 80 ELSE IF A$="R"
THEN 140 ELSE IF A$="P" THEN 170 ELSE 130
140 FOR X=1 TO 30:FOR Y=15 TO 44:IF POINT(X+9,
Y) THEN U=1 ELSE U=2
150 A$(X)=A$(X)+STR$(U):NEXT Y,X
160 FOR X=1 TO 25 STEP 4:PRINT#-1,A$(X),A$(X+1),
A$(X+2),A$(X+3):NEXT:PRINT#-1,A$(29),A$(30),
G,I,P,Q,J,K:FOR X=1 TO 30:A$(X)="" :NEXT:
PRINT@0,"*** PLEASE SWITCH RECORDER OFF
NOW. ***[19xSPC]":GOTO 80
170 FOR X=1 TO 25 STEP 4:INPUT#-1,A$(X),A$(X+1)
,A$(X+2),A$(X+3):NEXT:INPUT#-1,A$(29),A$(30)
,G,I,P,Q,J,K:FOR X=1 TO 30:D=-1:FOR Y=15 TO
44:D=D+2:IF MIDS((A$(X)),D,1)="1" THEN S(X+9,
Y)=1 ELSE S(X+9,Y)=0
180 NEXT Y,X:FOR X=10 TO 39:FOR Y=15 TO 44:IF
S(X,Y)=1 THEN SET(X,Y) ELSE RESET(X,Y)
190 NEXT Y,X:FOR X=1 TO 30:A$(X)="" :NEXT:
PRINT@0,"*** PLEASE SWITCH RECORDER OFF
NOW. ***[19xSPC]":GOTO 80
```


TECHNICAL BOOK SERVICE

What Is A Microprocessor? £12.00
2 Cassette tapes plus a 72 page book deal with many aspects of microprocessors including Binary and Hexadecimal counting, Programming etc.

Adams, C. BEGINNERS GUIDE TO COMPUTERS AND MICROPROCESSORS WITH PROJECTS £6.05
Understanding building programming and operating your own microcomputer.

Ahl, BASIC COMPUTER GAMES £5.40

Albrecht, B. BASIC FOR HOME COMPUTERS. A self teaching guide £5.45
Shows you how to read, write and understand basic programming language used in the new personal size microcomputers.

Albrecht B. BASIC. A self teaching guide (2nd edition) £5.45
Teach yourself the programming language BASIC. You will learn how to use the computer as a tool in home or office and you will need no special maths or science background.

Alcock, D. ILLUSTRATING BASIC £3.00
This book presents a popular and widely available language called BASIC, and explains how to write simple programs.

Altman, I. MICROPROCESSORS £10.80
Gives a general overview of the technology design ideas and explains practical applications.

Altman, L. APPLYING MICROPROCESSORS £15.50
Follow-up volume which takes you into the second and third generation devices.

Aspinall, D. INTRO TO MICROPROCESSORS £6.55
Explains the characteristics of the component.

Barden, W. Z-80 MICROCOMPUTER HANDBOOK £7.75

Barden, W. HOW TO BUY AND USE MINICOMPUTERS AND MICROCOMPUTERS £7.90
Discusses these smaller computers and shows how they can be used in a variety of practical and recreational tasks in the home or business.

Barden, W. HOW TO PROGRAM MICROCOMPUTERS £7.25
This book explains assembly language programming of microcomputers based on the Intel 8080, Motorola MC6800 and MOS Technology MCS6502 microprocessor.

Bibbero, R.J. MICROPROCESSORS IN INSTRUMENTS AND CONTROL £12.60
Introduces the background elements, paying particular regard to the dynamics and computational instrumentation required to accomplish real-time data processing tasks.

Lancaster, D. TV TYPEWRITER COOKBOOK £7.75
An in-depth coverage of TV typewriters (TVs) the only truly low cost microcomputer and small display interface.

Lancaster, D. CHEAP VIDEO COOKBOOK £6.50

Lesea, A. MICROPROCESSOR INTERFACING TECHNIQUES £8.70

Leventhal. INTRO TO MICROPROCESSORS £17.00

Lewis, T.G. MIND APPLIANCE HOME COMPUTER APPLICATIONS £4.90

Hilburn, J.L. MICROCOMPUTERS, MICROPROCESSORS, HARDWARE, SOFTWARE AND APPLICATIONS £17.40
Complete and practical introduction to the design, programming operation, uses and maintenance of

modern microprocessors, their integrated circuits and other components.

Klingman, E. MICROPROCESSOR SYSTEMS DESIGN £16.95
Outstanding for its information on real microprocessors, this text is both an introduction and a detailed information source treating over a dozen processors, including new third generation devices. No prior knowledge of microprocessors or microelectronics is required for the reader.

Kemeny, J.G. BASIC PROGRAMMING £6.70
A basic text.

Korn, G.A. MICROPROCESSOR AND SMALL DIGITAL COMPUTER SYSTEMS FOR ENGINEERS AND SCIENTISTS £19.45
This book covers the types, languages, design software and applications of microprocessors.

Duncan. MICROPROCESSOR PROGRAMMING AND SOFTWARE DEVELOPMENT £14.15

Rao, G.U. MICROPROCESSOR AND MICRO-PROCESSOR SYSTEMS £20.75
A completely up-to-date report on the state-of-the-art of microprocessors and microcomputers written by one of the leading experts.

Rony, P.H. THE 8080A BUGBOOK: Microcomputer Interfacing & Programming £8.35
The principles, concepts and applications of an 8-bit microcomputer based on the 8080 microprocessor CPU chip. The emphasis is on a computer as a controller.

Scelbi. 6800 SOFTWARE GOURMET GUIDE AND COOKBOOK £8.90

Scelbi. 8080 SOFTWARE GOURMET GUIDE AND COOKBOOK £8.90

Scelbi. UNDERSTANDING MICROCOMPUTERS £8.75
Gives the fundamental concepts of virtually all microcomputers.

Spencer. GAME PLAYING WITH BASIC £4.85

Schoman, K. THE BASIC WORKBOOK £3.85
Creative techniques for beginning programmers.

Sirion, D. BASIC FROM THE GROUND UP £6.20

Soucek, B. MICROPROCESSORS AND MICROCOMPUTERS £19.40
Here is a description of the applications programming and interfacing techniques common to all microprocessors.

Spracklen, D. SARGON £9.90
A computer chess program in Z-80 assembly language.

Titus. MICROCOMPUTER ANALOGUE CONVERTER £7.60

Titus. 8080/8085 SOFTWARE DESIGN £7.60

Tracton. 57 PRACTICAL PROGRAMS & GAMES IN BASIC £6.65
Programs for everything from Space war games to Blackjack.

Waite, M. MICROCOMPUTER PRIMER £6.40

Waite. YOUR OWN COMPUTER £1.60
Introduces the beginner to the basic principles of the microcomputer.

Libes, S. SMALL COMPUTER SYSTEMS HANDBOOK £6.00

Note that all prices include postage and packing. Please make cheques, etc., payable to Computing Today Book Service (Payment in U.K. currency only please) and send to:
Computing Today Book Service,
145, Charing Cross Road,
London WC2H 0EE.
Prices may be subject to change without notice.

BOOK £5.90
The Primer written for those new to the field of personal home computers.

Lippiatt. ARCHITECTURE OF SMALL COMPUTER SYSTEMS £4.50

Moody, R. FIRST BOOK OF MICROCOMPUTERS £3.85
(The home computer owners best friend).

McGlynn, D.R. MICROPROCESSORS — Technology, Architecture & Applications £9.20
This introduction to the computer-on-a-chip provides a clear explanation of the important new device.

McMurrin, PROGRAMMING MICROPROCESSORS £5.50
A practical programming guide that includes architecture, arithmetic/logic operations, fixed and floating point computations, data exchange with peripheral devices, computers and other programming aids.

Monro, INTERACTIVE COMPUTING WITH BASIC £3.65

Nagin, P. BASIC WITH STYLE £4.15
Programming Proverbs. Principles of good programming with numerous examples to improve programming style and producing.

Ogden. SOFTWARE DESIGN FOR MICROCOMPUTERS £7.20

Ogden. MICROCOMPUTER DESIGN £7.25

Peatman. MICROCOMPUTER BASE DESIGN £5.70

Peckham. HANDS ON BASIC WITH A PET £9.00

Peckham. BASIC — A HANDS ON METHOD £6.95

Bursky, D. MICROCOMPUTER BOARD DATA MANUAL £6.00

Coan, J.S. BASIC BASIC £7.50
An introduction to computer programming in BASIC language.

Coan, J.S. ADVANCED BASIC £7.30
Applications and problems.

Ditlea. A SIMPLE GUIDE TO HOME COMPUTERS £4.10

Freiberger, S. CONSUMERS GUIDE TO PERSONAL COMPUTING AND MICROCOMPUTERS £5.75

Gilmore, C.M. BEGINNERS GUIDE TO MICROPROCESSORS £4.90

Grossworth. BEGINNERS GUIDE TO HOME COMPUTERS £4.50

Gosling, R.E. BEGINNING BASIC £3.45
Introduces BASIC to first time users.

Graham, N. MICROPROCESSOR PROGRAMMING FOR COMPUTER HOBBYISTS £7.15

Hartley. INTRODUCTION TO BASIC £2.80


Heiserman, D.L. MINIPROCESSORS FROM CALCULATORS TO COMPUTERS £4.95

Ward. MICROPROCESSOR/MICROPROGRAMMING HANDBOOK £6.00
Authoritative practical guide to microprocessor construction programming and applications.

Veronis. MICROPROCESSOR £13.00

Zaks, R. INTRODUCTION TO PERSONAL AND BUSINESS COMPUTING £8.60

Zaks, R. MICROPROCESSORS FROM CHIPS TO SYSTEMS £8.30

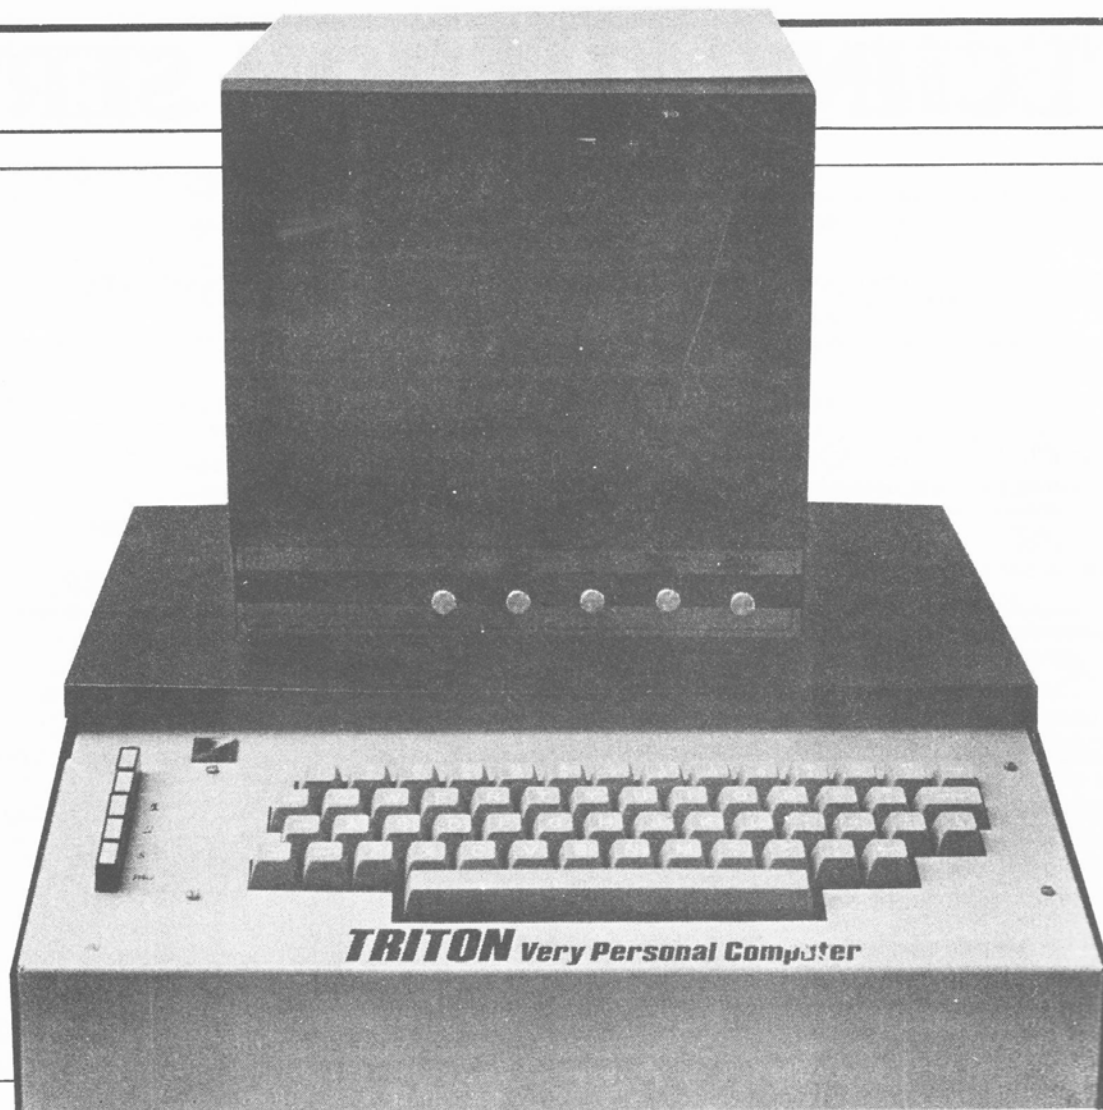

Continuing our series of owners reports on popular home computers we put the Triton under the microscope.

My personal interests often seem to have called for a means whereby data might be collated, stored and edited. In 1968 I ventured to enquire the cost of a used computer suited to the tasks I had in mind. For the price quoted I could today buy some two hundred Triton kits! Needless to add, computing did not enter my life at that stage. Ten years then elapsed until, in November 1978, I happened to spy the current edition of Electronics Today International which boldly proclaimed the Triton project at a price within the realms of reality whilst at the same time providing the opportunity to undertake a worthwhile construction project. A visit to Transam's shop followed but, chiefly as a result of my total ignorance of the working of computers, I was really no nearer being able to decide whether Triton would do for me what I hoped. However, I resolved to take a chance on what was in any case an exciting project and ordered a kit. Component shortages and apparently unforeseen demand stretched a quoted delivery time of two-and-a-half weeks to something over two months.

Getting It Together

Construction presented no major problems but with over two thousand connections to make on the main board, patience is vital! The suggestion in the manual that the project can be

completed "in a couple of evenings" is optimistic for all but the most experienced constructor.

The manual (116 pages) is well written, progressing from construction through operating details to simple machine-code and more extensive Tiny BASIC programming. The instruction for connecting the keyboard strobe was, to me at least, unclear. I feel this is worth mentioning as it is possible to run both Levels 4 and 5 BASIC wrongly connected but Level 6 (Floating-Point) will produce random 'STOP' messages under the same conditions. The GR756 keyboard as supplied requires the strobe connection next to B1 (Bit 1) — top-right on the connector diagram.

Much to my surprise the computer worked on first test! On fitting everything into the case some difficulties were encountered. Some of the screw-holes in the cover did not align with those in the base and enlargement with a small file was necessary. The keyboard was fractionally longer than the bracket into which it was to be fitted and a narrow strip was therefore sawn off its PCB — without any dire effects — fortunately! The five push-button switches as supplied were all of the push-to-make, push-to-break type and three of these had to be opened up to remove the toggle to convert to simple push-to-make operation for Reset, Interrupt 1 and Interrupt 2.

TRITON REVISITED

Now cased and operational, all was well until some ten minutes had passed when the screen display began to break up. I was using a CCTV monitor, without the on-board modulator. The VDU control chip (SFC96364) immediately became suspect and proved to be temperature-sensitive. This was replaced by Transam without question. No further problems have been experienced with the original main-board components.

The final step in the setting-up procedure was to connect the cassette recorder. Here I had the distinct advantage of being able to borrow a "Neal" transcription recorder from my Hi-Fi set-up! This enabled faultless recording from the start (defects in tape excepted). Furthermore I have been able to increase the baud rate to maximum (about 500) without any problems thus giving a reduction in transfer time of more than 50% (for own tapes only, of course). I find that the use of high quality Chromium-dioxide cassettes reduces drop-out to negligible proportions.

Level 4 Software

The original Level 4 monitor (seven functions) includes a 'named file' search in the monitor for cassette input (with a relay for software control of the recorder motor) and also machine-code programming facilities. Use of the 'Reset' button results in '00' being written into all RAM locations which can be very inconvenient if there is no alternative following a program 'crash'. The Tiny BASIC provides adequate scope for a beginner, but the lack of decimal arithmetic became the chief frustration (as an accountant I was formulating ideas for financial programs). Both monitor and BASIC (Level 4) are contained in three 2708 EPROMs on the main board. Also included are 64 graphic

characters in ROM which can be displayed in any screen position under program control (memory-mapping).

Growing Triton

The expansion Motherboard and 8K RAM card were announced in Computing Today March 1979. Buffer supply problems delayed completion but construction was straightforward, although the cable connecting Triton and Motherboard called for considerable care. Fixing instructions for the bridge rectifier were not specified in the article mentioned above. This should be bolted to the case or a suitable heat-sink to allow good heat dissipation.


Construction of the 8K RAM card is straightforward and takes an hour or so. This was fitted to the Motherboard and patience rewarded on powering-up and finding nearly 11000 bytes available (the main board holds 2.5K user RAM).

Level 5 Software


The Level 5 monitor and Extended Tiny BASIC soon followed as described in Computing Today (June and September 1979). The main attraction for me of this new monitor was the serialised printer output set at 110 baud on initialisation but software-controllable (both by machine-code and BASIC).

The 'Reset' button no longer destroys memory but clearance and testing of RAM is still optional. In this and subsequent monitors, use of 'Interrupt 2' displays the register contents of the microprocessor.

Level 5 Extended Tiny (Integer) BASIC includes the additional Edit, Peek, Poke, Read, Write and Call instructions and is contained with the monitor in four 2708 EPROMS

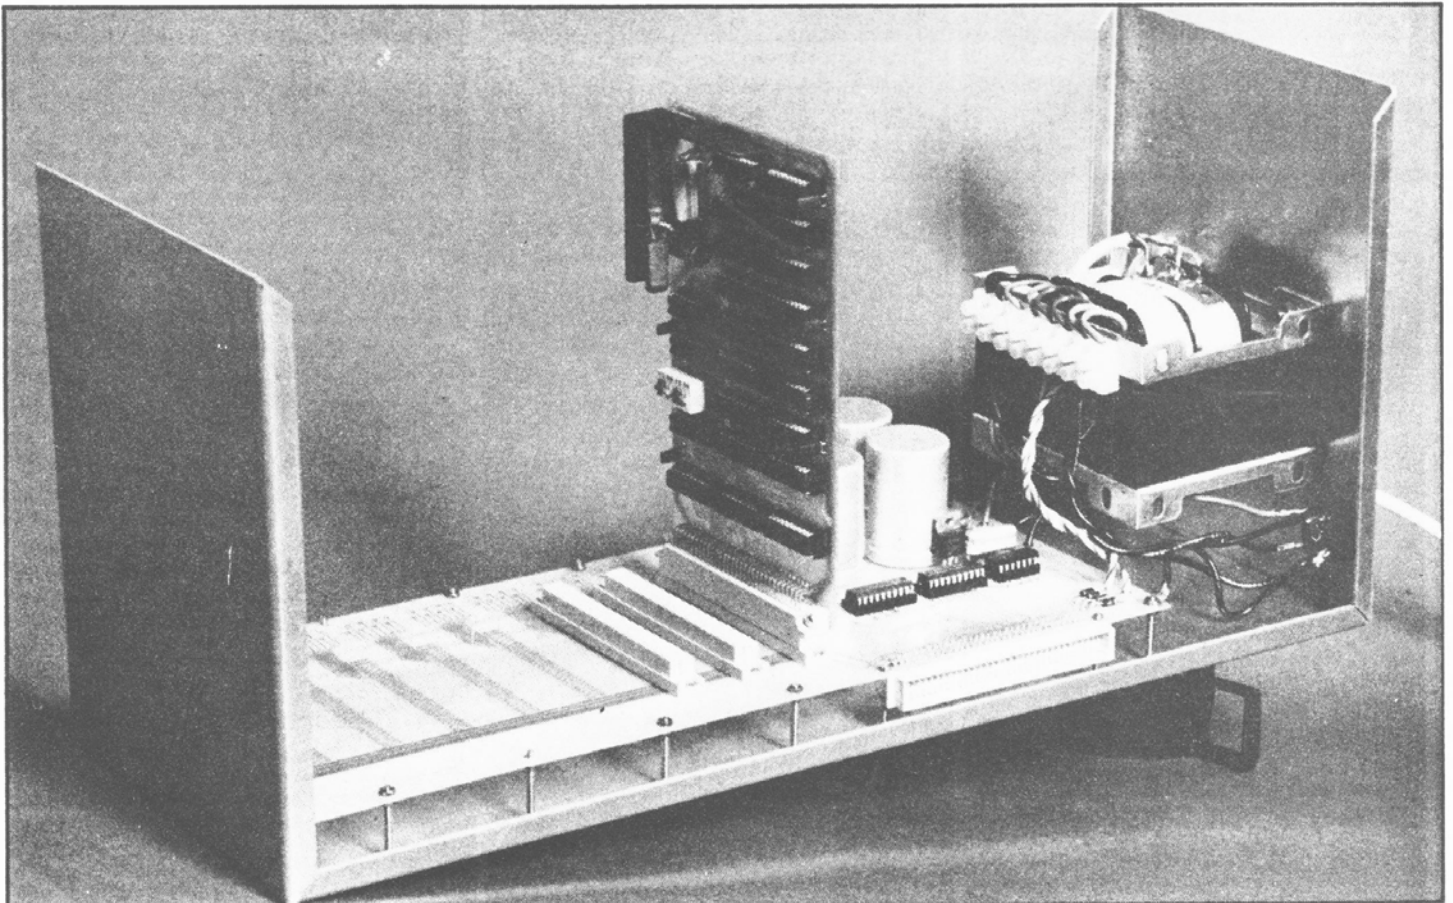

Triton's motherboard assembly fitted with an 8K RAM plane.

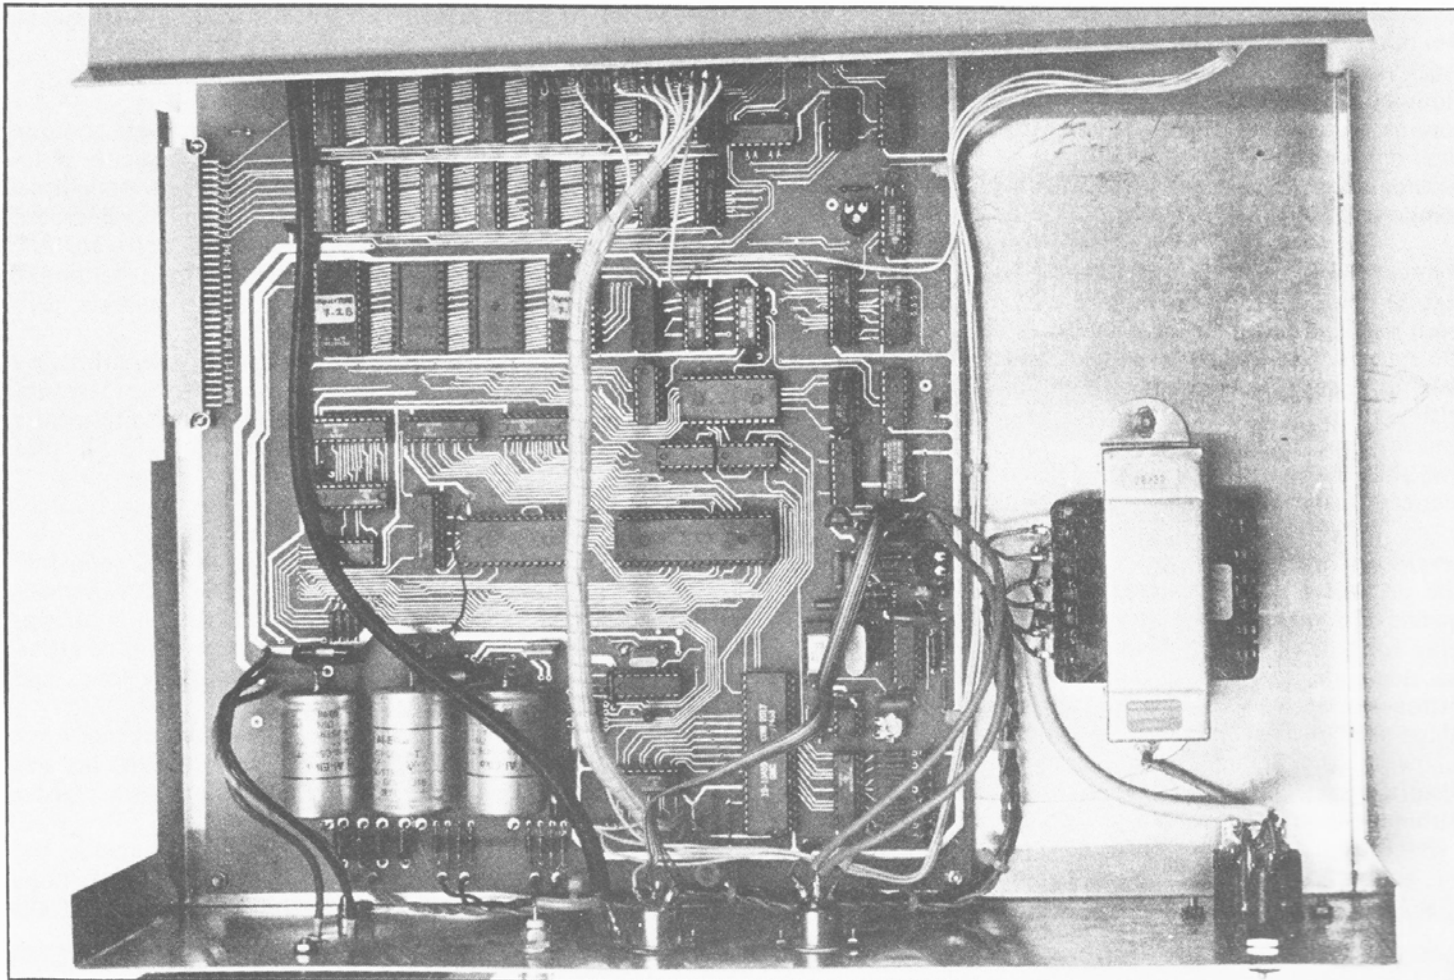

The internals of our office Triton, fitted with Level 7.2 and using a monitor rather than a TV.

which are housed on the main board. For anyone considering starting with Tiny BASIC there now seems to be little point in considering Level 4. Level 5 offers much more for the additional cost of one EPROM.

The printer switch can be 'POKED' at any point in a program thus allowing printed input as well as output. This facility is retained in Levels 6 and 7 BASIC also.

Going Into Print

Choosing a printer became the next priority. The latest machines were expensive but a used Teletype seemed an economical alternative. A second-hand model 33KSR was therefore purchased. A 20 mA current loop interface was needed and the circuit specified in the Level 5 monitor documentation built at a cost of 65 pence!

Of the Teletype's four connecting wires, the input pair were identified as those which produced a response from the machine when shorted together. These were connected to Triton and on typing the letter V in response to the monitor's prompt the message was again tapped out by the Teletype — much to my joy and satisfaction! The hard-copy lacks lower-case and graphics but is entirely accurate although the printing speed of 10 characters per second is slow by current standards.

For the benefit of would-be purchasers of elderly Teletype machines I would mention that thorough lubrication is necessary because, being so complex, seizure of the working parts can occur on being left unused for a long period.

Triton's Second Daughter

The 8K EPROM card was announced in *Electronics Today* for June 1979. This plugs into the Motherboard. It was constructed without difficulty in anticipation of the scientific BASIC and assembly package which were to become available later. There seems to me, however, to be a minor fault in the design of the 8K EPROM card. The -5 V regulator, although sharing the same heatsink as the two positive regulators, must of course be insulated. The electrical insulation does, however, provide effective thermal insulation also and this gave rise to problems which were, happily, completely cured by fitting the negative regulator with its own small aluminium heatsink.

Level 6 Software

The Level 6 Floating-point BASIC in seven 2708's became available in June 1979 and was fitted to the completed EPROM card. This provides the BASIC programmer with the scope to venture into the commercial and scientific world. The added facility of being able to format numerical output to the desired number of decimal places, with trailing zeros makes this the ideal BASIC for financial programming (to six significant figures). String handling is, however, not available and the running speed won't break any records! Error messages are conveniently presented in English rather than as coded abbreviations (Level 7 also).

Unlike Levels 4 and 5, cassette load and save is performed by BASIC although the monitor still retains a tape input/output routine which is restricted to data at address

TRITON REVISITED

1602H upwards. This seems to be a legacy from the previous Levels 4 and 5 which located Tiny BASIC start of text at 1602H. Would it not be more useful to enable start and end addresses to be specified in the monitor tape routines? This would permit easy loading of, for example, the Level 6 BASIC Interpreter for those who might prefer to use cassette rather than EPROMs for storage (likewise Level 7). After all, Transam sell listings of their software and if you have the patience to type some 7 or 8 thousand bytes into memory the cost, compared to EPROMs is minimal. When operating in Level 6 BASIC, machine code programs can be saved simply by specifying start and end addresses (in decimal). Using this facility, BASIC programs can be taped complete with all variables (these are stored at the top of the usable RAM which can be truncated by program as required). My own personal accounting program, in *Computing Today* October 1979, uses this facility to store account balances.

August 1979 saw the arrival of the Level 6 monitor with no less than 25 functions! Control and formatting for the printer remains unchanged but there is the added advantage that output is also displayed on the screen, thus providing the useful option of a "slow-motion" display. An alternative version of the monitor is also available for driving a high-speed parallel printer.

Single key-stroke access to BASIC is included, either for clearance or retention of program, as well as to the new Triton Resident Assembly-language Package ("TRAP").

TRAP It With Triton

Occupying a full 8K EPROM card, "TRAP" allows extensive text editing and machine-code programming facilities. The assembler and dis-assembler use standard 8080 Intel mnemonics and provide optional printer output. I have only one small grumble about this otherwise excellent package, namely, when printing an assembly listing there is insufficient delay for the Teletype's carriage return. On a short line there is little effect: on a long line overprinting of the first few characters occurs (the Teletype has no buffer and prints as the characters are output).

Machine code input is possible with all the Triton monitors, but "TRAP" is a must if you fancy direct manipulation of the CPU combined with the convenience of using

the 8080 instruction set command words (see article in *Electronics Today* for December 1978). Trace, Single-stepping and Breakpoints are all present to help with de-bugging. The editor, under control of which assembly language programs are formulated, is equally useful for word-processing. This article was originally produced in this way, being temporarily stored on cassette then added to and edited on numerous occasions until being printed by the Teletype.

The announcement in December 1979 of Level 7 Extended BASIC, Level 8 Pascal compiler and the Level 9 CP/M disc system must undoubtedly establish Triton as one of the most versatile microcomputers available and it is this aspect which must be significant when considering Triton's position in relation to the obvious competitors.


For those who may be interested in updating their software it is worth mentioning that Transam will exchange or re-program your EPROMs, subject to a small service charge. I feel, however, that this might well be a mixed blessing — an erased and possibly much used 2708 must necessarily be potentially less reliable than a brand new device but on balance the arrangement is financially attractive.

Level 7 Software

The Level 7 (8K) BASIC is fast and has an extensive range of commands and functions. Worthy of mention is 'GET' which reads the keyboard without use of the return key and 'TRACE' which displays the number of each line as it is executed to help with de-bugging programs.


The ability to load and save arrays at any time under program control provides extensive data processing capability. Cassette files can be identified by headers (or not) as required and there is the advantage (compared with Levels 4, 5 and 6) that a load operation is not aborted to the command state when an error is detected, thus providing the opportunity to list the input and attempt a correction.

A further innovation is that a BASIC program will run automatically on completion of loading from cassette. Numerical data can be specified in either hexadecimal or decimal form but it seems unfortunate (from my point of view) that the figure-formatting available in Level 6 has not been incorporated; for example, a figure of five pounds

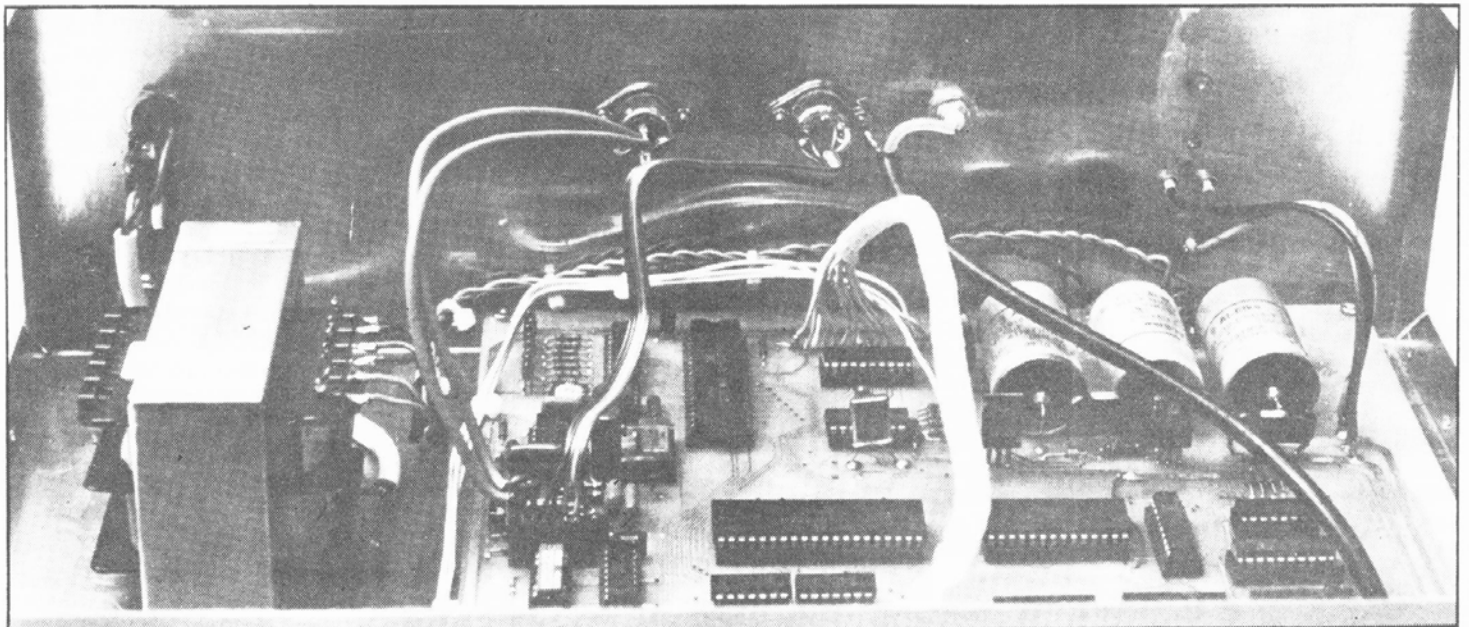


The rear panel socketry leaves a lot to be desired. The waste at a parallel port on LEDs can be overcome by using it to drive a printer.

TRITON REVISITED

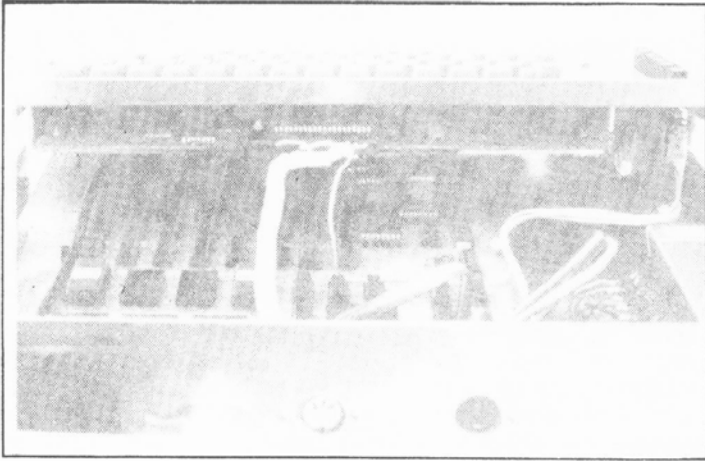

CTs solution to the switches can be seen top right, a PCB!

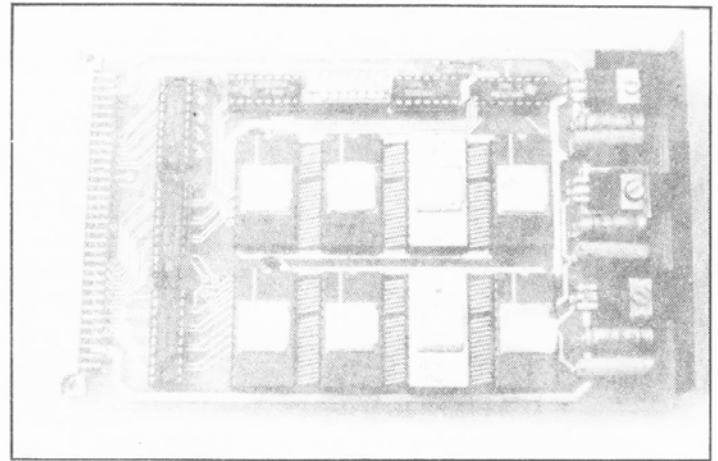

Level 7.2 BASIC needs a card all of its own, and a motherboard!

prints simply as '5' whereas in Level 6 it can be printed as '5.00' thus making for much tidier financial programming. A characteristic of this, and probably other, BASICs is the occasional emergence of very small mathematical inaccuracies. This feature was very ably illustrated by Mr. Lusty in the January 1980 edition of *Computing Today*. Whilst generally of little or no consequence, havoc can be wreaked in financial programs. Fortunately the solution is simple and consists of rounding the value of variables or output to the required number of decimal places. The Level 7 documentation gives the formula which can be specified as a 'user function' for both convenience and economy of memory space.

Control of the printer remains unchanged except that the conventional command 'LPRINT' has been included. This only directs output to the printer for the line specified. String-handling is well supported with eleven functions, for the benefit of anyone who is unfamiliar with the terminology, a 'string' is a sequence of alphabetical and/or numerical characters (e.g. a word) which can be recognised in whole or in various parts by the program. All aspects considered, the Level 7 monitor and BASIC comprise a most versatile software package.

An EPROM programming card (useable with Levels 6, 7 and 8 monitors) is now available so, having created your very own language using "TRAP" you can 'burn' it in to become part of the resident software! Personal extensions to the Levels 6 and 7 (2K) monitors are also practicable using the unoccupied (Tiny BASIC) sockets on the main board. The constructor is at liberty to set the CPU clock speed by altering the value of the controlling crystal. The standard values are 7.168 MHz or 18 MHz for which alternative versions of software are available. The latter gives an actual clock speed of about 2 MHz.

Level 8 Software

Level 8 Pascal comprises a 4K monitor/editor resident on the main-board with a 20K compiler/interpreter located on the Motherboard. Although offering greater scope than BASIC it should be remembered that Pascal has not gained wide popularity amongst microcomputer users. This situation may well change but for the present the Pascal enthusiast does not enjoy the scope for exchange of software and ideas available to the BASIC programmer.

Level 9 Software/Hardware

The Level 9 disc system comprises disc drive(s) with power

supply, S100 controller card and a small interface card which is connected to the Motherboard. The CP/M operating system (on disc) replaces the onboard monitor, BASIC, assembler or other firmware. Purchasing the CP/M system (and becoming a registered user) gives access to vast amounts of free (yes, *free*) software available for the cost only of the discs on which supplied. The operating system requires a minimum of 16K RAM in which to work although many languages and programs will need more memory than this.

Documentation

Transam's documentation for the software packages is usually excellent although the 39 page Level 7 documentation is perhaps not quite so thorough in the step-by-step examples as its predecessors — but having progressed through the three previous BASICs, I found that a little experimentation soon resolved small misunderstandings.

In all cases the addresses of the monitor sub-routines are listed and these can be called from BASIC (except when in Level 4).

Considerations

For those constructors who may be about to launch into computing I would recommend serious consideration being given to Triton. The work is rewarding, and some initiative is called for to overcome the snags which are likely to arise, but the end product is a most practicable and versatile piece of equipment which is supported by easy-to-use software.

With a product of this nature it is reasonable that a prospective purchaser should ask what standard of service he might expect from a would-be supplier. My own experience suggests that Transam were overwhelmed by the initial demand for Triton. In the original kit some items were omitted in error and this situation subsequently arose twice when I called at their shop to collect RAM and EPROM card kits in mid-1979. Since then, Transam seem to have come to terms with the fact that good service is at least as important as the product and, more recently, a faulty EPROM card was replaced and returned to me within a week. When my Level 7 monitor suffered a brainstorm I was able to call at Transam's shop where the problem chip was quickly identified and a replacement programmed on the spot.

If you have a Triton you have the reassurance that problems can be discussed with those who sell and know the computer. This is an aspect which I, and no doubt others, regard as an important consideration.


Your Commodore PET System

The Commodore PET is Britain's best selling microcomputer and the most popular choice in every field:-

- * In Education for teaching Computer Science and as a teaching aid for other subjects.
- * In Science and Engineering for solving problems and for monitoring laboratory equipment.

- * In Business the PET system can be put to a wide range of functions including Payroll, Accounting, Statistical Analysis, Stock Control and Word Processing.

A SELF-CONTAINED MICRO-COMPUTER FROM £550.

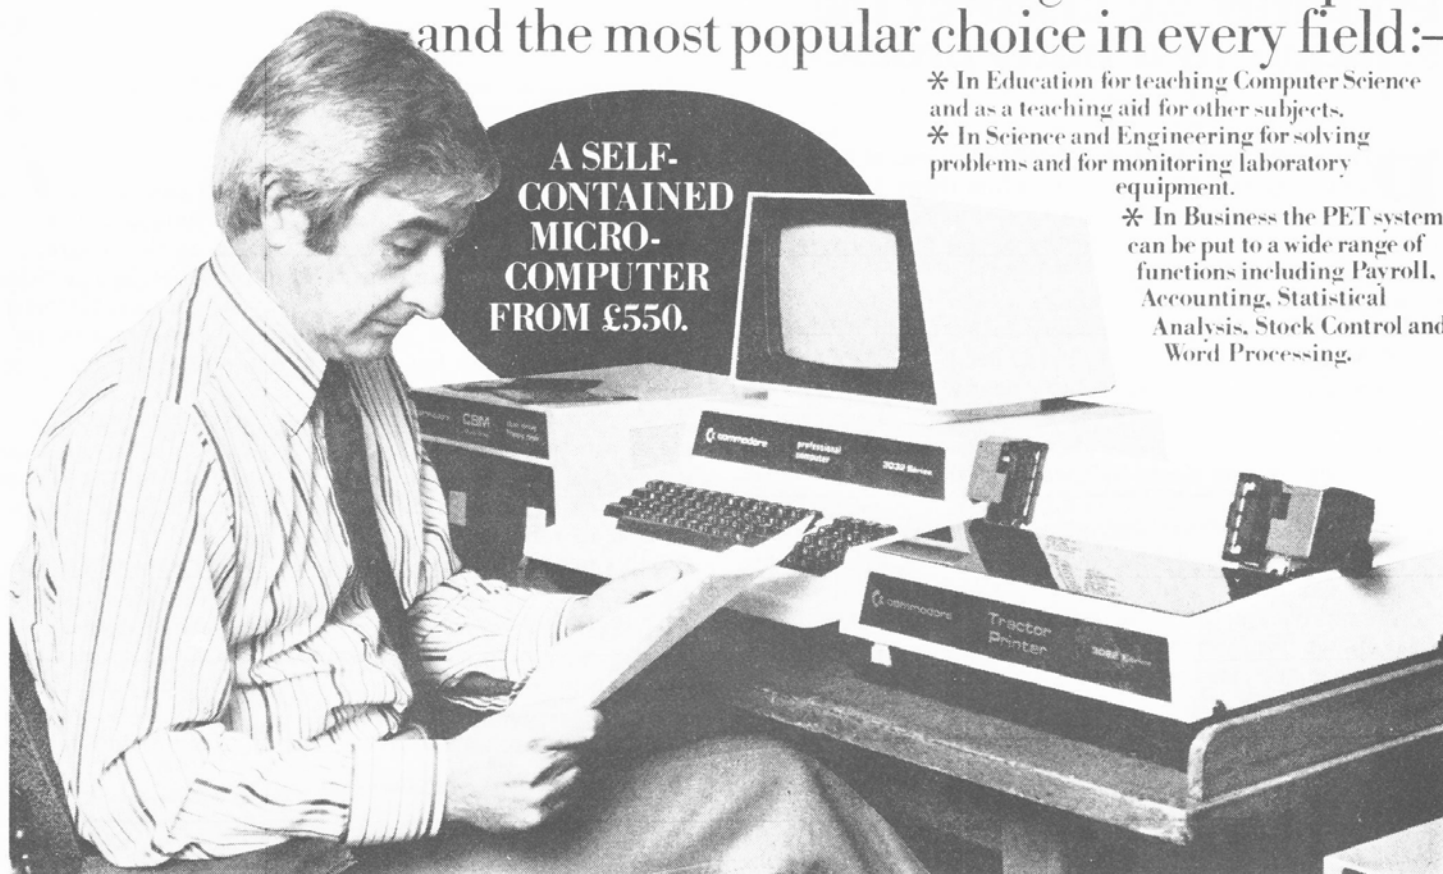

Not least of its attractions is the price of a PET - from £550 for a self contained unit, to under £2,500 for the complete system including Floppy Disk Unit and high-speed Printer. Ask your nearest Commodore dealer below for details about Commodore hardware, software and training courses.

Our Dealer* Network

LONDON

Capital Computer Systems, W1. 637 5551
ACE (by Top TV Ltd), SW1. 730 1795
Micro Computer Centre, SW14. 876 6609
Logic Box Ltd, SW1. 222 1122
Sumlock Bondain Ltd, EC1. 250 0505
Da Vinci Computers Ltd, NW4. 202 9630
L & J Computers, NW9. 204 7525
Adda Computers, W1. 408 1611
CSS Business Equipment Ltd, E8. 254 9293
Advanced Management, EC2. 638 9319
Metyclean Ltd, SW1. 828 2511
Microcomputation, Southgate. 882 5104
T.L.C. World Trading Ltd, WC2. 839 3894

HOME COUNTIES

Orchard Electronics Ltd, OXON. 0491 35529
D. L. Chittenden Ltd, CHESHAM. 4441
J. R. Ward Computers Ltd, MILTON KEYNES. 562850
Dataview Ltd, COLCHESTER. 78811
South East Computers Ltd, HASTINGS. 426844
Symtec Systems Ltd, SOUTHAMPTON. 38868
Alphascan Ltd, BANBURY. 75606
Super-vision, SOUTHAMPTON. 774023
Millhouse Designs Ltd, ALTON. (042) 050374
Micro Facilities Ltd, MIDDX. 979 4546
DDM, BRENTWOOD. 230480
Stuart R. Dean Ltd, SOUTHEND. 62707
Alpha Business Systems, HERTFORD. 57423
HSV Microcomputers, BASINGSTOKE. 62444
HSV Microcomputers, SOUTHAMPTON. 22131
RUF Computers (UK), BURGESS HILL. 45211
Wego Computers Ltd, CATERHAM. 49235

T. & V. Johnson, CAMBERLEY. 62506
T. & V. Johnson, OXFORD. 721461
Petalect Electronic Services Ltd, WOKING. 23637/21776
Business Electronics, SOUTHAMPTON. 738248
Amplicon Micro Systems Ltd, BRIGHTON. 562163
Bromwall Data Services Ltd, HATFIELD. 60980/64840
MMS Computer Systems, BEDFORD. 40601
Isher-Woods, LUTON. 416202
Sumlock Bondain, NORWICH. 26259
CSE (Computers), READING. 61492
Oxford Computer Systems, WOODSTOCK. 811976

MIDLANDS & STH. HUMBERSIDE

Taylor Wilson Systems Ltd, KNOWLE. 6192
Betos [Systems] Ltd, NOTTINGHAM. 48108
Holbrook Business Systems, DERBY. 368088
Lowe Electronics Limited, MATLOCK. 2817
Davidson-Richards Ltd, DERBY. 368803/4
Arden Data Processing, LEICESTER. 22255
Tekdata Ltd, STOKE-ON-TRENT. 813631
C.S.M. Computer Systems, BIRMINGHAM. 360 6264

Business & Leisure Microcomputers, KENILWORTH. 512127
Caddis Computer Systems Ltd, HINCKLEY. 613544
Allen Computers, GRIMSBY. 40568
CPS (Data Systems) Ltd, BIRMINGHAM. 707 3866
Camden Electronics, BIRMINGHAM. 773 8240
Cliffstock (Computer Systems) Ltd, WOLVERHAMPTON. 24221

YORKSHIRE & NTH. HUMBERSIDE

Microprocessor Services, HULL. 0482 23146
Microware Computers, HULL. 562107
Computer Workshop, LEEDS. 788466
Hallam Computer Systems Ltd, SHEFFIELD. 663125
Ackroyd Typewriters Ltd, BRADFORD. 31835
Datron Micro Centre, SHEFFIELD. 585490
Yorkshire Electronics Service Ltd, MORLEY. 522181
Sheffield Computer Centre, SHEFFIELD. 53519

NORTH EAST

Dyson Instruments, DURHAM. 66937
Currie & Maughan, GATESHEAD. 774540
Wards Office Supplies, GATESHEAD. 605915

Tripoint Associated Systems, SUNDERLAND. 73310
Newcastle Computer Systems, NEWCASTLE UPON TYNE. (0632) 615325

SOUTH WALES & WEST COUNTRY

Computer and Design, BROADSTONE. 0202 697341
A. C. Systems, EXETER. 71718
Computer Supplies (Swansea), SWANSEA. 290047
Sigma Systems Ltd, CARDIFF. 21515
Devon Computers, PAIGNTON. 526303
Bristol Computer Centre, BRISTOL. 23430
J. A. D. Integrated Services, PLYMOUTH. 62616
Sumlock Tabdown Ltd, BRISTOL. 26685
Radan Computational Ltd, BATH. 318483
T. & V. Johnson Ltd, BRISTOL. 422061

NORTH WEST & NORTH WALES

B. & B. Computers Ltd, BOLTON. 26644
Megapalm Ltd, CARNFORTH. 3801
Tharstern Ltd, BURNLEY. 38481
Fylde Business Machines Ltd, PRESTON. 731901
Preston Computer Centre, PRESTON. 57684
RPL Microsystems, DOUGLAS. 4247/8

LIVERPOOL

Microdigital, LIVERPOOL. 227 2535
Rockliff Brothers Ltd, LIVERPOOL. 5215830

MANCHESTER

Cytek (UK) Ltd, MANCHESTER. 832 7604
Executive Reprographic Ltd, MANCHESTER. 228 1637
Sumlock Manchester Ltd, DEANS GATE. (0618) 834 4233
Computer Workshop, MANCHESTER. 832 2269
Professional Computer Services Ltd, OLDHAM. 061-624 4065
D. Kipping Ltd, SALFORD. 834 6367
Catlands Computers Ltd, WILMSLOW. 527166

SCOTLAND

Microcentre, EDINBURGH. 225 2022
Thistle Computers, KIRK WALL. 3140
McAllister Business Equipment, EDINBURGH. 336 2402

IRELAND

Softech Ltd, DUBLIN. 784739
Medical and Scientific, LISBURN. 77533

*This is a list of dealers participating in associated advertising and not a full list.

Commodore
We made small computers big business.

Commodore Information Centre, 360 Euston Road, NW1 3BL. 01-388 5702

Primarily we discover the solution to a nutty problem.

P rime numbers can be divided into several categories according to how hard it is to find them. I suggest the following rough definitions:—

- Easy primes — those which may be found by mental arithmetic. (eg. 2, 3, 5, 7, 11, 13 etc.)
- Reasonable primes — those which fit into a single variable, but which are unlikely to be found by mental arithmetic. (eg. 8707, 9721, 15137 etc.)
- Hard primes — those which nearly fit into a single variable. (eg. 1653701519 etc.)
- Unreasonable primes — those which, because of their size, can only be found by special mathematical methods. (eg. $2^{21701} - 1$ has 6533 digits)

It is worth noting that we only require reasonable primes to solve our problem, for although the number 385,640,866,350,419 will not fit into a single precision variable the prime factors do. We are, therefore, left with two problems. Firstly, how do we find reasonable prime numbers and secondly, how do we test to find whether or not they are factors of our number.

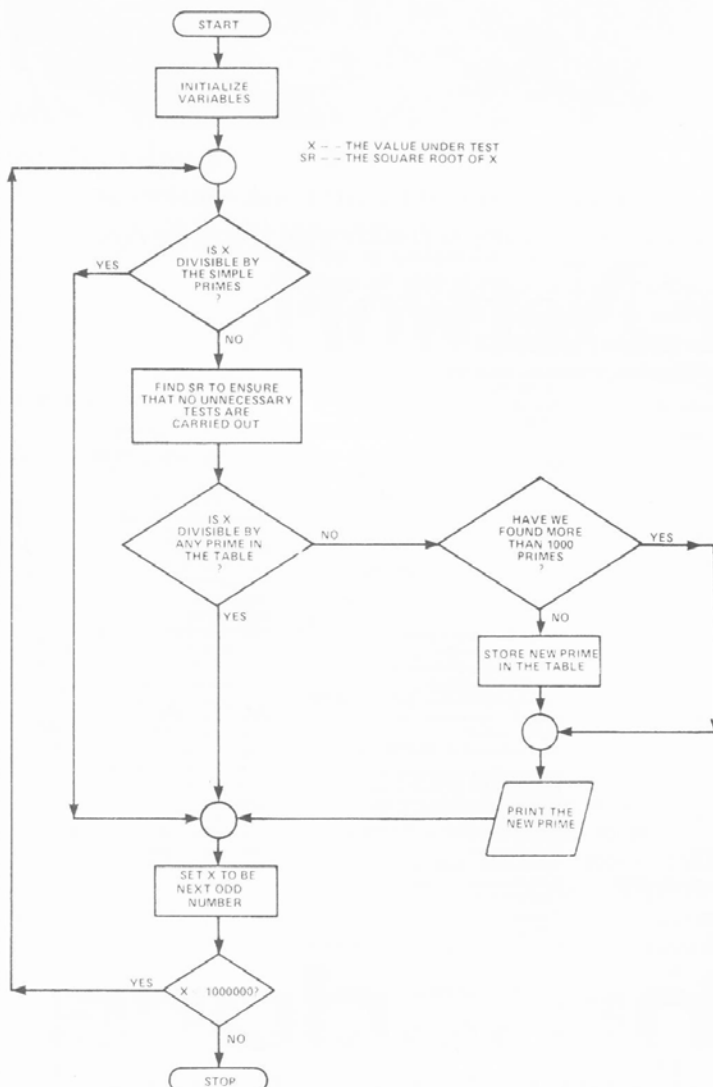


Fig.1. Flowchart to find all prime numbers less than 1,000,000.

Finding Reasonable Primes

To prove that a number is prime we must ensure that it has no factors other than itself and one. Fortunately, it is only necessary to test the primes not exceeding the square root of the number. We know, for example, that 113 is prime because none of the set (2, 3, 5, 7) are factors. Unfortunately, the primes from 2 to 113 can only find primes up to 16127 and you can bet your chips that the factors of my number are bigger than that!

What we can do is to use easy primes to discover more primes, which we store in an array. The primes discovered in this way can then be used to find even larger primes. eg. if we store 1000 primes then these can be used to test all numbers up to about 50,000,000. The flowchart for this method is shown in figure 1 and gives the algorithm for the BASIC program (figure 2) from line 250 to line 500 with the exception of the subroutine calls.

```

100 REM *****
110 REM *
120 REM * PROGRAM --- PRIME HUNTING *
130 REM *
140 REM * PROGRAMMED IN PET BASIC *
150 REM *
160 REM * TREVOR L LUSTY 23/01/80 *
170 REM *
180 REM *****
190 A1 = 3856408
200 A2 = 66
210 A3 = 35
220 A4 = 04
230 A5 = 19
240 DIM P(1000)
250 LET A=2 B=3 C=5 D=7 E=11 F=13 T=.00001
260 LET X = A : GOSUB 510 : PRINT A
270 LET X = B : GOSUB 510 : PRINT B
280 LET X = C : GOSUB 510 : PRINT C
290 LET X = D : GOSUB 510 : PRINT D
300 LET X = E : GOSUB 510 : PRINT E
310 LET X = F : GOSUB 510 : PRINT F
320 LET P(1) = 13 : X = 15 : N = 1
330 IF X = B*INT(X/B+T) THEN 400
340 IF X = C*INT(X/C+T) THEN 400
350 IF X = D*INT(X/D+T) THEN 400
360 IF X = E*INT(X/E+T) THEN 400
370 LET SR = SQR(X)
380 FOR J = 1 TO N
390 LET W = P(J)
400 IF W > SR THEN 430
410 IF X = W*INT(X/W+T) THEN 400
420 NEXT J
430 LET N = N+1
440 IF N > 1000 THEN 460
450 LET P(N) = X
460 PRINT X
470 GOSUB 510
480 LET X = X+A
490 IF X < 1000000 THEN 330
500 END
510 LET S = A1-X*INT(X/A1/X)
520 LET B2 = 100*S+A2
530 LET S = B2-X*INT(B2/X)
540 LET B2 = 100*S+A3
550 LET S = B2-X*INT(B2/X)
560 LET B2 = 100*S+A4
570 LET S = B2-X*INT(B2/X)
580 LET B2 = 100*S+A5
590 LET S = B2-X*INT(B2/X)
600 IF S < 0 THEN RETURN
610 PRINT
620 PRINT "ONE FACTOR OF THE NUMBER"
630 PRINT " IS "X
640 END
  
```

Fig.2. This program will find prime factors of large numbers.

PROBLEM PAGE

As this part of the program will have to be executed many times, it must be carefully examined to ensure that it is efficient. It is for this reason that commonly used numbers are stored in simple variables. Subscripted variables require much more execution time and an initial sieving by 2, 3, 5, 7 and 11 means that only about 10% of the numbers tested need use them. Please don't write to tell me how this routine can be further improved. I can think of several ways myself, but they make the method harder to understand and if we really want an efficient program we should use a language other than BASIC.

The rest of the program is just long division and uses techniques which have been described in previous Problem Pages. The factors of the number given are 72661, 72727 and 72977. If you are interested in finding large primes I suggest you read *The Art of Computer Programming* — Volume 2: *Seminumerical Algorithms* by Donald E. Knuth. It is also interesting to note that the largest known prime was found by a schoolboy!

Lots Of Coconuts

There seem to be two reasons for tackling the problems set on this page. One is for fun and the other is to learn new techniques or limitations which help to improve our general programming ability. There were so many letters and queries following my Square Triangles problem that I thought a similar problem was called for — hence Coconuts.

```

1000 REM *****
1020 REM * LOTS OF COCONUTS *
1040 REM *
1060 REM * PROBLEM PAGE *
1080 REM * SOLUTION NO.7 *
1100 REM *****
1120 LET P = 1 REM *** SET FIRST COCONUT ON AREK ***
1140 LET T = 3 REM *** FIRST LAYER BELOW AREK ***
1160 LET N = 2 REM *** DIFFERENCE BETWEEN LAYERS ***
1180 LET P = P+T REM *** ADD ON NEXT LAYER ***
1200 LET S = SQR(P) REM *** FIND SQUARE ROOT OF TOTAL ***
1220 LET S = INT(S+.005) REM *** FIND INTEGER PART OF ROOT ***
1240 IF S*S <> P THEN 1320 REM *** COMPARE SQUARE TO TOTAL ***
1260 PRINT:PRINT:PRINT
1280 PRINT "THE PYRAMID HAS";N;" LAYERS WITH";T;" COCONUTS"
1300 PRINT "IN THE LOWEST LAYER. THE TOTAL NUMBER OF NUTS IS";P
1320 LET N = N+1 REM *** SET NEW ROW TOTAL ***
1340 LET T = T+N REM *** FORM NEXT LAYER TOTAL ***
1360 IF T < 1000001 THEN 1180 REM *** HOW MANY NUTS PER LAYER ***
1380 END
READY.

```

THE PYRAMID HAS 2 LAYERS WITH 3 COCONUTS
IN THE LOWEST LAYER. THE TOTAL NUMBER OF NUTS IS 4

THE PYRAMID HAS 48 LAYERS WITH 1176 COCONUTS
IN THE LOWEST LAYER. THE TOTAL NUMBER OF NUTS IS 19600

Fig.3. How the square root function is used.

My reason for setting the original problem was to highlight difficulties which are often encountered with the square root function. The same difficulties can occur with this problem if you choose to solve it by my first method (figure 3). This is the method which I feel is the easiest to understand and it is worth noting that an elegant program which saves two minutes computing time but takes two hours longer to write is only an improvement if it is to be run many times. If your program has to be used by others, the maxim 'Keep it Simple' has a lot to recommend it.

Just as triangle numbers were formed by adding the integers, so pyramid numbers can be found by adding the triangle numbers. The base of our pyramid is a triangle and the next pyramid is formed by adding the next triangular base. The following table reveals all:-

INTEGERS	TRIANGLE NO.	PYRAMID NO.
1	1	1
2	2 + 1 = 3	3 + 1 = 4
3	3 + 3 = 6	6 + 4 = 10
4	4 + 6 = 10	10 + 10 = 20
5	5 + 10 = 15	15 + 20 = 35
6	6 + 15 = 21	21 + 35 = 56

Store N holds the integers, store T the triangle numbers and store P the pyramid numbers. I feel that there are sufficient remark statements in the program for you to work the rest out for yourselves.

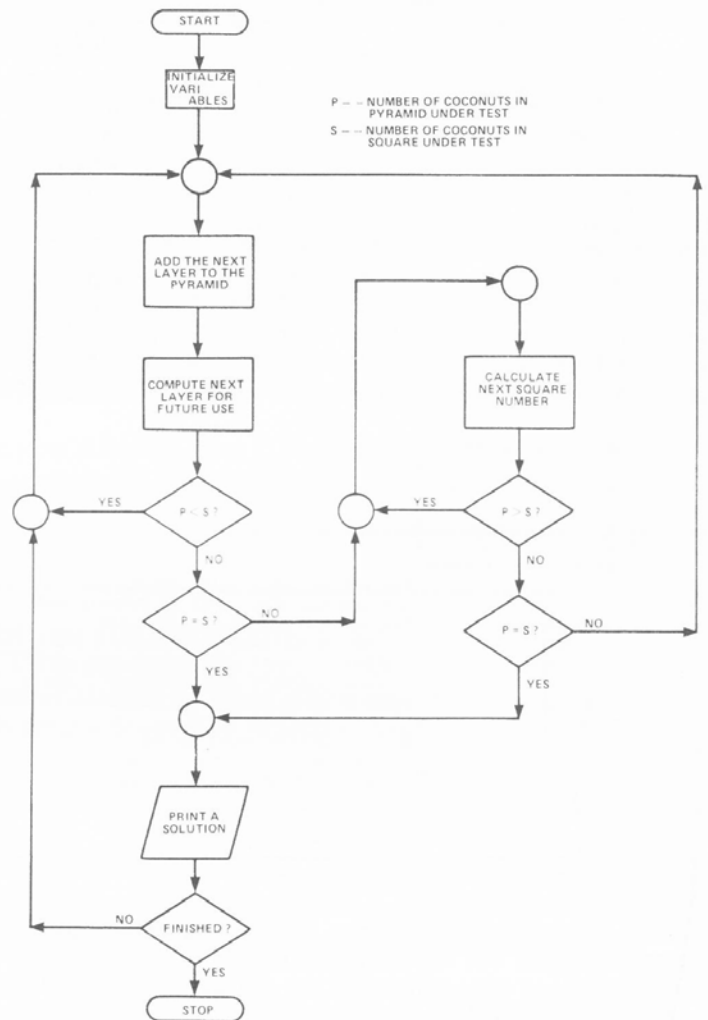


Fig.4. Note the symmetry.

Method 2

Now what set the cat amongst the pigeons with the original problem was that some people don't have square root functions. Many searched for, and found, an alternative solution. After all, if we can find one set of values by adding a sequence of numbers together, why not try the same method with the squares. The easiest way I have found to visualise this method is to think of a child building two towers of wooden bricks. One tower is always a square number of bricks high and the other height represents the pyramid number. If we can find a situation where the heights of the two towers are equal then we have solved our problem.


```

1000 REM *****
1020 REM * LOTS OF COCONUTS *
1030 REM * SECOND SOLUTION. *
1040 REM *
1060 REM * PROBLEM PAGE *
1080 REM * SOLUTION NO.7 *
1100 REM *****
1200 LET P=1:T=3:N=2:S=1:M=3 REM *** SET UP INITIAL VALUES ***
1220 LET P=P+T:N=N+1:T=T+N REM *** ADD NEXT LAYER TO PYRAMID ***
1240 IF P<S THEN 1220 REM *** NUMBER < CURRENT SQUARE ? ***
1250 IF P=S THEN 1320 REM *** HAVE WE FOUND A SOLUTION ***
1260 LET S=S+M:M=M+2 REM *** CALCULATE NEXT SQUARE ***
1280 IF P>S THEN 1260 REM *** PYRAMID > SQUARE ? ***
1300 IF P<>S THEN 1360 REM *** HAVE WE FOUND A SOLUTION ***
1310 PRINT:PRINT:PRINT
1320 PRINT "THERE ARE",N-1,"LAYERS AND",T-N,"NUTS IN THE"
1340 PRINT "LOWEST LAYER. THE TOTAL NUMBER OF NUTS IS",P
1360 IF T<1000000 THEN 1220 REM *** HAVE WE FINISHED ? ***
1380 END

```

Fig.5. Solution program compares totals.

The flowchart (figure 4) and program (figure 5) show the details of this method. The pyramid numbers are found by the method above and the square numbers in store S by adding the odd integers. In fact, as we are not interested in the total heights of the towers, but only the difference between them. The size of the numbers may be reduced by using method 3 (figure 6). This method is most useful when using limited precision Integer BASIC.

With the square triangles problem it was possible to find a recurrence relation and this proved much faster than any of those above. Such relationships do not always exist, and I have been unable to find a suitable one for this problem. It is just possible that no more solutions even exist.

```

1000 REM *****
1020 REM * LOTS OF COCONUTS *
1040 REM * THIRD SOLUTION *
1060 REM *
1080 REM * PROBLEM PAGE *
1100 REM * SOLUTION NO.7 *
1120 REM *****
1140 LET P=1:T=3:N=2:S=0:M=1 REM *** SET UP INITIAL VALUES ***
1160 LET P=P+T:N=N+1:T=T+N REM *** ADD NEXT LAYER OF PYRAMID ***
1180 IF P<S THEN 1160 REM *** ADD ANOTHER LAYER ? ***
1200 IF P=S THEN 1280 REM *** DO WE HAVE A SOLUTION ? ***
1220 LET P=P-M:M=M+2:S=S+1 REM *** SUBTRACT LAYER OF SQUARE ***
1240 IF P>S THEN 1220 REM *** SUBTRACT ANOTHER LAYER ? ***
1260 IF P<>S THEN 1340 REM *** DO WE HAVE A SOLUTION ? ***
1280 PRINT:PRINT:PRINT
1300 PRINT "THERE ARE",N-1,"LAYERS AND",T-N,"NUTS IN THE"
1320 PRINT "LOWEST LAYER. THE TOTAL NUMBER OF NUTS IS",S+S
1340 IF T<1000000 THEN 1160 REM *** HAVE WE FINISHED ? ***
1360 END

```

Fig.6. Vive la difference! Another version.

What The Programmer Said

Variety is the spice of life, or so they say, and there should be something in the following problems for everyone. The first requires no programming at all, the second just one line and the third is for those of you who can't do the first two!

A sociologist, a physicist and a computer programmer were travelling in a train when they saw three sheep standing still in a field. 'I didn't know they had any black sheep in this area' said the sociologist. 'In this area there is at least one black sheep.' said the physicist. Now, you don't have to program for very long before you realise that you must not take anything for granted — so what did the computer programmer say?

Biggest Of Three

There are no IF's THEN's or ELSE's in this two line programming problem, and no multiple statement lines either. The first line inputs three numbers in any order ie. 10 INPUT A,B,C and the second prints the largest of the three numbers only. What function follows the PRINT statement in the second line?

Base Changing

Those of you that have done any machine code programming will know how useful it is to have a conversion table from decimal to hex. If you have not already done so write a program to produce such a table. If you don't have a hard copy facility then write a program which inputs a base 10 integer and converts it to bases 2 to 16.

Post Script

This is a special for PET owners. I have seen a certain amount of discussion recently about how to get one's revenge on MICROCHESS 2.0 by Peter Jennings. The quickest win I have seen published at level 8 is 22 moves, and this did not work with my version. Not to be outdone I offer the solution below. Mate takes only fifteen moves at level 8 and can be entered with a playing time for white of under a minute.

WHITE

D2—D4
G1—F3
D1—D3
D3—B5
F3—E5
B5—A4
E5—C6
A4—C6
C6—A6
C1—F4
A6—A7
A1—B1
F4—C7
A7—A8
A8—C8

Queen's pawn gambit
Knight protects pawn
Queen advances
Queen pins knight
Knight advances
Queen retreats
Knight takes knight
Queen takes pawn
Queen takes pawn
Bishop threatens pawn
Queen advances
Rook takes rook
Bishop takes pawn
Check
Mate

BLACK (PET)

D7—D5
C8—G4
B8—C6
A8—B8
A7—A6
G4—F5
B7—C6
D8—D7
F5—C2
B8—B2
B2—B1
C2—B1
B1—A2
D7—C8

The problem is to try to find a quicker mate at level 8.



"FULLY TRANSISTORISED EMERGENCY RADIO, AND YOU CONNECT THE BATTERY THE WRONG WAY AROUND...."

ETI JUNE 1980

WHAT TO LOOK FORWARD TO IN OUR NEXT ISSUE ON SALE MAY 2ND.

DESIGNERS HANDBOOK

Now this is the one that even we've been waiting for. Many is the rainy Sunday that has passed with the enthusiast huddled intent over his workbench. Many too are the times he has howled loud into the storm when a project fails to operate for the want of one small piece of circuitry to link this with that or that with this, that or the other.

Information to allow him to design his own circuits quickly and simply is sadly lacking. Books take everything too seriously and at too much length. Looking anything up takes hours — by which time the rain has stopped and

Next month we present our Analogue Designers Handbook from the man of many nodes, Tim Orr. He presents the quick and easy way to amplifiers, filters, oscillators etc. etc. — and they'll be all your own work! Can you afford to miss it?

DRUM SYNTHESISER PROJECT

No, I don't believe you've never heard one of these. Just about every single produced in the last millenium has those noises all over it. You know, those noises — the ones that sound like a cat being stepped on backwards at great speed.

If you really don't know what we're going on about you'd better read ETI next month hadn't you?

HOUSE WIRING

So you think you know how it's done eh? Just wait until you pull the bathroom cord one day and the toast pops up: switch on the hall light only to have the TV burst into life Before long the house is a mass of ripped out wiring and is echoing to the sound of slamming front doors as enraged spouses storm into the sunset. Don't do it until you've read our superb article from Ray Marston next month!

FM LINE DISTRIBUTION

Have hi-fi in any room in the house without extra wires. Superb sound that follows you around. Uses the mains to (safely) distribute an audio signal anywhere the wires are connected to. The answer a million prayers!

TAPE RECORDER RESPONSE OPTIMISATION SYSTEM

It's one hell of a title for an extremely straightforward little device that will allow you to optimise bias conditions on any tape recorder. Works with a minimum of fuss and doesn't cost more than the Empire State Building to construct.

ANTI-MATTER


Better forget the Star Trek reaction pods. Throw away the tickets to another Universe. Instead read our explanation of the real truth (?) behind around and for anti-matter.

Articles mentioned herein are in an advanced state of preparation, however, circumstances may dictate changes to the final contents.
--

DOUBLE SEIKO OFFER



**FIRST
TIME
UNDER
£50**

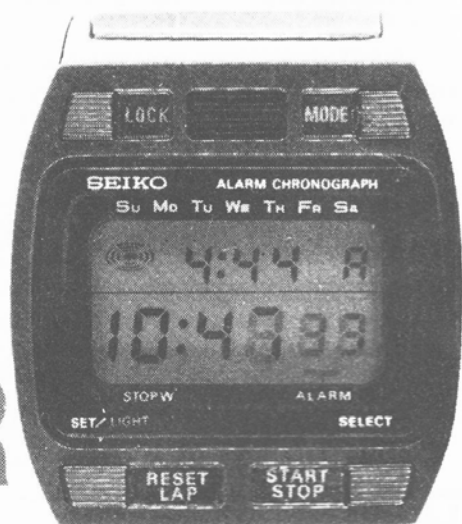

**£39.95
ALL INC**

Two Super Seikos -- offered for
the first time in living memory
for under £50. How do we do it?
You can say that again. How do
we do it?

**£49.95
ALL INC**

Let's look at the simple Seiko first -- a dependable chronograph with no nonsense operation. At the touch of a button you can select either the things that normal watches do i.e. telling the time or a stopwatch display with the usual split/lap time facility.

The next Seiko is a bit clever. It's an alarm chronograph with a locking facility. What does that mean, I hear you say. Buttons are prone to being pushed, especially buttons that reset the watch time. However, with this remarkable wrist piece you can just press the LOCK button and pushing all the other controls suddenly has no effect. Full chronograph and alarm facilities we also featured.

SEIKO DOUBLE WATCH OFFER

Name

Address

.....

.....

Please send me Seiko Chronograph(s) at £39.95 each.
..... Seiko Alarm Chronograph(s) at £49.95 each

I enclose a cheque/PO made payable
to Modmags Ltd for £

Modmags Ltd.,
Sales Office (Ref. Seiko Offer),
145, Charing Cross Road,
London WC2H 0EE.

SPECIAL OFFER


ELECTROSTATIC PRINTER

Ask most people what they would like as their first peripheral and the chances are they will say "Printer". Well, thanks to CT, we are being generous this month, here is an attractive electrostatic printer from the famous firm of Centronics. Capable of printing in three sizes of typeface it is easily attached to your machine by way of the parallel interface. The logic is fully TTL compatible and STROBE, Acknowledge and Busy lines are provided to make life easy.

For those of you who don't feel up to the task we will be publishing interface details in next month's issue for several different machines.

Cost of this wonderful peripheral is a mere £224.25 including VAT and carriage and stocks are good. Paper is also available at £2.50 a roll for those who wish to list the "Encyclopedia Universa". The printer comes complete with documentation, connector and cleaning paper as well as a roll of the printing paper.

Don't miss out, be the first on your street with your own printer and then you can send us that latest program all neatly typed out!

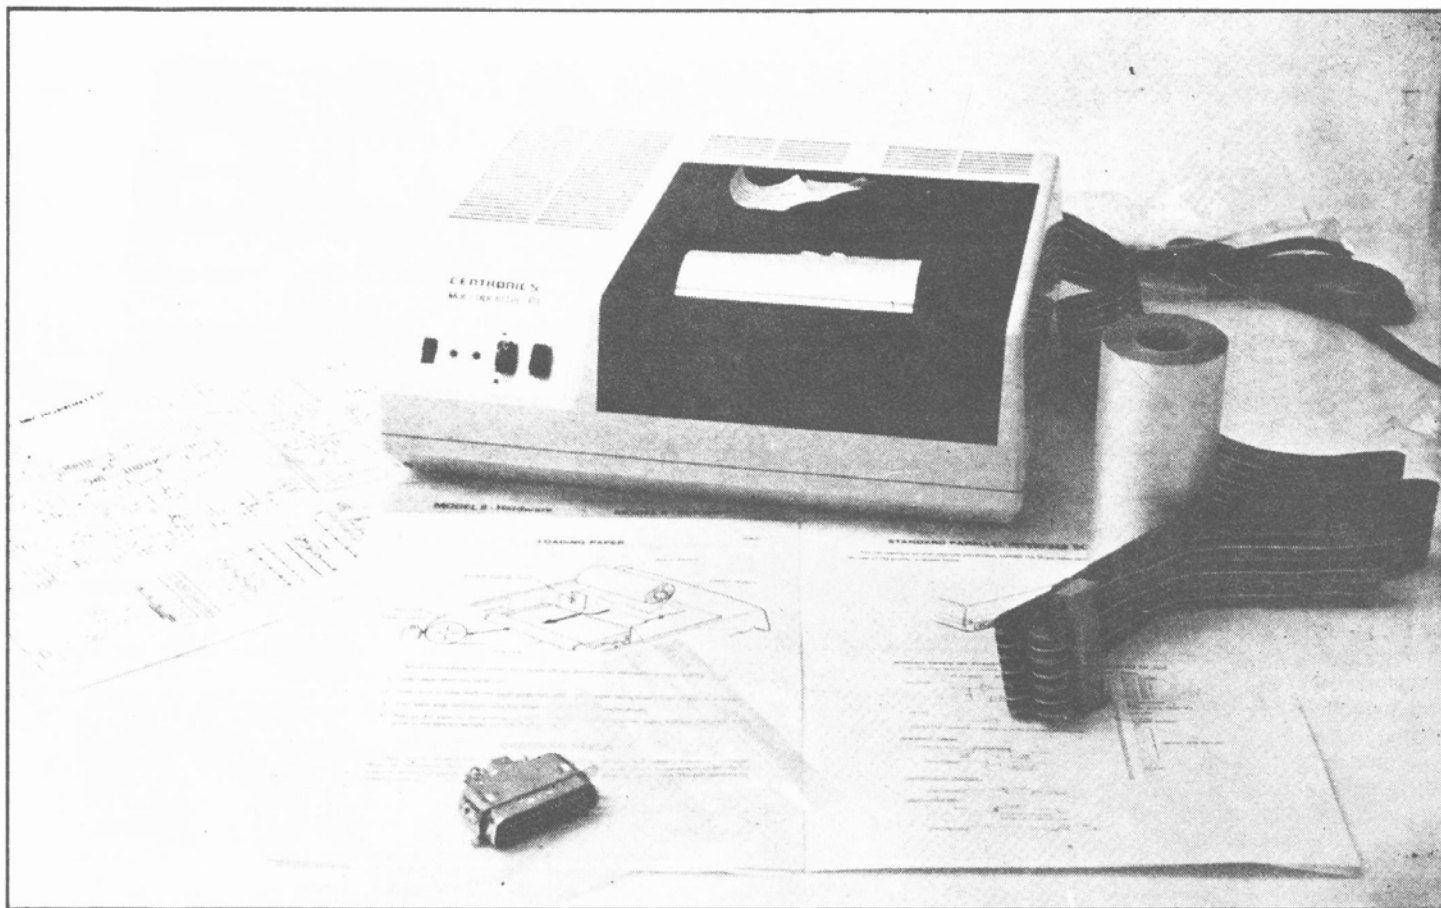

£224.25 all inc.

To PRINTER OFFER, CT, 145 Charing Cross Road, London, WC2H 0EE.

I enclose cheque/PO, payable to Computing Today, for £..... for printers.

Name

Address

.....

.....

Please allow 14 days for delivery.

The first step towards 208K bytes of internal addressable memory... **nascom-2**

The Nascom-2 is the heart of our new System 80 desk top microcomputer system. It fits into the bottom of an internal frame racking that is designed to hold a further four 8in x 8in expansion boards.


With our new 48K RAM board this means you can have up to 192K bytes of internal memory. Add to this the 16K of user memory available on the CPU board and you have a potential 208K bytes – all addressable by the Nascom-2 using page mode software.

To give maximum user flexibility Nascom-2 is now being supplied without user RAM. The eight, free, 24-pin sockets have link option to allow the use of either RAM, ROM or EPROM. With EPROM the choice is wide: 2708, 2716, 2508, 2516, TMS2516, 2758, 2532 and 2732. Using 2716s alone provides over 16K.

In ROM there is a 2K NAS SYS operating monitor and 8K Microsoft BASIC. NAS SYS is a powerful monitor with full cursor control allowing you to edit any part of the screen without having to re-enter whole lines.

A character generator ROM is provided to enable Nascom-2 to have 128 graphics characters which can be displayed in three different modes. This is in addition to the 128 character full upper and lower case alphanumeric character generator ROM.

The 57-key solid state keyboard supplied with Nascom-2 will also fit into the System 80 housing as will the Nascom 3 amp power supply required to run the Nascom-2. (A 5 amp supply will be needed to run the CPU board plus four expansion boards.) So you can see the Nascom-2 is totally compatible with System 80. Buying a Nascom-2 gives you a head start to a very

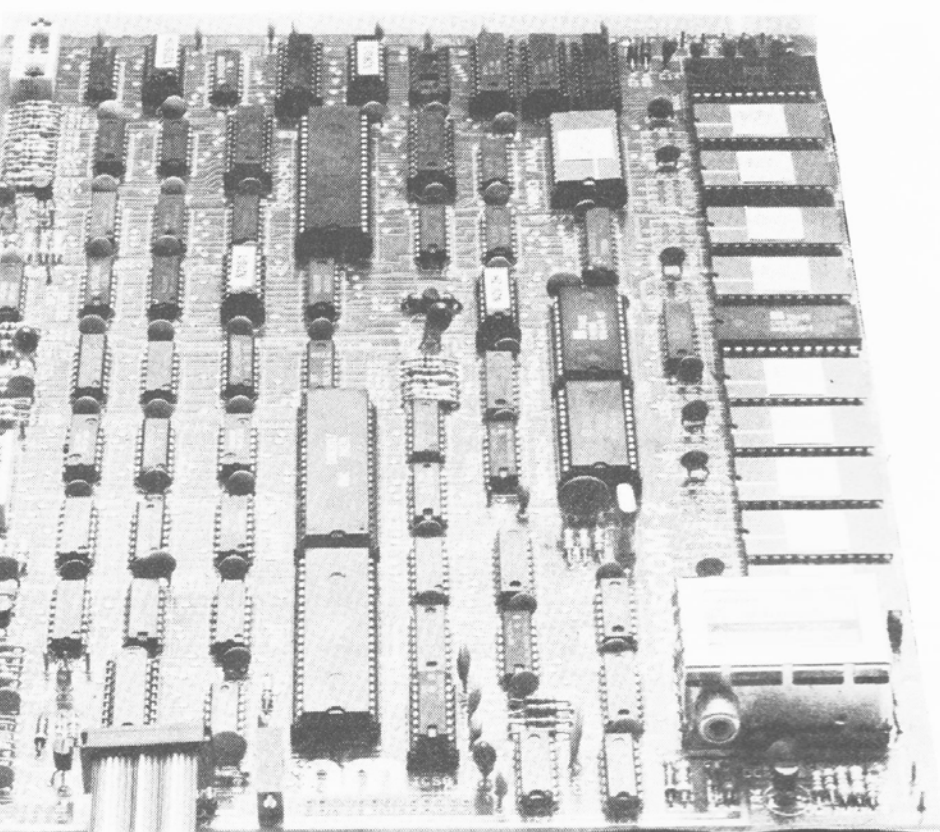

£225
PLUS VAT KIT PRICE

powerful infinitely flexible and expandable system designed by one of the leading microcomputer design teams in Europe and offering unrivalled value for money. Now isn't that worth all the waiting?

Nascom-2 specification in brief

CPU: Z80A **Clock rate:** Switch selectable 2/4 MHz
Memory: 10K bytes of ROM: 2K for NAS SYS-1, 8K Microsoft BASIC.


Keyboard: 57-key solid state full alphanumeric QWERTY layout Licon main frame quality keyboard with cursor control keys.

On board interfaces: Domestic TV at 50Hz 625 lines (adaptable to 60Hz/525 lines) displaying 16 lines of 48 characters.

Kansas City type audio cassette (300/1200 baud) or Teletype. RS232 for printer. 16 free, programmable P 10 lines.

Graphics: 2K bytes of ROM: 128 graphics characters, 128 character ASCII with full upper and lower case Alphanumerics.

System 80 – Total Option Concept

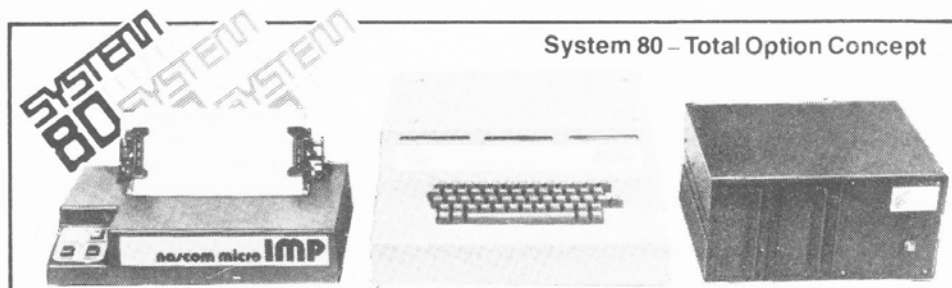


For further details and stockists please contact:
Nascom Microcomputers Limited,
92 Broad Street, Chesham, Bucks.
Telephone: (02405) 75155

nm

Nascom Microcomputers

vero

S100-the British way

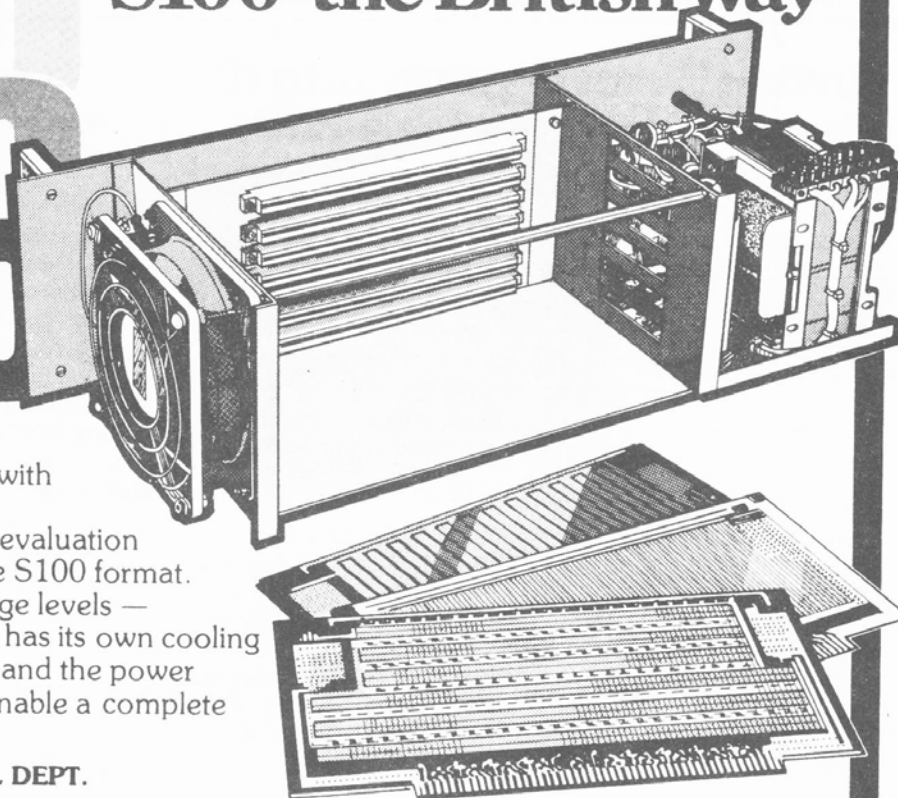

The Vero S100 Sub Rack is a 19" rack mountable development kit, complete with its own power supply and backplane motherboard, for the construction and evaluation of microprocessor based systems to the S100 format. The power supply provides three voltage levels — +8V, +18V and -18V. The Sub Rack has its own cooling fan providing airflow across the boards and the power supply. A full range of allied items to enable a complete system to be constructed are available.



VERO ELECTRONICS LTD RETAIL DEPT.
Industrial Estate, Chandler's Ford,
Hampshire SO5 3ZR
Tel: (04215) 62829

£39.50*

Professional ASCII Keyboards

MODEL KB 756

FULLY ASSEMBLED & TESTED
CASE AVAILABLE

Accessories Available include:—

Edge Connector	KB15P	£1.95*
Numeric Key Pad	KB710	£7.50*
Plastic Case (Black)	KB701	£12.75*
DC to DC Converter	DC512	£5.00*

* U.K. Orders add 15% VAT on Order total.

FULL DATA SHEET ON REQUEST

Citadel Products Limited.

Dept. CT. 50 High Street, Edgware,
Middlesex HA8 7EP. Telephone 01-951 1848

CARTER
KEYBOARDS

BITS & PCs

COMPUTER PRODUCTS

Nascom specialists
Add-ons
System 80


Complete technical aid
Order with confidence
Mail order

CONTROL AND HEX. KEY PADS FOR NASCOM 1 or 2
DUAL MONITOR BOARD
PORT PROBE
NAS-CHESS with graphic options NASCOM 1 or 2
NASCOM 1 GRAPHICS SYSTEM
LARGE S.A.E. FOR DETAILS PLEASE
DEMONSTRATIONS BY APPOINTMENT



18 Rye Garth, Wetherby,
West Yorkshire LS22 4UL

0937 63744



Further investigation into the dim world of machine code reveals some basic concepts.

Last month we investigated the structure and inter-connection of CPU devices and the building blocks that go with them to make a system. This month we shall build on that information and consider in detail the form of machine code instructions, what they do and how they are used, but first a few paragraphs explaining the hexadecimal notation that is used for the representation of numbers.

Hexadecimal Notation

It was seen last month that all information to and from a CPU and its external memory was transferred via the 8 or 16-way data bus, and also that memory addresses were produced on the 16-way address bus in binary. Now this binary code is the method used by computers to register numbers using only the two states that it has at its disposal: *ON* or *OFF*. With a number system based on '2' (hence the name binary) this representation will take the form shown below :-

base 2	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
decimal	128	64	32	16	8	4	2	1

By indicating which values when added together make the required number the binary representation is formed, hence 100 decimal is :-

base 2	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
decimal	128	64	32	16	8	4	2	1
(100) ₁₀	0	1	1	0	0	1	0	0

because $64 + 32 + 4 = 100$.

Now, were it necessary to talk to a computer in binary the task would soon become very arduous. To remember a binary string of 8 or 16 characters in length is difficult and to enter such a string would be unreliable and time consuming. So a sort of shorthand is used called **HEXADECIMAL** notation.

By taking 4 binary 'bits' the largest number that can be formed is 15, ie $8 + 4 + 2 + 1$. Now by assigning 16 characters to represent 0 - 15 as follows :-

decimal	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
hexa-																

each 4 binary 'bits' can be represented by a single character. Hence decimal 100 in binary is 0 1 1 0 / 0 1 0 0 and in Hexadecimal is 64

Another example the binary address 1 1 1 0 / 1 0 0 1 / 0 0 1 0 / 1 1 1 1 in Hex simplifies to E92F or decimal 59,695

It is essential that this notation is understood before reading on so if you are not quite sure go through it again.

Register Load And Move Instruction

Just as the internal program of the CPU carries out instructions by moving data from one register to another so do user programs. For that purpose a comprehensive set of Load and Move instructions are provided. The main types are shown below :-

Load	Put a given value in a specified register eg LD A, 30 H, MVI A, 30 H
Move (8 bits)	Put the contents of one register into another register eg LD D, B or MOV

D, B. In this case it is the contents of B that are moved to D

Move (16 bits) As for Move (8 bits) except it moves the 16 bits of a register pair eg LD SP, HL or SPHL

Another very important type of instruction in this category is called **INDEXED ADDRESSING** and as its concepts seem to give beginners sleepless nights I have chosen to deal with this whole topic in a later paragraph.

The final group of these instructions are known, in Intel jargon, as **PUSH** and **POP**. Here the content of a defined register pair is moved onto the top of the stack by the **PUSH** instruction and can be returned to a defined pair of registers with a **POP** instruction.

An example of stack operation would simplify this explanation.

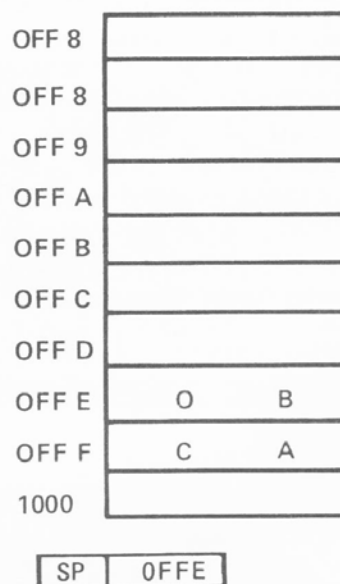


Fig.1. The stack area with the contents of the HL register pair **PUSHed** in.

Looking at the stack the contents of the H register now appear in location OFFF and the L register in location OFFE. The Stack Pointer now indicates the bottom of the stack at address OFFE. If we now operate on a new instruction, **PUSH BC** where BC contains 'DCA0', we can further examine the stack to see what has happened.

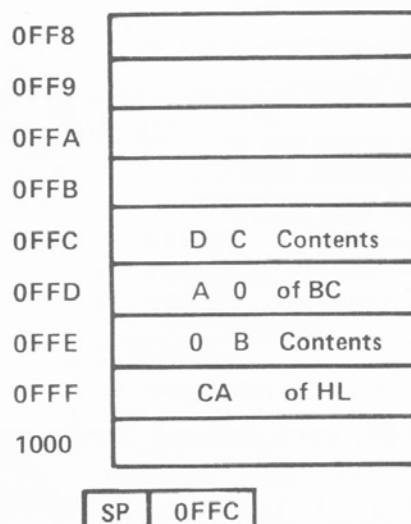


Fig.2. The same stack area after a second register pair has been **PUSHed**. Note that the contents have all been moved.

MACHINE CODE

First the Stack Pointer is pushed down the stack two places and the contents of register BC transferred to it. As a result the stack grows downwards, so it is important to reserve enough memory locations for it when writing a program.

The POP instructions will recover the contents from the stack, *but only in the reverse order that they were entered*. If we now wish to recover the contents of the BC register a simple POP BC instruction will revert us to the position shown in Fig.1. But to recover the HL register pair from Fig.2 is not so straightforward. A simple POP HL will put the contents of BC into register HL. A further POP HL will put the HL contents where they belong, but the 'BC contents' will have been lost. It is, therefore, of the utmost importance that the order of PUSH and POP instructions are carefully studied when writing programs. The stack is a very powerful tool when used wisely but it can create some awful problems if allowed to get out of control.

Further consideration will be given to the stack when discussing subroutines.

Arithmetic And Logic Instructions

This is one of the areas where CPU devices differ, offering better facilities on each new design. Up until the advent of the 6809 and 8086 the arithmetic department was limited to 'add' and 'subtract' operations, but these new devices include limited multiplication and/or division instructions.

All arithmetic and logic processes involve the use of the 'decision' area of a CPU and will set and reset 'bits' in the flag register (F) as shown below:—

Result Zero	} Zero flag set
Result goes through Zero to 'FF' and beyond	
Result goes from 'FF' through Zero to '01' and beyond	
	} Set carry flag

The more common logic functions are the AND, OR, the EXCLUSIVE OR (XOR), and are strictly speaking 'bit' operations in that they compare each 'bit' in the register and react accordingly.

AND	A	B	Result
	0	0	0
	0	1	0
	1	0	0
	1	1	1

Fig.3. The AND function truth table.

A typical use for the AND logic function is to strip an ASCII code of its ASCII prefix. Take, for example, the ASCII code for a '8' i.e. '38'. If we do a logic AND on '38' with '0F' Hex the result will be '8'.

ASCII	38	0 0 1 1 1 0 0 0
Hex	0F	0 0 0 0 1 1 1 1
		0 0 0 0 1 0 0 0

So taking each column in turn a '1' output will only result when both the ASCII bit and the Hex bit are '1'. By setting the four MSBs of the Hex code to '0000' the result can never be '1'. By setting the 4 LSBs to '1111' the result will mirror the four LSBs of the ASCII code. The result is the value of the ASCII code with its ASCII prefix (30) stripped.

OR

A	B	Result
0	0	0
0	1	1
1	0	1
1	1	1

Fig.4. The OR function truth table.

The OR function can be used for setting a number of bits in a register to a predetermined state. For instance if REG E were to be used as a flag register and was preset to '2A' Hex, bits 6, 4 and D can be set by Register E being OR functioned with '51' Hex.

	B2 ←	B0
Reg E (2A Hex)	00101010	
OR 51 Hex	01010001	
	01111011	

Taking each column in turn here, the result will be set to '1' if either bit is set to '1'. So the required bits 6, 4 and 2 have been set to '1' without altering the status of bits 7, 5, 4, 3 or 1.

The exclusive OR function is useful and is frequently used to set the Accumulator to Zero without altering the condition flags. The truth table of the XOR is shown below:—

XOR

A	B	Result
0	0	0
0	1	1
1	0	1
1	1	0

Fig.5. The exclusive OR (XOR) truth table.

To put this function in words, the result is set to '0' only if all bits in that order are the same.

So taking an example, if Reg A (Acc) = 'C4' Hex an exclusive XOR A with A instruction will result in zero.

Reg A	1 1 0 0 1 0 0 0
Reg A	1 1 0 0 1 0 0 0
	0 0 0 0 0 0 0 0

Taking each order of bits they are always the same, so the result will be zero. This is a simple one byte instruction for clearing the accumulator, and does not effect the zero or carry bits in the flag register.

These are by no means all the uses that logic functions can be put to, for a more detailed explanation of truth table and logic functions see Ian Sinclair's series of articles 'Microprocessors By Experiment' in CT, October 1979 issue.

ADD and SUB

The ADD and SUB instructions are self explanatory, except for stating that when an addition results in an overflow, the carry bit is set. Similarly, when a subtraction results in an underflow the carry bit is set. This enables the 'ADD with Carry' and 'SUB with Carry' instructions to take into account the result of a previous arithmetic process.

Increment and Decrement

These instructions are also self explanatory, setting the zero flag when the result is zero.

COMPARE

This is the last instruction of the group and one of the most

commonly used. A compare instruction functions as a phantom 'SUBTRACT', setting all the flags as though the subtraction had taken place, but without modifying any register contents.

e.g. Compare accumulator set to '46' Hex with
Reg B set to '80' Hex

After comparison the CARRY bit will be set, the accumulator will be '46' Hex and register B '80' Hex.

Jump And Subroutine Instructions

In part 1 flags were dealt with in detail and it was stated that these were used for decision making. The decisions are made with Jump and Subroutine instructions.

Take, for example, a simple library of actions which might be listed on the display as follows:—

1. Display 'Example'
2. WAIT 2 secs.
3. Clear the CRT
4. END

Enter your choice:—

To choose, a '1', '2', '3' or '4' is entered from the keyboard. On receipt of the choice the program must decide which option is required. One way would be to use CONDITIONAL JUMP instructions, as shown in the flowchart, Fig.6.

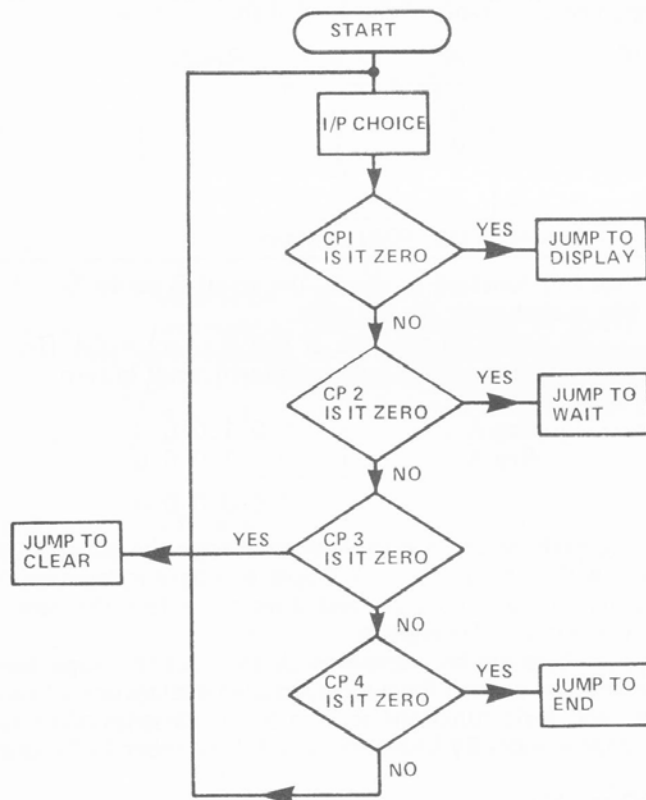


Fig.6. Flowchart showing conditional jumps.

The first decision box, symbolised as a diamond, first *compares* the input with '1'. If the ZERO flag is set then the answer to the question 'Is it Zero' will be 'yes' and a jump can be made to the 'Display' routine. The decision and the jump operations are combined in a single 'JUMP IF ZERO' instruction. If the answer was 'NO' because it was '2', '3' or '4' that was keyed, then the jump part of the instruction would be omitted. This would in our example be repeated for 'Is it 2', 'Is it 3' and 'Is it 4'.

Typical jump instructions are:—

- Jump if Zero
- Jump if Not Zero (i.e. Z Flag not set)

- Jump if Carry
- Jump if No Carry (i.e. C Flag not set)
- Jump if Parity Odd (i.e. Parity Flag is not set)
- Jump if Parity EVEN (i.e. Parity Flag set)
- Jump if Sign NEG (i.e. Bit 7 is 1)
- Jump if Sign POS (i.e. Bit 7 is zero)
- Jump UNCONDITIONAL (Jump irrespective of flags)

The subroutine instructions follow a similar pattern. If any of the above conditions are encountered, then a call can be made to a separate part of the program designated to carry out a particular function.

For example, if a program is counting the days of the week, when it encounters '8' it should be reset to 1.

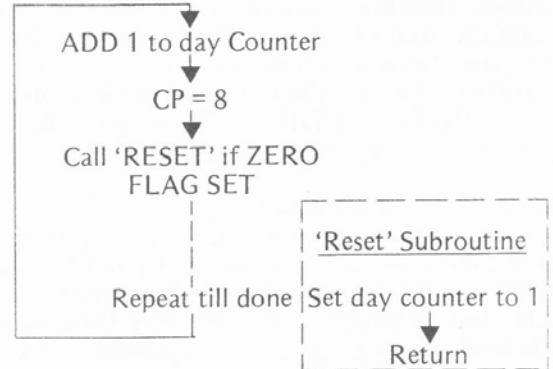


Fig.7. Jumping to a subroutine on a conditional.

As for the condition subroutine call instructions, so too are there conditional subroutine return instructions. We will return (no pun intended) to subroutines later when discussing program structure. Note that all subroutine instructions make use of the stack to store return addresses.

One last point on jump and subroutines is the relative jumps and subroutines offered by some CPU and/or monitors. Here, instead of the 3 byte absolute instructions specifying the literal address the jump or 'call' has to be made to, an offset figure is given 'relative' to the location address of the jump instruction. These can be both forward or backward and up to 7F Hex bytes distant. Table 1 gives a tabulated guide for relative jumps and calls. One advantage of such instructions is that a section of program containing relative jumps can be 're-located' without having to change any address data.

Bit Manipulation Instructions

So far consideration has only been given to instructions which operate on 1 or 2 bytes (i.e. 8 or 16 bits) of data held within a register or register pair. The flexibility of most CPU's is further increased by the ability to operate on individual bits within a register. The Zilog Z80 CPU has a very extensive bit manipulation group which can test, set or reset any bit in any register, but most other CPU's are limited to ROTATE AND SHIFT instructions.




Fig.8. Rotate left through carry.

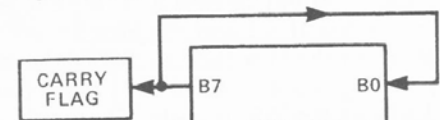


Fig.9. As Fig.8 but without a carry.

There are two types of rotate instruction, those that rotate *through* the carry flag and those that affect the carry but do not rotate through it. See Figs.8 and 9 respectively. Although these show rotation in a 'LEFT' direction, rotation in 'RIGHT' direction can also take place. On a rotate 'LEFT' instruction in Fig.8, Bit 7 will be passed into the carry flag which will be set if B7 has been '1' and reset if bit 7 had been '0'. The original contents of the carry flag will be passed into bit 0 and all other bits will move along one place.

One usage of this is in mathematical division of binary numbers. To divide a binary number by 2 or 4 the number need only be moved RIGHT one or two places respectively. So to test if a number is divisible by '4' without destroying the original number the following algorithm could be used.

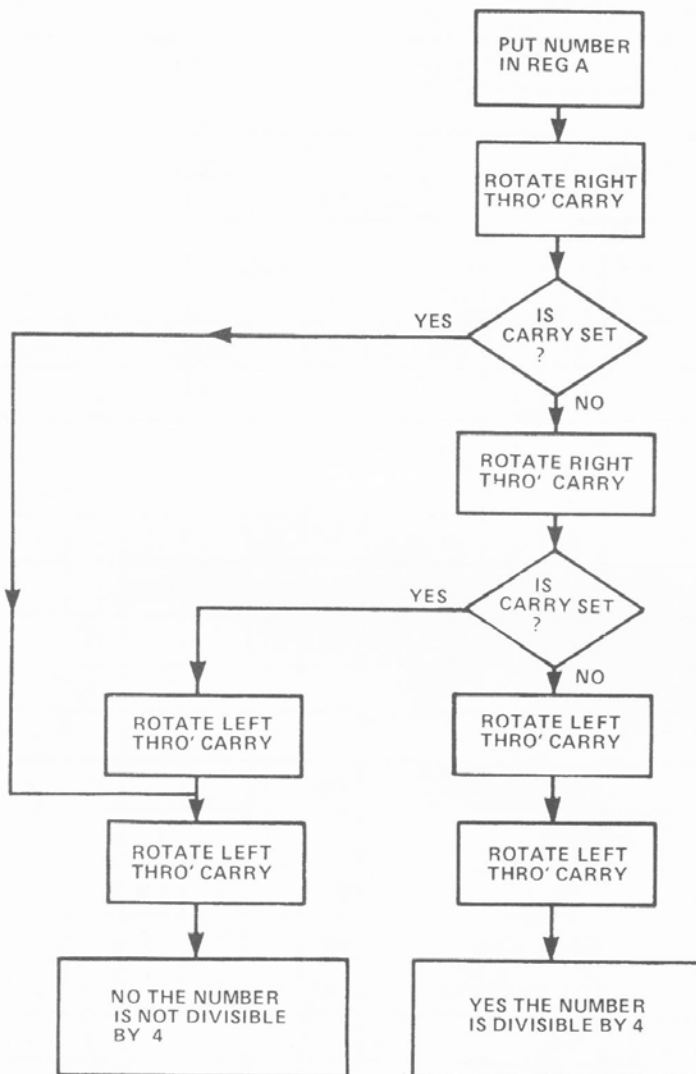


Fig.10. An algorithm to see if a binary number is divisible by 4.

Shift instructions differ from Rotate instructions in one respect only. Any 'bit' shifted out of a register at either end is lost. The vacancy at the other end normally being filled by a '0'. This technique is commonly used when a byte of data (8 bits) requires displaying on a CRT as two ASCII characters.

For more detailed explanation on the variants of these instructions consult the CPU operating manuals.

Bit Test, Set And Reset

This is a very powerful set of instructions and can be very

effectively put to use where the CPU is being used as an external device controller.

Some typical applications are given below :—

1. Flags can be set or reset in a dedicated 'Flag' memory location or register.
2. Having obtained a Random Number, individual bits can be tested to preset 'options'.
3. When data is input from a port, that data can be analysed by bit test instructions e.g. If a port is being used to monitor the progress of a train on a model railway, several monitoring positions can be set around the track and allocated a bit in the PORT as a window, see Fig.11.

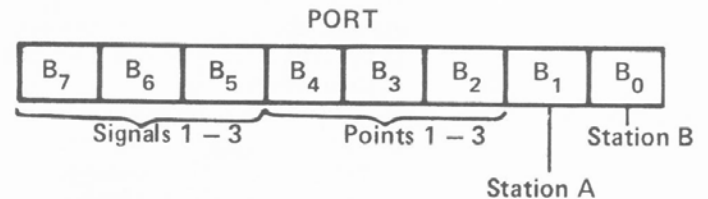


Fig.11. Analysing an input port's data.

If, for instance, you wanted to stop the train at station A, the program could sit in a holding loop monitoring Bit 1. When Bit 1 is detected as set it is known that the train is at that location and can be halted under program control.

4. External equipment can be switched by setting specific bits in a O/P Port. Continuing with the example shown in Fig.11 setting Bit 3, point 2 can be operated, by resetting B3 that point can be released.

Input And Output Instructions

Ports are often required when the CPU is to be interfaced with what we call Peripheral Equipment. i.e. Printers, Readers, Keyboards or any machinery that is to be controlled or observed. There are three main types of port, Non latching, Latching and Programmable Input/Output.

Non Latching:— A non latching port is of limited use because it requires separate decoding from the address bus and has to have the data available when the CPU requests it.

Latching:— This is more commonly used and the decoding is normally carried out within the system hardware. Here data can be either passed to the port for storage until required by the peripherals, or conversely will input data from a peripheral and store it until the CPU is ready to act on it. This technique is usually used for keyboard controllers etc.

Programmable input/output ports (PIA or PIO):— These can be very complex devices and the manufacturers application information must be carefully studied. In brief these devices can be programmed by software as input ports or output ports or a mixture of both simultaneously. Any data sent to a designated output port will be retained there until updated. A designated input port will also latch any input data but has the additional facility of INTERRUPT. Any bit or bits in the port can be continuously monitored by the port and any change of state will signal to the CPU that action is required. The interrupt instructions are all associated with this operation. Any further discussion on interrupt techniques is outside the scope of the beginner and therefore not appropriate to this article.

Restart Instructions

Built into the CPU architecture is a facility known as RESTARTS. Typically there are eight of these and they can be likened to subroutine call instructions, but are only *one byte*

MACHINE CODE

in length. These are provided so the commonly used sub-routines; such as INPUT, OUTPUT to CRT, STRING and DELAY can be accessed simply and economically from the program.

Miscellaneous Instructions

The most common miscellaneous instructions are listed below with comments.

NO OPERATION:	The CPU ignores this instruction, but takes time to do it. It is useful for leaving gaps for later modification, deleting an unwanted instruction or as a delay in a timing circuit.
HALT:	Arrests the operation of the program. The only way out is via the system RESET key.
DECIMAL ADJUST:	A very useful instruction as it permits a degree of decimal arithmetic on the Hexadecimal machine. e.g. after incrementing the A register from '09' to '0A' Hex the decimal adjust instruction will correct the result to '10'
COMPLEMENT:	The complement instruction will invert all bits in the accumulator. e.g. After a complement instruction 01001110 will become 10110001.
2's COMPLEMENT:	This is a special instruction included in some CPU's to ease binary division problems. After the '2's Complement' instructions 01001110 will become 10110010 i.e. the complement plus '1'.
COMPLEMENT CARRY FLAG:	These are self explanatory
SET CARRY FLAG:	

Index Addressing

The concept of indexed addressing seems to cause more confusion than anything else to the novice programmer, yet with thought and practice it can be developed as one of the most flexible and powerful of all operating modes.

Instead of a 16 bit register pair containing data to be operated on, it holds the 16 bit address of a memory location.

For example the Index Register may contain the address 'BFC4' which is part of a Jump instruction as shown in Fig.12.

ADDRESS	DATA
BFC2	NOP
BFC3	JUMP
BFC4	E4
BFC5	0D
BFC6	HALT

Fig.12. A section of machine code from BFC2 to BFC6.

A typical index instruction might be 'Put 'DC' Hex into the location whose address is in the INDEX REGISTER.

In our example the data in location BFC4 would change from 'E4' Hex to 'DC' Hex, and would at some later stage in the program cause a jump to address '0DDC' instead of '0DE4'. In this way a program can be organised so as to change itself as it progresses.

Similarly, indexing can be used to load into the A register the contents of the memory location addressing in the Index Register.


Some Index registers have an 'OFFSET' capability whereby the Index register can contain, for example, the starting address of a table. To access the 5th position in that table the instruction would be:— 'Load into Register A the contents of the memory location 5 in advance of the address in the Index Register'.

Next month we will take a look at the function of system monitors and the facilities that they can offer. Also a start will be made in putting together a real program.

Table 1. This chart gives the hexadecimal offset that has to be entered into the program to achieve a jump that corresponds to the decimal separation indicated on the axis.

	0	1	2	3	4	5	6	7	8	9
120	76	77	78	79	7A	7B	7C	7D	7E	7F
110	6C	6D	6E	6F	70	71	72	73	74	75
100	62	63	64	65	66	67	68	69	6A	6B
90	58	59	5A	5B	5C	5D	5E	5F	60	61
80	4E	4F	50	51	52	53	54	55	56	57
70	44	45	46	47	48	49	4A	4B	4C	4D
60	3A	3B	3C	3D	3E	3F	40	41	42	43
50	30	31	32	33	34	35	36	37	38	39
40	26	27	28	29	2A	2B	2C	2D	2E	2F
30	1C	1D	1E	1F	20	21	22	23	24	25
20	12	13	14	15	16	17	18	19	1A	1B
10	08	09	0A	0B	0C	0D	0E	0F	10	11
0				01	02	03	04	05	06	07
-0		FD	FC	FB	FA	F9	F8	F7	F6	F5
-10	F4	F3	F2	F1	F0	EF	EE	ED	EC	EB
-20	EA	E9	E8	E7	E6	E5	E4	E3	E2	E1
-30	E0	DF	DE	DD	DC	DB	DA	D9	D8	D7
-40	D6	D5	D4	D3	D2	D1	D0	CF	CE	CD
-50	CC	CB	CA	C9	C8	C7	C6	C5	C4	C3
-60	C2	C1	C0	BF	BE	BD	BC	BB	BA	B9
-70	B8	B7	B6	B5	B4	B3	B2	B1	B0	AF
-80	AE	AD	AC	AB	AA	A9	A8	A7	A6	A5
90	A4	A3	A2	A1	A0	9F	9E	9D	9C	9B
-100	9A	99	98	97	96	95	94	93	92	91
110	90	8F	8E	8D	8C	8B	8A	89	88	87
120	86	85	84	83	82	81	80			


ARRRGGGHHH.....

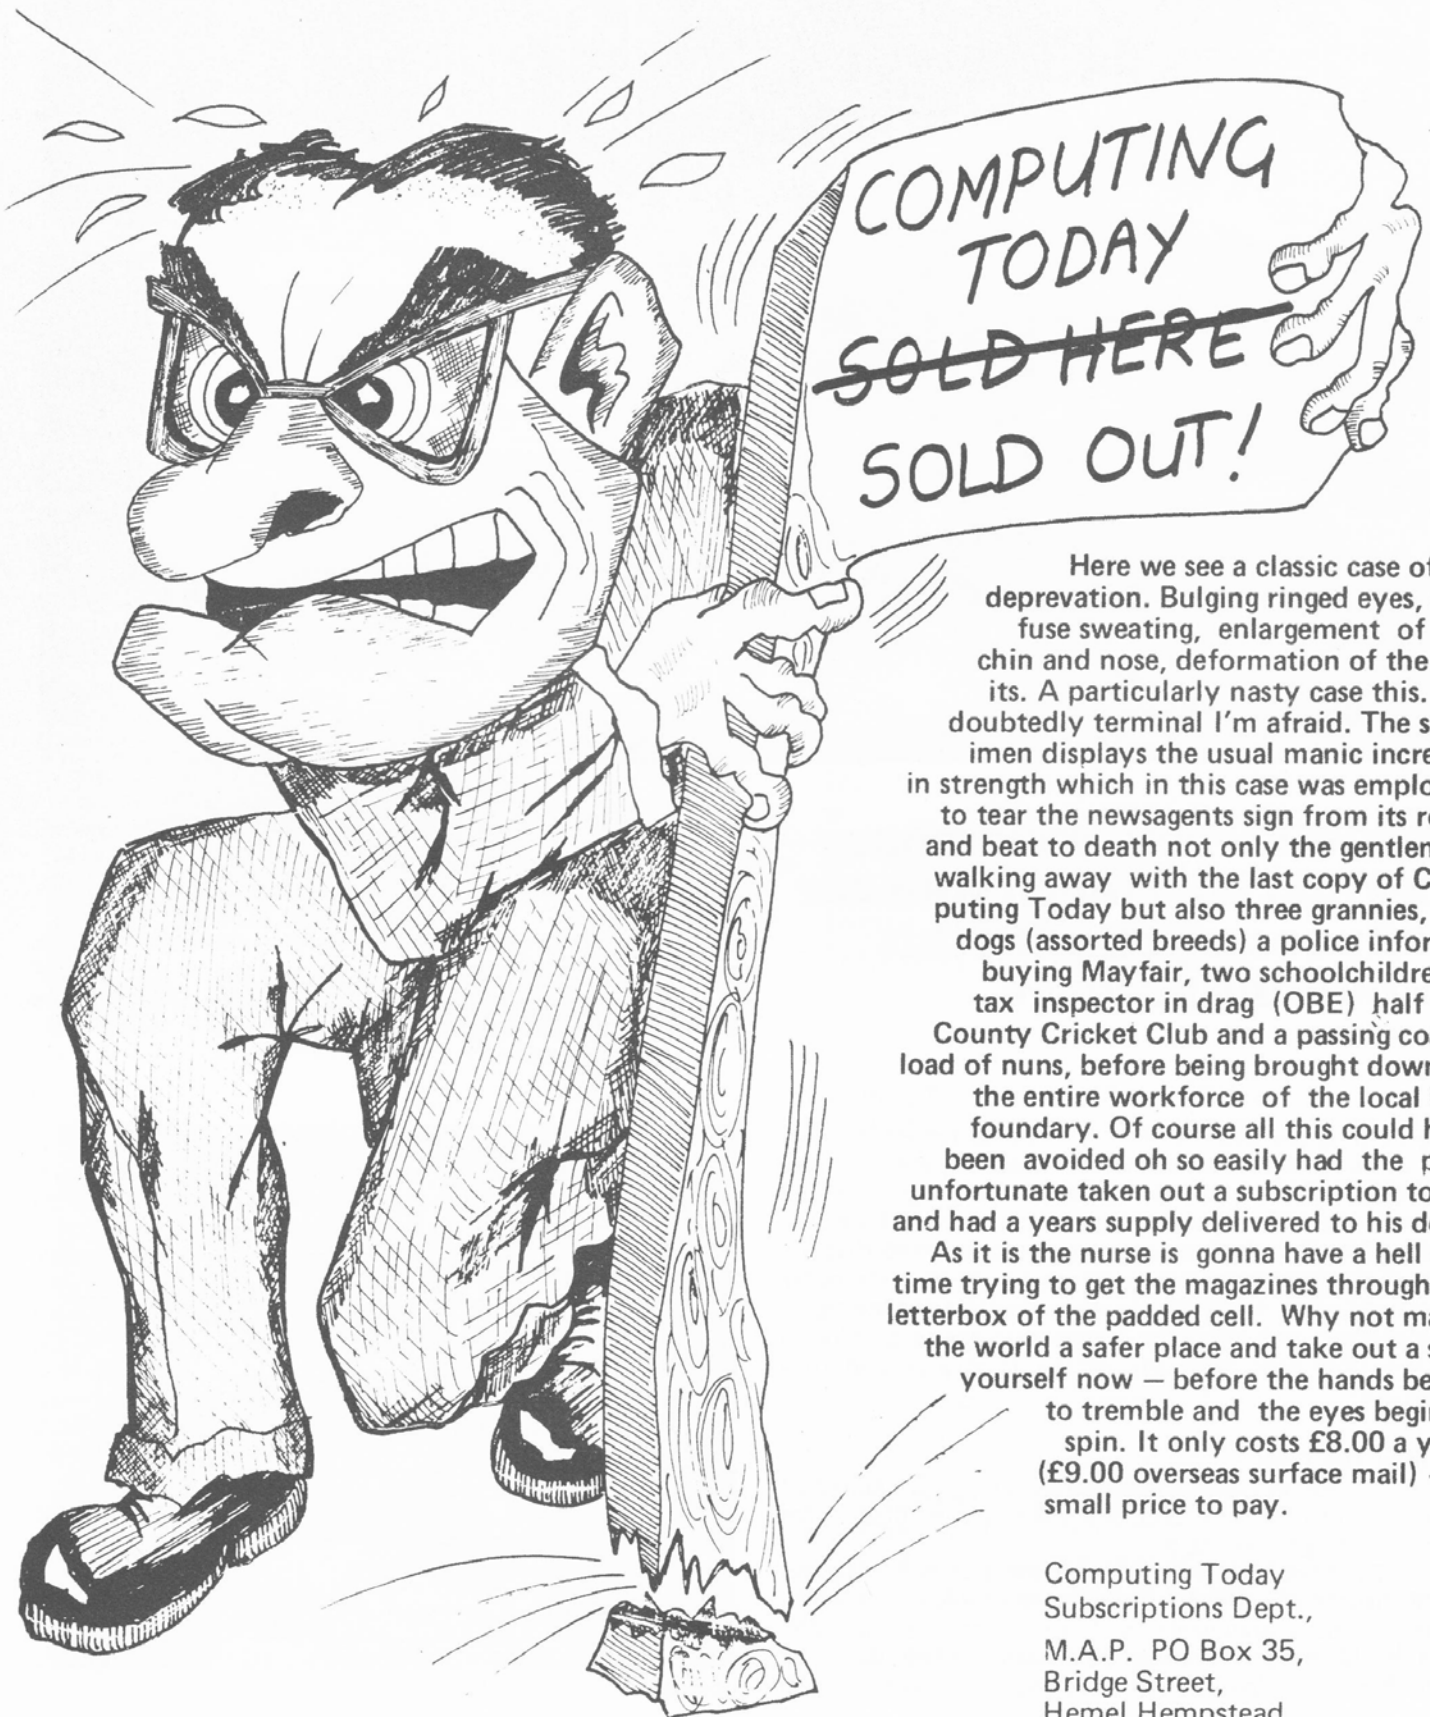

Here we see a classic case of CT depredation. Bulging ringed eyes, profuse sweating, enlargement of the chin and nose, deformation of the digits. A particularly nasty case this. Undoubtedly terminal I'm afraid. The specimen displays the usual manic increase in strength which in this case was employed to tear the newsagents sign from its roots and beat to death not only the gentleman walking away with the last copy of Computing Today but also three grannies, five dogs (assorted breeds) a police informer buying Mayfair, two schoolchildren, a tax inspector in drag (OBE) half the County Cricket Club and a passing coach load of nuns, before being brought down by the entire workforce of the local iron foundry. Of course all this could have been avoided oh so easily had the poor unfortunate taken out a subscription to CT and had a years supply delivered to his door.

As it is the nurse is gonna have a hell of a time trying to get the magazines through the letterbox of the padded cell. Why not make the world a safer place and take out a sub yourself now — before the hands begin to tremble and the eyes begin to spin. It only costs £8.00 a year (£9.00 overseas surface mail) — a small price to pay.

Computing Today
Subscriptions Dept.,
M.A.P. PO Box 35,
Bridge Street,
Hemel Hempstead,
Hertfordshire.

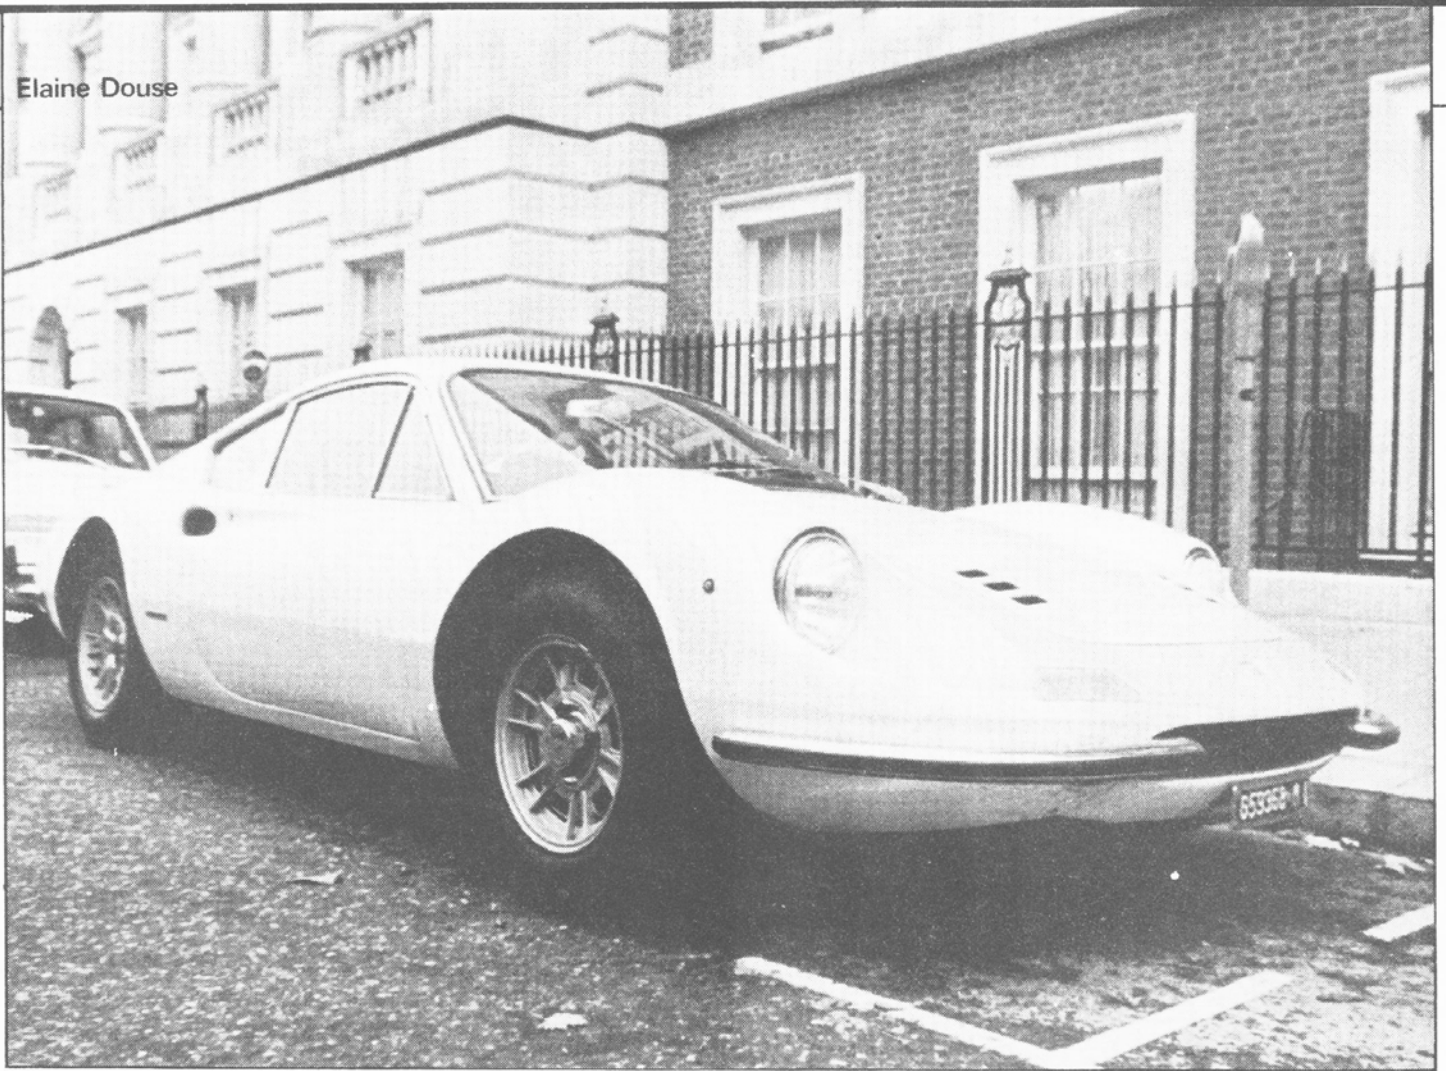

Discover where your money goes and how much your car really costs you with this accounting package.

This program evolved from a need to record the fuel consumption of a vehicle. On acquiring a moped, the author then required that the same program would cope with the differing sets of figures that the vehicles would provide. The first, and most important point, was that the scales of the histograms produced would not be cramped by being fixed. This program sets its own scales depending on the maximum and minimum figures that are to be plotted and will now cope with any vehicle from a moped to a juggernaut!

Petrol In The Tank

Fuel consumption is best calculated by noting the amount of petrol put into the tank, and, when the tank is filled to the brim, recording the mileage.

The next problem is whether the average fuel figures or the figures at each tank filling stage should be recorded. There are many arguments for both methods, so, to compromise, this program records them both. To help show any small change it is possible to reset the datum point which

will clear all variables except the previously recorded graph information.

Running Costs

We only have to add one more figure to our information in order to calculate the running costs and that is the costs of petrol and repairs. The repairs side can be split into three categories, thus :—


- a) Depreciation
- b) Servicing
- c) Repairs

The depreciation is a difficult figure to program in because it is a highly individual subject. It depends on so many variables that it was thought best left to the individual to input as a repair cost.

The repairs and servicing are kept separate in order that the computer's 'long memory' can be utilised to give servicing reminders. For example, a windscreen does not have a 'life expectancy' and so would be put in under REPAIRS, whereas a new tyre does have a life and so would be put under SERVICING. There does not have to be any cost involved for service reminders so things like battery check and tyre pressures can be logged into the computer's memory.

When one is finished with the refuelling part of the program an automatic search is made to see if the last recorded mileage figure is close to the end of a component's life. One also has the option of losing or keeping any reminders that are encountered, in case one cannot deal with a particular problem at that particular time but want to be reminded later on.

MOTORING FINANCE

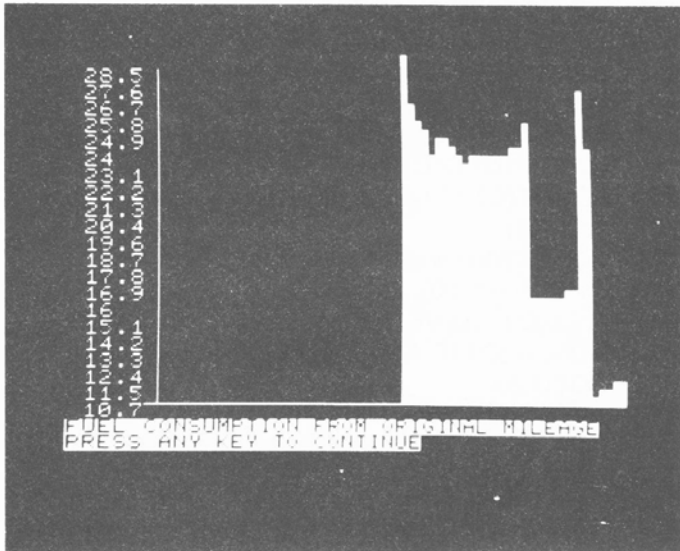


A partly filled graphic display of running costs — note the differing scales.

```

What component have you replaced
? NEARSIDE FRONT TYRE
What is it's expected life (in miles)
? 35000
What is the cost? 28.12
    
```

Now you've replaced that tyre you can enter the costs into the program along with its expected life.

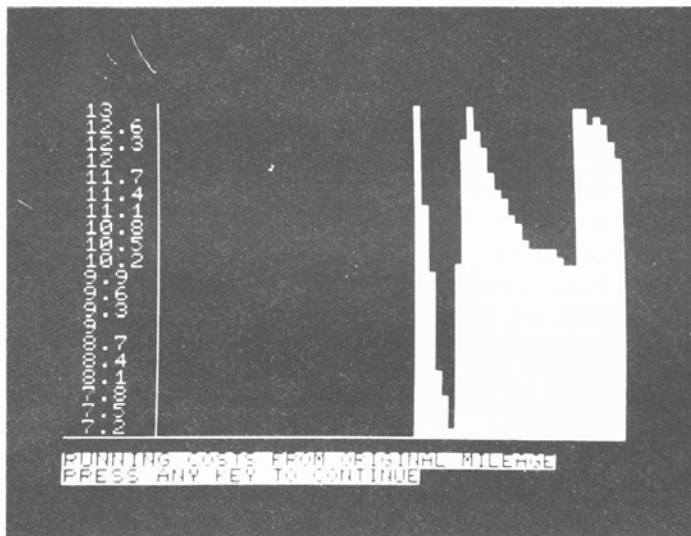

A fuel consumption display with the scales set from min to max.

```

REMINDEE
NEARSIDE FRONT TYRE
NEEDS CHECKING
AT 62100

Do you want this kept?
PRESS Y OR N
    
```

A tyre may be nearing the end of its life so you get a service reminder.

The Program Listing

The program is listed for the Commodore PET using the following abbreviations:

?	Pet shorthand for PRINT onto VDU
[CLR]	Clear screen, put cursor in top left hand corner
[CD]	Cursor down
[CU]	Cursor up
#	Hash when in conjunction with PRINT to file number
#	Not equal to when in an IF statement
[HOME]	Put cursor to top left of screen
[REV]	Reverse graphics on
[REV OFF]	Reverse graphics off

```

10 INPUT"[CLR] NAME PLEASE";A$
20 IF A$#["PASSWORD"] THEN NEW
25 POKE 59468, 14
30 DIM RC%(66),FC%(66),FT%(66),RM(100),RMS(100)
40 INPUT"[CD] Is this a first run";A$
50 INPUT"[CD] Vehicle registration";CR$
60 IF LEFT$(A$,1)="Y" THEN 190
62 ?"[CD] INSERT [REV] "CR$"[REV OFF] [SPACE] DATA TAPE AND
64 ?"[CD] FULLY REWIND
66 GOSUB 750
70 OPEN 1,1,0,CR$
75 ?"[CD] FILE "CR$"[SPACE] FOUND
80 FOR I=1 TO 66:INPUT#1,RC%(I):NEXT
85 FOR I=1 TO 66:INPUT#1,FC%(I):NEXT
90 FOR I=1 TO 66:INPUT#1,FT%(I):NEXT
95 I=0
100 INPUT#1,RM(I):IF RM(I)=999 THEN 115
105 INPUT#1,RMS(I)
    
```

```

110 I=I+1:GOTO 100
115 RM(I)=0:INPUT#1,F
120 INPUT#1,F1
125 INPUT#1,PC
130 INPUT#1,M
135 INPUT#1,M1
140 INPUT#1,M2
145 INPUT#1,C
146 INPUT#1,C1
147 INPUT#1,C2
150 CLOSE 1
160 ?"[CLR] THE RECORDS ARE LOADED FOR
"CR$
170 ?"[CD] MILEAGE AT LAST UPDATE WAS"M2
180 GOSUB 750:GOTO 200
190 INPUT"[CD] Original mileage please";M
195 M1=M: M2=M: C=0: C1=0: C2=0: F=0: F1=0
200 ?"[CLR] MOTORING COSTS by Elaine Douse
210 ?TAB(5)"[CD] 1. REFUELLING
220 ?TAB(5)"[CD] 2. REPAIRS
230 ?TAB(5)"[CD] 3. SPARE PARTS AND SERVICING
240 ?TAB(5)"[CD] 4. CONSUMPTION TANK TO TANK
250 ?TAB(5)"[CD] 5. RUNNING FUEL CONSUMPTION
260 ?TAB(5)"[CD] 6. RUNNING COSTS FROM START
270 ?TAB(5)"[CD] 7. SERVICE REMINDERS
280 ?TAB(5)"[CD] 8. JOURNEY COSTS
290 ?TAB(5)"[CD] 9. TAPE UPDATE
295 ?TAB(4)"[CD] 10. NEW MILEAGE DATUM
300 INPUT"[3xCD] Which section do you require";A
310 IF A#INT(A) OR A > 10 OR A < 1 THEN 200
315 P=33654
320 ON A GOTO 1000, 2000, 3000, 4000, 5000, 6000,
7000, 8000, 9000, 190
750 ?"[CD] [REV] PRESS ANY KEY TO CONTINUE":
GOTO 810
800 ?"[CD] [REV] PRESS 'Y' OR 'N'
810 GET A$:IF A$=" " THEN 810
820 RETURN
1000 ?"[CLR] Is this a tankfull?
1010 GOSUB 800
1020 IF A$="N" THEN 1200
1030 FOR I=1 TO 65:FC%(I)=FC%(I+1):FT%(I)=FT
%(I+1):RC%(I)=RC%(I+1):NEXT
1040 GOSUB 1800
1050 FC%(66)=(M2-M1)/F1*10
1060 FT%(66)=(M2-M)/(F+F1)*10
1070 RC%(66)=(C/(M2-M))*10
1080 M1=M2:F=F+F1:F1=0:C2=0:C1=0
1090 ?"[CLR] Here are the latest computations:-
1100 ?"[CD] Fuel consumption tank to tank":? FC
%(66)/10"mpg ("FC%(65)/10")
1110 ?"[CD] Average fuel consumption":? FT%(66)/
10"mpg ("FT%(65)/10")
1120 ?"[CD] Running costs":?RC%(66)/10"ppm ("RC
%(65)/10")
1125 ?"[CD] Fuel costs are"PC" pounds per gallon
1130 ?"[2xCD] HAVE YOU ANY MORE INPUTS
1140 GOSUB 800
1150 IF A$="Y" THEN 1000
1160 GOTO 7000

1200 GOSUB 1820:GOTO 1130
1800 ?"Last mileage recorded was "M2
1810 INPUT"[CD] What was the mileage";M2
1820 INPUT"[CD] How many gallons";F2:F1=F1+F2
1840 INPUT"[CD] What was the cost of the fuel";C2:
C2=C2*100:C=C+C2+C1
1850 PC=INT(C2/F1+.005)/100:RETURN
2000 ?"[CLR]
2010 INPUT"What was the cost of the repairs";A
2020 C1=C1+(A*100)
2030 ?"[2xCD] HAVE YOU ANY MORE REPAIRS
2040 GOSUB 800:IF A$="Y" THEN 2000
2050 GOTO 200
3000 IF FRE(0) < 35 THEN 3030
3020 FOR I=0 TO 100:IF RM(I)=0 THEN 3100
3030 ?"[CLR] [REV] SORRY NO ROOM AT PRESENT
I WILL MOVE
3040 ?"[CD] [REV] YOU TO ANOTHER PART OF THE
PROGRAM
3050 FOR I=1 TO 2000:NEXT:GOTO 6000
3100 ?"[CLR] What component have you replaced
3105 INPUT RM$(I)
3110 ?"[CD] What is its expected life (in miles)
3115 INPUT A
3120 RM(I)=A+M2
3130 INPUT"[CD] What is the cost";A:C1=C1+(A*100)
3150 ?"[CD] Have you any more items?
3160 GOSUB 800
3170 IF A$="Y" THEN 3000
3180 GOTO 200
4000 POKE 59468, 12:?"[CLR] ":MI=9999
4005 FOR I=1 TO 66:IF FC%(I)=0 THEN 4020
4006 IF FC%(I) < MA THEN 4020
4010 MA=FC%(I)
4020 IF FC%(I) > MI THEN 4028
4022 MI=FC%(I)
4028 NEXT:X=(MA-MI)/40
4030 GOSUB 10000:GOSUB 11000
4040 ?"[REV] FUEL CONSUMPTION TANK TO TANK
[CU]
4050 GOSUB 12000
4060 FOR I=1 TO 65 STEP 2
4070 A=FC%(I):B=FC%(I+1)
4080 GOSUB 13000:NEXT
4090 GOSUB 11000:GOSUB 750:MA=0:POKE 59468,14:
GOTO 200
5000 POKE 59468, 12:?"[CLR] ":MI=9999
5005 FOR I=1 TO 66:IF FT%(I)=0 THEN 5028
5006 IF FT%(I) < MA THEN 5020
5010 MA=FT%(I)
5020 IF FT%(I) > MI THEN 5028
5022 MI=FT%(I)
5028 NEXT:X=(MA-MI)/40
5030 GOSUB 10000:GOSUB 11000
5040 ?"[REV] FUEL CONSUMPTION FROM ORIGINAL
MILEAGE [CU]
5050 GOSUB 12000
5060 FOR I=1 TO 65 STEP 2
5070 A=FT%(I):B=FT%(I+1)
5080 GOSUB 13000:NEXT

```

MOTORING FINANCE

```

5090 GOSUB 11000:GOSUB 750:MA=0:POKE 59468,14:
      GOTO 200
6000 POKE 59468, 12:?"[CLR]":MI=9999
6005 FOR I=1 TO 66:IF RC%(I)=0 THEN 6028
6006 IF RC%(I) < MA THEN 6020
6010 MA=RC%(I)
6020 IF RC%(I) > MI THEN 6028
6022 MI=RC%(I)
6028 NEXT:X=(MA-MI)/40
6030 GOSUB 10000:GOSUB 11000
6040 ?"[REV] RUNNING COSTS FROM ORIGINAL
      MILEAGE [CU]
6050 GOSUB 12000:
6060 FOR I=1 TO 65 STEP 2
6070 A=RC%(I):B=RC%(I+1)
6080 GOSUB 13000:NEXT
6090 GOSUB 11000:GOSUB 750:MA=0:POKE 59468,14:
      GOTO 200
7000 ?"[CLR]
7005 ?"I am looking for service reminders
7010 FOR I=1 TO 2000:NEXT
7020 FOR I=0 TO 100
7030 IF RM(I)=0 THEN 7060
7040 IF RM(I) < M2+200 THEN 7100
7060 NEXT
7080 ?"[CD] Search is complete":GOSUB 750:GOTO 200
7100 ?"[CD] [REV] REMINDER [REV OFF] [CD] "RM$(
      I):?"NEEDS CHECKING
7120 ?"[CD] AT"RM(I)
7140 ?"[2xCD] Do you want this kept?
7160 GOSUB 800
7180 IF A$="Y" THEN 7060
7200 RM$(I)=" ":RM(I)=0:GOTO 7060
8000 ?"[CLR] Is this a British (B) or a continental (C)
      journey
8002 INPUT A$:IF A$="B" THEN 8005
8004 INPUT"[2xCD] What is the fuel cost (per gall)";PC
8005 INPUT"[CD] length of journey";M9
8010 ?"[2xCD] With petrol at "PC" pounds per gallon
8020 ?"[2xCD] the cost of this journey will be as":"?
      follows:-
8040 Z=PC*(M9/FT%(66)*10):Y=RC%(66)*10*M9-Z
8060 ?"[2xCD] Fuel cost will be "INT(Z*100)/100"
      pounds
8080 ?"[2xCD] Fuel used will be "INT(M9/FT%(66)*M9/
      10)/100" pounds
8120 ?"[2xCD] Journey will cost "INT(RC%(66)*M9/
      10)/100" pounds
8200 ?"[3xCD]":GOSUB 750:GOTO 200
9000 PRINT"[CLR] FULLY REWIND "CR$" DATA
      TAPE
9005 A=1:GOSUB 750:POKE 244,2:POKE 243,122
9010 OPEN1,1,1,CR$
9020 FOR I=1 TO 66:PRINT#1,RC%(I):GOSUB 9400:
      NEXT
9040 FOR I=1 TO 66:PRINT#1,FC%(I):GOSUB 9400:
      NEXT
9060 FOR I=1 TO 66:PRINT#1,FT%(I):GOSUB 9400:
      NEXT
9080 FOR I=0 TO 30:IF RM%(I)=0 THEN 9140
9100 PRINT#1,RM(I):GOSUB 9400
9120 PRINT#1,RM$(I):GOSUB 9400
9140 NEXT:PRINT#1,"999":GOSUB 9400
9160 PRINT#1,F:GOSUB 9400
9180 PRINT#1,F1
9200 PRINT#1,PC:GOSUB 9400
9220 PRINT#1,M
9240 PRINT#1,M1:GOSUB 9400
9260 PRINT#1,M2
9280 PRINT#1,C:GOSUB 9400
9281 PRINT#1,C1
9282 PRINT#1,C2:GOSUB 9400
9300 CLOSE 1
9320 IF A=0 THEN 9360
9340 A=0:GOTO 9010
9360 PRINT"[REV] GOOD BYE":END
9400 IF PEEK(625) < 180 THEN RETURN
9410 POKE 59411,53:T=T1
9420 IF T1-T < 6 THEN 9420
9430 POKE 59411,61:RETURN
10000 FOR I=1 TO 20
10010 ?"[6xSPACE 1xSHIFTED]":REM VERTICAL
      LINE RIGHT HAND SIDE OF POSITION
10020 NEXT
10030 FOR I=1 TO 40
10040 ?"[SHIFTED HASH]":REM HORIZONTAL LINE
      TOP OF POSITION
10050 NEXT:RETURN
11000 ?"[HOME]":REM TOP LEFT HAND CORNER
      OF SCREEN
11010 FOR I=1 TO 21
11020 ?"[CD]":NEXT
11030 RETURN
12000 ?"[HOME]
12010 FOR I=MA TO MI STEP-2*X
12020 ?INT(I)/10
12030 NEXT:RETURN
13000 P=P+1:V=-40
13010 FOR J=MI TO MA STEP 2*X
13020 V=V-40
13030 IF A > J AND B > J THEN 13190
13040 IF A > J-X AND B > J THEN 13180
13050 IF A > J AND B > J-X THEN 13170
13060 IF A > J THEN 13160
13070 IF B > J THEN 13150
13080 IF A > J-X AND B > J-X THEN 13140
13090 IF A > J-X THEN 13130
13100 IF B > J-X THEN 13120
13110 GOTO 13210
13120 POKE P+V,108:GOTO 13210
13130 POKE P+V,123:GOTO 13210
13140 POKE P+V,98:GOTO 13210
13150 POKE P+V,225:GOTO 13200
13160 POKE P+V,97:GOTO 13200
13170 POKE P+V,252:GOTO 13200
13180 POKE P+V,254:GOTO 13200
13190 POKE P+V,160
13200 NEXT J
13210 RETURN

```


Britain's first comp

A complete personal computer for a third of the price of a bare board.

Also available ready assembled for £99⁹⁵

The Sinclair ZX80.

Until now, building your own computer could easily cost around £300 – and still leave you with only a bare board for your trouble.

The Sinclair ZX80 changes all that. For just £79.95 you get *everything* you need to build a personal computer at home...PCB, with IC sockets for all ICs; case; leads for direct connection to your own cassette recorder and black and white or colour television; everything!

And yet the ZX80 really is a complete, powerful, full-facility computer, matching or surpassing other personal computers on the market at several times the price. The ZX80 is programmed in BASIC, and you could use it to do quite literally anything from playing chess to running a power station.

The ZX80 is pleasantly straightforward to assemble, using a fine-tipped soldering iron. Once assembled, it immediately proves what a good job you've done. Connect it to your TV set...link it to an appropriate power source*... and you're ready to go.

Your ZX80 kit contains...

- Printed circuit board, with IC sockets for all ICs.
- Complete components set, including all ICs – all manufactured by selected world-leading suppliers.
- New rugged Sinclair keyboard, touch-sensitive, wipe-clean.
- Ready-moulded case.
- Leads and plugs for connection to domestic TV and cassette recorder. (Programs can be SAVED and LOADED on to any portable cassette recorder.)
- FREE course in BASIC programming and user manual.

Optional extras

- Mains adaptor of 600 mA at 9 V DC nominal unregulated (available separately – see coupon).
- Additional memory expansion boards allowing up to 16K bytes RAM. (Extra RAM chips also available – see coupon.)

*Use a 600 mA at 9 V DC nominal unregulated mains adaptor. Available from Sinclair if desired (see coupon).

Two unique and valuable components of the Sinclair ZX80.

The Sinclair ZX80 is not just another personal computer. Quite apart from its exceptionally low price, the ZX80 has two uniquely advanced components: the Sinclair BASIC interpreter; and the Sinclair teach-yourself BASIC manual.

The unique Sinclair BASIC interpreter... offers remarkable programming advantages:


- Unique 'one-touch' key word entry: the ZX80 eliminates a great deal of tiresome typing. Key words (RUN, PRINT, LIST, etc.) have their own single-key entry.
- Unique syntax check. Only lines with correct syntax are accepted into programs. A cursor identifies errors immediately. This prevents entry of long and complicated programs with faults only discovered when you try to run them.
- Excellent string-handling capability – takes up to 26 string variables of any length. All strings can undergo all relational tests (e.g. comparison). The ZX80 also has string input-to request a line of text when necessary. Strings do *not* need to be dimensioned.
- Up to 26 single dimension arrays.
- FOR/NEXT loops nested up to 26.
- Variable names of any length.
- BASIC language also handles full Boolean arithmetic, conditional expressions, etc.
- Exceptionally powerful edit facilities, allows modification of existing program lines.
- Randomise function, useful for games and secret codes, as well as more serious applications.
- Timer under program control.
- PEEK and POKE enable entry of machine code instructions, USR causes jump to a user's machine language sub-routine.

- High-resolution graphics with 22 standard graphic symbols.
- All characters printable in reverse under program control.
- Lines of unlimited length.

...and the Sinclair teach-yourself BASIC manual.


If the features of the Sinclair interpreter listed alongside mean little to you – don't worry. They're all explained in the specially-written 128-page book *free* with every kit! The book makes learning easy, exciting and enjoyable, and represents a complete course in BASIC programming – from first principles to complex programs. (Available separately – purchase price refunded if you buy a ZX80 later.)

A hardware manual is also included with every kit or built machine.

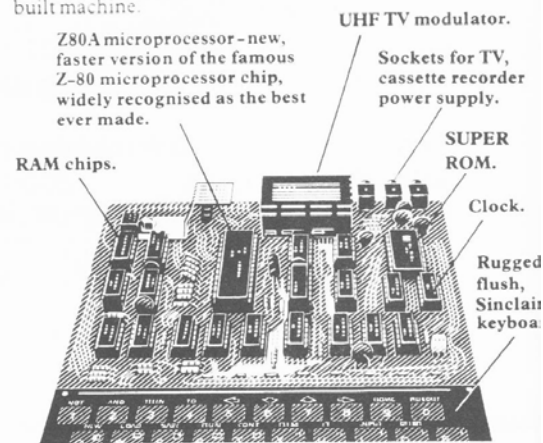

COMPUTING TODAY MAY 1980

Complete computer kit.

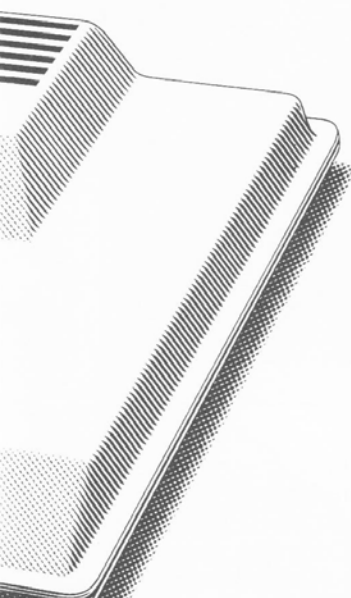

£79⁹⁵

**Including VAT.
Including post and
packing.
Including all leads
and components**

Fewer chips, compact design, volume production – more power per pound!

The ZX80 owes its remarkable low price to its remarkable design: the whole system is packed on to fewer, newer, more powerful and advanced LSI chips. A single SUPER ROM, for instance, contains the BASIC interpreter, the character set, operating system, and monitor. And the ZX80's 1K byte RAM is roughly equivalent to 4K bytes in a conventional computer – typically storing 100 lines of BASIC. (Key words occupy only a single byte.)

The display shows 32 characters by 24 lines.

And Benchmark tests show that the ZX80 is faster than all other personal computers.

No other personal computer offers this unique combination of high capability and low price.

The Sinclair ZX80. Kit: £79.95. Assembled: £99.95. Complete!

The ZX80 kit costs a mere £79.95. Can't wait to have a ZX80 up and running? No problem! It's also available, ready assembled, for only £99.95.

Whether you choose the kit or the ready-made, you can be sure of world-famous Sinclair technology – and years of satisfying use. (Science of Cambridge Ltd is one of the Sinclair companies owned and run by Clive Sinclair.)

To order, complete the coupon, and post to Science of Cambridge for delivery within 28 days. Return as received within 14 days for full money refund if not completely satisfied.

Sinclair ZX80

Science of Cambridge Ltd

6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Tel: 0223 311488.

COMPUTING TODAY MAY 1980



Order Form

To: Science of Cambridge Ltd, 6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Remember: all prices shown include VAT, postage and packing. No hidden extras.

Please send me:

Quantity	Item	Item price £	Total £
	Sinclair ZX80 Personal Computer kit(s). Price includes ZX80 BASIC manual, excludes mains adaptor.	79.95	
	Ready-assembled Sinclair ZX80 Personal Computer(s). Price includes ZX80 BASIC manual, excludes mains adaptor.	99.95	
	Mains Adaptor(s) (600 mA at 9 V DC nominal unregulated).	8.95	
	Memory Expansion Board(s) (each one takes up to 3K bytes).	12.00	
	RAM Memory chips – standard 1K bytes capacity.	16.00	
	Sinclair ZX80 Manual(s) (manual free with every ZX80 kit or ready-made computer).	5.00	
NB. Your Sinclair ZX80 may qualify as a business expense.		TOTAL	£

I enclose a cheque/postal order payable to Science of Cambridge Ltd for £ _____

Please print

Name: Mr/Mrs/Miss _____

Address _____

CT/5/80

After light comes sound. Put ears on your micro with our simple sound interface.

This highly sensitive sound-operated interface plugs into the system in the same way as the LED interface described in Part 1. If you are using the Acorn, you can use the same connecting wire and socket. If you are using the Mk-14, you will need to remove the connection to Flag 2 output, and take it to SENSE A input, as explained later.

Circuit Description

The circuit is probably the most elaborate one that we shall be describing in this series, though it is by no means expensive or difficult to build. The main reason for its complexity is the need to amplify the minute currents produced by the microphone. The amplifying circuit consists of Q1, Q2 and Q3 and their associated components. When sound is received, a fluctuating voltage appears at the base of Q3. This is tapped at a suitable level by the wiper of RV1 and fed to Q5. This is the heart of the circuit and is a relatively unusual device called a silicon controlled switch. The main current flows from a to k but only after a high pulse has been received at the cathode gate (gk). So when a sound is received, any slight increase in voltage at gk makes Q5 begin to conduct. This turns D1 on, as an indication that the circuit has been triggered, and also turns Q6 on, causing the output to fall from high (+5 V) to low (0 V). This output is fed directly to the microprocessor system. Once the circuit has been triggered, it remains in this state. To reset it, the current to Q5 must be momentarily interrupted. This is done by turning off Q4. The 'reset' input should normally be high (+5 V), but if it is brought low for an instant, Q4 is turned off. The current through Q5 is reduced below its holding value and, when Q4 is turned on again, no current flows through Q5.

PARTS LIST

Resistors All 1/4W, 5%

R1	3M3
R2	820k
R3	39k
R4	10k
R5,9,11,12	1k0
R6	2k7
R7	1k8
R8	100k
R10	180R

RV1 1k0 preset

Capacitors


C1 47u electrolytic

Semiconductors

Q1,2,3,4,6	ZTX300
Q5	BRY39
LED1	TIL209

Miscellaneous

Veroboard, crystal microphone insert, 5way PCB plug.

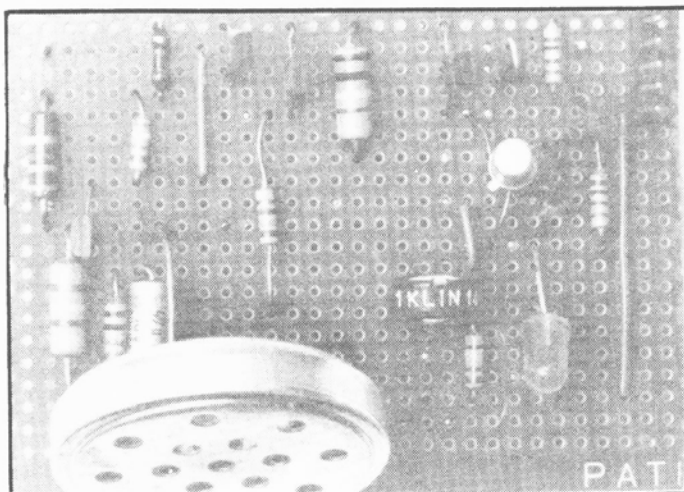

Veroboard layout, compare with Figure 2.

Construction

The circuit board layout is shown in Fig.2, the microphone is a cheap version, sold as a 'microphone insert'. It is supported on two stout connecting wires. If you have a microphone of better quality and can spare it for this task, there is no reason why it should not be used. The microphone can also be mounted and used remotely, if desired. It is best to begin by wiring up the amplifier section, including R6, RV1 and R7. If you then connect a crystal earpiece or headphone


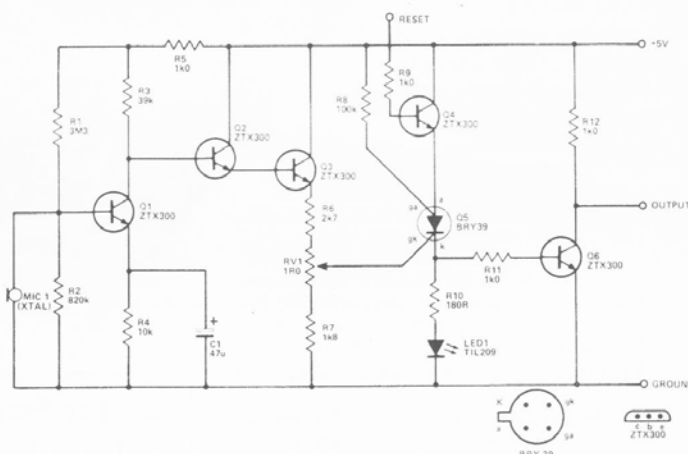


Fig.1. The sound triggered interface circuit diagram.

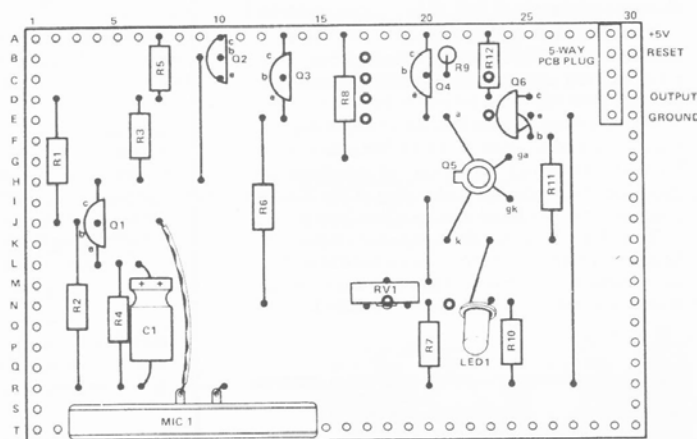

○ CUT STRIPS BENEATH BOARD AT
B17, C17, D17, E17, G23, E22, N18, N21

Fig.2. Veroboard layout for the circuit.

ACORN ATOM



The elegant injection moulded plastic case houses a full size professional keyboard and a hardware/software combination of extraordinary power and versatility; in the minimum price configuration the kit of parts provided allows BASIC and ASSEMBLER, graphics and sound output, direct cassette and T.V. interface and much more. Sockets and connectors allow for expansion *within* the case to allow features normally associated with computers costing ten times as much.

Every kit is sent with assembly instructions and a beginners guide to Atom BASIC, ASSEMBLER and operating system.

The basic unit in kit form costs £120 plus VAT and postage, total £143.00. Prices and details of ready built units and accessories on request. Delivery in beginning of May.



Acorn Computer Ltd.,
4a Market Hill,
Cambridge, CB2 3NJ
Tel. (0223) 312772

- Fast 32-bit Integer BASIC
- Floating point math routines (10 digit)
- Mnemonic Assembler
- Cassette load and save
- 16 letter file names
- Graphics Plot, Draw and Move
- Screen editor
- Timer function
- Many extended BASIC features

- 192 Graphics characters
- 5 Graphics modes
- High resolution (256 x 192)
- Internal speaker
- Printer output
- UHF output
- Monitor output
- Colour output
- Communication loop
- Cassette I/O
- 24 User I/O lines
- Internal socket for any Acorn card
- Acorn bus output

CT COMPUTING GLOSSARY

A far cry from your 'Hundred Best Tunes'. Our Buzzword guide to the computer vernacular from P.D Reynolds.

A

Address The number, eg 62768, identifying a place in *memory*.

Aluminised (paper) Printer paper surfaced with a thin deposit of metal. The characters are formed by darkening caused by electric current flowing onto the paper from the pins of a matrix print head.

ASCII American Standard Code for Information Interchange — representing letters, numbers etc by the 128 permutations of a 7-bit code.

Assembler Program which converts the low-level mnemonic instructions of assembly language to the binary machine language instructions required to drive a *central processor*.

B

BASIC Beginners' All-purpose Symbolic Instruction Code — a 'popular' high-level programming language developed at Dartmouth College, USA.

Batch (Processing) A method of computer working in which a large number of transactions are grouped together before processing (so that control totals etc can be taken) and which are then passed through the various stages of processing as a group or batch. This was the original method of data processing for commercial work and contrasts with *interactive* and demand processing.

Baud A rate of data transmission commonly, though strictly not correctly, taken as synonymous with bits per second.

BCD Binary Coded Decimal — a 4-bit system for representing the 10 decimal digits.

Benchmark A standard computing task used to measure the relative speeds of different processors.

Binary Numbering system with the base 2, using the digits 0 and 1 instead of the decimal series 0 to 9. All digital computers work on data and instructions presented as binary numbers.

Bit Binary digit (contraction). Must be 0 or 1.

Block A sequence of *data words* or *bytes* treated as a unit, especially when working with magnetic tape.

Data base A system for organising the elements of information in a machine-readable file so that a program can readily select from this data base any particular abstraction or combination of information that may be called for. For instance, a customer data base might include full details of all customers (as required for service and distribution departments as well as sales and marketing) and also of every service call and delivery as well as each item invoiced to these customers during a year or longer. A suitable program could access that data base to answer such questions as 'Identify the customers buying more than £1,000 of item in less than five deliveries and receiving less than two service calls in the year.'

Debug To correct the errors in a program.

Disk (Disk) Magnetic storage device allowing fast random access to any selection from a large volume of *data*. A full-size hard disc will hold say 5 megabytes or more, a smaller *floppy* disc typically holds from 80 to 250 kilobytes but in either case the capacity is being increased all the time.

Diskette A *floppy* disc, especially the smaller 5 $\frac{1}{4}$ " size.

DOS Disc Operating System — a computer operating system held on magnetic disc rather than in ROM. An initialisation process will copy the operating system into memory whenever the computer is first turned on. Also an operating system which controls the disc themselves and may supplement, rather than replace, the computer's original operating system.

Dynamic (memory) Random Access Memory (RAM) requiring constant refresh signals but normally using less electrical power than *static* memory.

Duplex A mode of data transmission where each station can send and receive simultaneously.

E

EAROM Electrically Alterable Read Only Memory. Typically taking 10 msec to erase and 1 msec to write, this non-volatile storage might better be considered as 'Read Mostly Memory' as the write capability is likely to be limited to say 100,000 cycles.

EPROM Erasable Programmable Read Only Memory. Writing typically takes one minute and erasing, by ultra violet light, 10 minutes or longer.

Edit Alteration of text in program or data files. Often necessary, some systems make editing easier than others.

Intelligent terminal An input/output device which includes its own logic circuits and memory so that, for instance, data may be validated or changed in format before transmission to the main computer.

Interactive A working arrangement under which the computer reacts immediately to respond to any mistakes which may be made by the user or to reply to his enquiries as soon as they are expressed. In some business activities, as also in program writing, this leads to much faster progress than would otherwise be possible.

Interface The interconnection arrangements between a computer and devices, such as printer or modem, attached thereto.

Interpreter A program to translate a high level language (typically BASIC) to machine language and to execute each instruction, line by line, immediately.

Interrupt A signal which suspends processing to allow some other command to be obeyed.

K

K Abbreviation of Kilo, normally meaning 1000, but 1024 (2¹⁰) when referring to *memory*.

Kansas (City) A standard for recording programs and data on cassette tape named after the city where a conference was held at which the standards were agreed.

L

Light pen A stylus with a light sensor which allows a computer to identify the point at which a Video Display Unit (VDU) screen is being touched.

Line printer A computer peripheral which prints a whole line at a stroke, instead of doing each character sequentially.

Load To copy a program (eg from tape or disc) into *memory*, ready for execution.

LSI Large Scale Integration — the combination of more than 100 logical gates (or decision switches) in a small silicon chip.

M

Machine Language (code) The lowest (and tediously detailed)

O

Operating System The computer's resident program which determines how instructions, input and output devices etc are managed.

Overlay A program too long for the available *memory* may be entered and processed by instalments, each segment overlaying or replacing the code previously stored while the various values allotted to common variables would continue from one program to the next.

P

Package A set of programs designed to perform a common task, eg payroll, generalised to suit a variety of users. A turn-key package may comprise both the programs and the equipment on which they run.

Pascal A program language, designed to facilitate structured programming especially on small interactive machines. Named after Gabriel Pascal.

Patch A small piece of computer program inserted in a longer program to remedy some bug or defect in it.

Peripheral Device attached to a central processor, eg printer, plotter, disc unit, but not necessarily essential to its use.

PILOT A programming language for small computers, designed to be particularly appropriate for teaching in schools.

Plotter Computer-driven graphical display using pen on paper.

PROM Programmable Read Only Memory.

R

RAM Random Access Memory. Might be better called 'read and write memory'. Access for reading or writing is normally by direct addressing and is fast, but not random.

Reset (button) A switch whereby computer control is returned to the monitor or low-level operating system and all internal variable values are changed to zero. This may be the only way of getting out of some endless loop which has arisen from a programming error.

Boot An instruction or very short program which will initiate a computer's operating system (short for bootstrap).

bps Bits Per Second — a rate of data transmission between devices. Eg 300 bps is a popular rate for some terminals, roughly equivalent to 30 characters per second (cps or chps).

Bubble memory A compact, high-capacity random access memory device which holds data as minute magnetic domains or 'bubbles'. The data is not lost when power is removed.

Buffer (1) An area of memory designated to hold data being transferred between devices working at different speeds, eg the fast processor and the slower keyboard, printer or disc.

(2) An electronic device in a signal path designed to allow signals to pass in one direction but to hold back unwanted reverse voltages which might damage the sending apparatus.

Bug An error in software.

Bus (sometimes spelt Buss) Basically means the multiple wiring common to several parts of a computer and the number of channels therein — eg a 16-bit bus addressing 64K memory locations or a 20-way bus addressing 1 megabyte. Bus is now generally identified with the pattern of connections to the plugs and sockets whereby optional units (eg more memory) may be connected to a computer.

Byte A unit of data 8 bits long.



CAD/II/L Computer Aided Design/Instruction/Learning.

Cartridge A protective carrier of magnetic tape (a variant of the familiar cassette) or disc.

Central processor The heart of a computer in which the actual program instructions are effected.

Chain A process whereby one computer program automatically follows another.

COBOL Common Business Oriented Language.

Compiler A program whose function is to read another program written in a high-level language, such as COBOL or FORTRAN, and convert it to machine code which a computer can obey.

CP/M Control Program/Microprocessor. A popular disc-based operating system for microcomputers using the 8080 and Z80 processors.

cps Characters (rarely cycles) Per Second (sometimes chps).

CPU Central Processing Unit — the heart of a computer, needing the addition of memory, interfaces, input/output devices and power supply.

CUTS Computer Users' Tape System — a standard for recording data on cassette tape.



Daisy wheel The typehead component of a sequential printer — like the 'golf ball' but faster — whose characters are held on the periphery of a serrated plastic disc.



Firmware A program residing in Read Only Memory (ROM).

Floppy (disc) A mass-storage device comprising a soft (floppy) plastic disc with magnetisable surface on which data is recorded and may be accessed rapidly by a moving read/write head. The disc, either 8" or 5 1/4" in diameter, rotates inside a protective cardboard sleeve.



FORTRAN FORmularTRANslation, an early and still popular high-level programming language, mainly used for scientific purposes.



Golfball A type of typewriter (or the print head from which it gets its name) in which the print characters are embossed on the surface of a sphere very similar in size to a golfball. Rotation of the sphere brings the appropriate character into line for each required impression. The process is usually slow (15 cps) but of good quality.



Hard copy A computer printout or listing on paper.

Hardware The physical elements of a computer (contrasted with software).

High-level language Programming language usually claimed to resemble a natural language and with powerful instructions, each generating several machine language instructions. Examples include BASIC, COBOL and FORTRAN.



I-EEE Institute of Electronic and Electrical Engineers (in USA) — a body which has set a number of standards for more orderly interchange of information between various electronic devices, including computers.

I/O Input/Output.

Impact (printer) One which forms characters by striking a ribbon onto paper and can therefore produce carbon copies.

Integer (BASIC) Concerned only with whole numbers, cutting off any fractions or decimal parts.

level of program instructions. All higher level coding must be converted to machine language (by compiler or interpreter) before a processor can obey it.

Mainframe A relatively large computer distinguished from the peripherals which, with the mainframe, complete the configuration. The term derives from times before integrated circuits, when processors were wired up with large numbers of separate components mounted on circuit cards or boards which were in turn mounted in metal racks or frames enclosed in one or more large metal cabinets.

Matrix (printer) A printer whose characters are formed by selecting a pattern of dots from a matrix typically 5 dots wide and 7 high.

Memory Immediate access data storage, directly addressable by a central processor and typically comprising a combination of RAM and ROM chips.

Micro — (also μ) Prefix signifying one millionth. Also used descriptively of something very small, though not as small as nano— or pico—.

Microprocessor An LSI chip holding a complete processor (arithmetic logic unit and control unit).

Microprogram A very low-level of programming, normally implemented in ROM by the processor's manufacturer, to increase in effect the set of instructions which the processor can obey.

Minicomputer A somewhat vague term for the middle range of computers. Machines addressing up to 64K bytes or words of memory tend (at the present time) to be called Microcomputers and machines able to address more than 64K memory locations tend to be called Minicomputers unless they separate into distinct parts, in which case the processor part may be called a Mainframe.

Mini-floppy The smaller size of floppy disc, 5 1/4" in diameter.

Modem Acronym for MOdulator/DEModulator — a device adapting computer data for transmission by telephone line and vice versa.

Monitor The first level of computer operating systems: the program which turns machine code commands into action, managing input, output etc.



n-sec Nanosecond, one-thousand-millionth of a second.

Computing today

Return The key and corresponding computer instruction which sends the contents of keyboard buffer into a computer's memory for execution (term derives from 'carriage return' on a typewriter).

ROM Read Only Memory.

RS232 A communications interface protocol used for modems and for serial printers.

RUN The instruction to execute a program.



S-100 Name of a bus or connection standard shared by many manufacturers and employing 100 connection positions. Unfortunately, there are some minor variations between different manufacturers' versions of the S-100 bus but the I-EEE has now defined a universal standard for it. Primarily designed as a memory bus and not for general purpose use.

Software The different kinds of program required to work a computer.

Source code A program written in one of the high-level languages and requiring compilation into machine language before use.

Static RAM Random Access Memory which does not require continuous refresh signals but tends to use more power than Dynamic RAM and still loses its contents when power is removed.

String A sequence of alphanumeric characters.



Terminal A device, normally remote from the computer, at which data can enter or leave a communication network — eg a teletypewriter working over telephone lines.

Thermal (Printer) A matrix printer wherein the print impression is made by heating a selected pattern of wires within a matrix (say 5 x 7) so that the heat causes points on the specially-treated paper to darken, to form the selected character.

Time-Sharing A method of operating a computer whereby two or more users apparently enjoy simultaneous access to and control of the machine. In practice what is happening is that the computer is attending to the users one at a time, but in a sequence of time intervals so short that none is normally aware of any delay.



VDU Visual Display Unit — a television-type screen on which computer messages can be displayed.




Word The specified number of bits that a computer is organised to process as a group — eg 16-bit word: but the popular 8-bit word is called a byte.

Word Processor A computer with software for entering, editing, storing, formatting and printing text, rather than processing figures.

MICROTAN 65

- A 6502 based microcomputer
- Expansion boards to make a full system
- VDU alphanumeric display on an un-modified domestic TV
- 1K RAM for user programme, stack and display memory
- Superb 1K monitor TANBUG
- Fully socketed
- 136 page software/hardware users manual with example programmes and A4 size!
- Intelligent keyboard socket accepts 20 key keypad or full ASCII board
- Optional lower case pack
- Optional chunky graphics pack

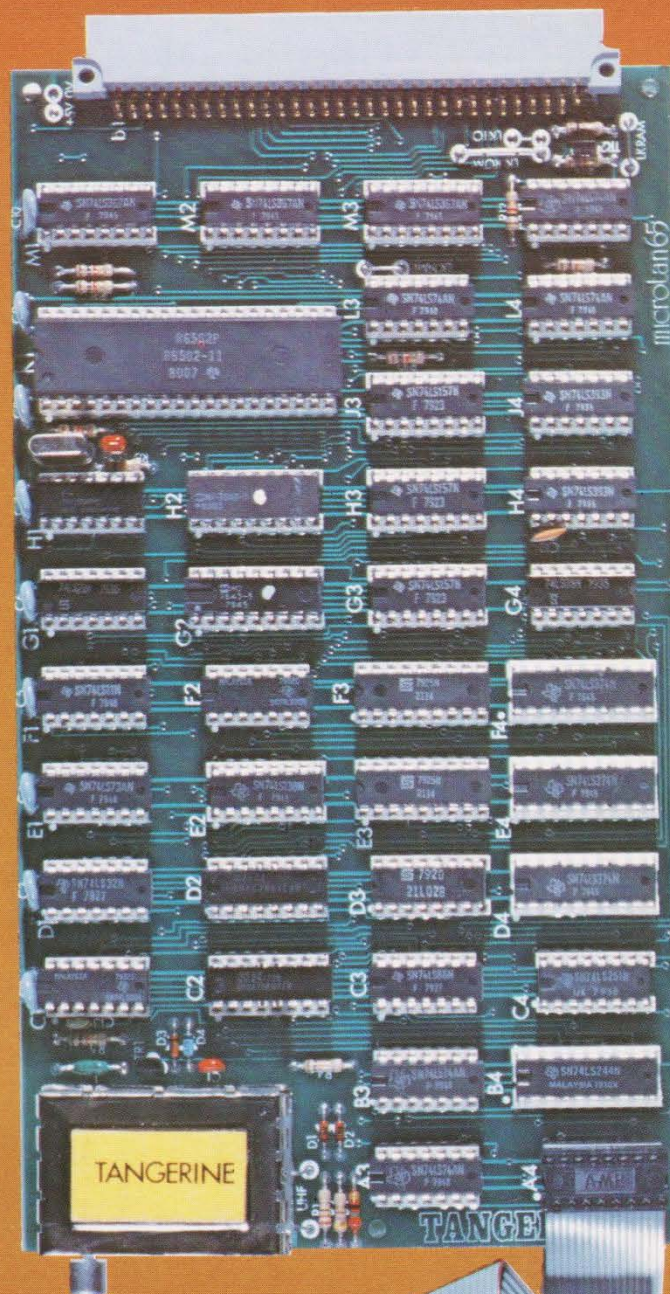

TANEX

- 7K RAM, 6K ROM
- 8K Microsoft basic in ROM
- 32 Parallel I/O lines
- 2 TTL serial I/O ports
- RS 232C 20mA loop with programmable baud rates
- Four 16 bit counter timers
- Cassette Recorder Interface
- Memory Mapping Control
- Full complement of IC sockets
- Data Bus Buffering

TANRAM

- 7K Static RAM
- 32K Dynamic RAM
- Onboard refresh totally transparent to cpu operation
- Fully expands available address space of the 6502 microprocessor



TANGERINE COMPUTER SYSTEMS

FORHILL FLY CAMBS. Tel: (0353) 3633

between the ground line and the emitter of Q4, you should hear a loud sound when the microphone is tapped or blown against. The remainder of the circuit may then be constructed.

For final testing and setting of the circuit, connect the reset pin to the 5 V supply and use a screwdriver for adjusting the setting of RV1. If RV1 is turned fully anticlockwise, D1 should come on, and stay on, even when an attempt is made to reset the circuit by momentarily disconnecting the reset pin from +5 V. When RV1 is turned fully clockwise, D1 remains permanently off. If either of these conditions is not met, the wiper of RV1 is obviously not able to tap at the correct voltage and the values of R6 and R7 should be altered accordingly. It is allowable to replace R6, RV1 and R7 with a single variable resistor, value 4k7, and one is then certain to find the trigger-point somewhere along its length, but to use a single variable resistor makes the precise setting of the circuit rather more difficult. Assuming that the circuit behaves as described, the next step is to find the setting at which it is just not triggered. Turn RV1 fully clockwise and reset if necessary. Then slowly turn it anticlockwise, whistling or snapping your fingers as you do so. When D1 comes on, try resetting. If the circuit can be reset, the correct position has been found. If not, turn RV1 back a few degrees and try again, turning it only a degree or so at each step. Finding the right position means getting to within a degree of the correct position but, once there, the job is done for good. The circuit should respond instantly to a wide variety of noises at distances up to several metres. It is particularly sensitive to noises with a high-frequency component, such as whistles, squeaks and claps.

Connections To The Microprocessor System

If you use the same socket as was used for joining the LED interface to Acorn, there is no need for modification. Plug it

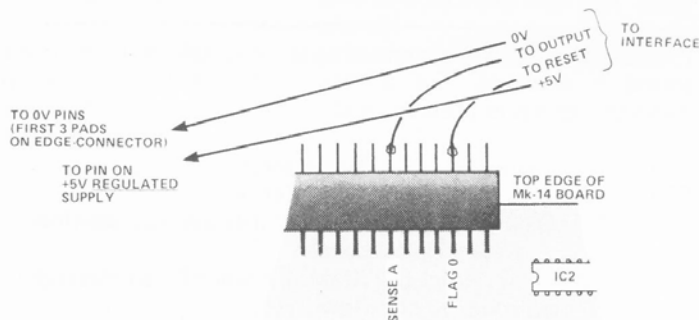


Fig.3. Connections to the Mk-14 main board.

in the correct way round so that the +5 V terminal goes to the top pin and ground to the bottom pin. With this arrangement, the output from the interface goes to Port B0, and the reset function is under the control of Port B2. With Mk-14, you will need to make a new connecting link, or modify the one used for the LED interface. The connections required are Flag 0 to Reset, and SENSE A to Output (Fig.3). It is also possible to operate the device through the I/O device of Mk-14, using a different program.

Operation

The flowchart for the simplest possible program is shown in Fig.4. As a practical example, Program A shows how the 'appropriate action' can be the display of a message when a

sound has been detected. Program B carries things still further and allows a sequence of messages to be displayed, — a new message each time a sound is detected. With this program you will find the Mk-14 to be friendly at first, but to

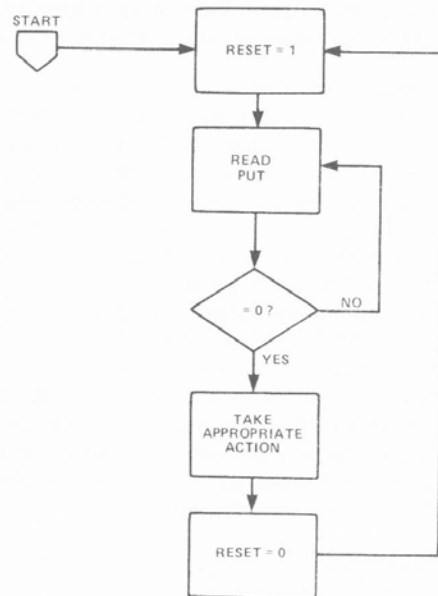


Fig.4. Simple flowchart for the interface.

rapidly tire of your attention. If you persist in making noises at it, it will reply with a continuous sequence of hieroglyphics as it works through the unprogrammed sections of its memory, 8 bytes at a time.

Program C allows you to control a model train by blowing a whistle. By connecting relays to outputs B1, B3 and B4, as described in Part 1 of this series, you can arrange for the train to start, stop or change direction when the whistle is blown once, twice or three times. This and countless other remote-control applications can easily be arranged by various modifications of this program.

After detecting the first sound the input port is scanned a fixed number of times, the number of times being determined by the value assigned in the program to 'k'. If no further sound is detected by the time counter 'k' has been decremented to zero, the program goes on to activate the output port B1. If, during the scanning process, further sounds are detected, a second counter, 'c', is incremented. When 'k' scans are completed, the value of 'c' is used to determine the action to be taken. Note that the values of 'c' corresponding to 1, 2 and 3 (or more) sounds are 0, 1 and 2 respectively.

Those new to programming may find the subroutines of general application in other programs. The delay program sends the MPU to the WAIT routine in monitor several times, depending on the value loaded into Register Y. The whole process is then repeated the number of times set by the value loaded into Register X. With the values given, the program takes action about 5 seconds after the first sound has been detected. In other words, the scanning time is 5 seconds. This can be extended considerably by increasing the value loaded into Register X (and also Y). A longer delay time would allow you to program for an alarm to sound if baby cries more than twice in, say, 5 minutes. Thus the occasional cry would be ignored, but any serious trouble would activate the alarm. The interface has also several applications in intruder-detecting systems. On detecting a sound (or perhaps the second sound in a period of a few

minutes, to obviate spurious triggering) the system could turn on the radio for a while, or take some other action to suggest that someone is at home. If you have neither space nor the cash to keep a hungry Alsatian watchdog, program the system to switch on a tape-loop of the sound of a fiercely barking dog whenever a noise is detected.

More Light Sensor Programs

Program D registers and displays how many high inputs are received from the sensor during the period for which the program is run. Use it to count the number of persons entering a room, or the number of objects passing along a conveyor-belt. Program E is the sort of program that can tell when a car-park is full. It displays the total when this reaches a pre-set value. It could, of course, be easily modified to take other action at this stage. Programs F and G are lap-timers, based on the flow-chart of Fig.5. It responds to a low pulse from the sensor which occurs just as the model car (or full-size person) crosses the starting line. It then begins counting hundredths of a second. Counting begins at the instant the light beam is broken and, even if the car is not clear of the beam during the first few hundredths of a second, counting is not interrupted.

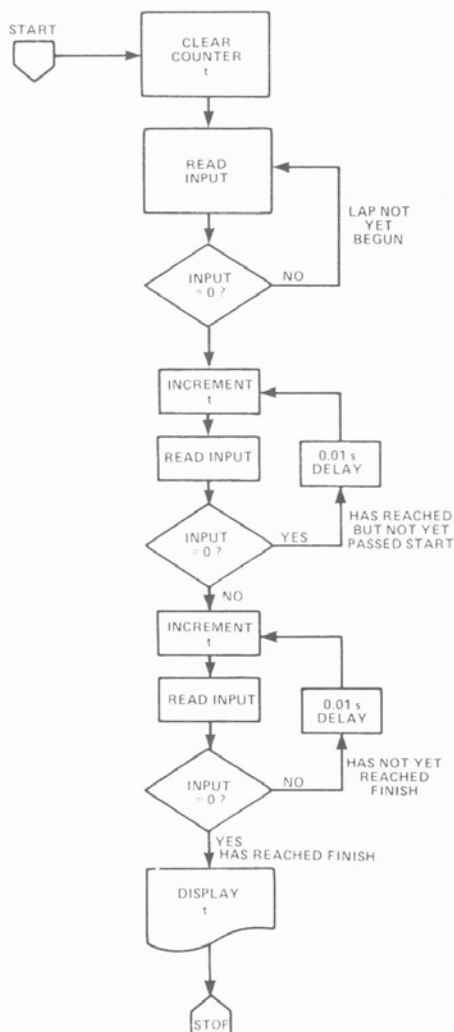


Fig.5. Flowchart for program F.

Counting continues until the instant that the light-beam is broken at the completion of the lap. Both programs are adaptable to allow the start and finish to be monitored

by separate sensors, so allowing you to time distances other than a complete lap. The rate of operation may need adjusting if crystals operating at other frequencies are used. Program F contains values suited to a 4.433 MHz crystal. It is a simple matter to run the program for a known period of, say, 30 seconds as measured by an accurate watch and adjust the timing values accordingly. In Program F, these are in 0F32 and 0F48 (and must both be equal); in Program G these are in 0044 and 0054.

Program A: Displays a message when a sound is detected. For 6502 in Acorn (relocatable if message address in program is altered).

0030	A9	FE		LDA#FE (1111 1110)
0032	8D	23	09	STA at 0DB, B0 as input, B2 as output.
0035	8D	0A	09	STA clear B2, to reset interface
0038	A0	10		LDY#10
003A	20	CD	FE	A : JSR WAIT delay to
003D	88			DEY counting allow reset
				down. to take
003E	10	FA		BPL to A if Y effect.
				not zero.
0040	8D	1A	09	STA set B2, reset high to let
				interface run
0043	2C	08	09	B : BIT read input
0046	30	FB		BMI to B if input high (no
				sound)
0048	A2	07		LDX#07
004A	B5	54		C : LDA Z X54 display
004C	95	10		STA Z 10 message
004E	CA			DEX
004F	10	F9		BPL to C
0051	4C	04	FF	JMP to RESTART in monitor
0054	7C	79	00 67	message
0058	1C	05	79 78	

Program B: Displays a new message, in sequence, each time a sound is detected. For SC/MP in Mk-14 (relocatable, if message address in program is altered).

0F1E				= counter, c
0F1F				= counter, k
0F20	C4	60		A : LDI '60' message address (low
				byte).
0F22	32			XPAL P2 point P2 to message
				(low byte).
0F23	C4	D0		B : LDI 'D0'
0F25	C8	F8		ST at c, set counter to X'D0
0F27	C4	0D		C : LDI '0D'
0F29	35			XPAH P1 point P1 to
0F2A	C4	00		LDI '00' display
0F2C	31			XPAL P1
0F2D	07			CAS clear Flag 0, to reset
				interface (00 in AC)
0F2E	C4	0F		LDI '0F' point P2 to
0F30	36			XPAH P2 message
				(high byte)
0F31	C4	01		LDI '01'
0F33	07			CAS set flag 0, to let interface
				run.
0F34	06			D : CSA read input
0F35	D4	10		ANI '10' to zero all except
				SENSE A digit.
0F37	9C	FB		JNZ to D, in input high (no


```

0F39 C4 08   E : LDI '08'          set counter
0F3B C8 E3   ST at k              to X'08
0F3D C6 01   F : LD @ P2 + 1 load message
                                character.
0F3F CD 01   ST @ P1 + 1 store in display
                                register.
0F41 8F 01   DLY
0F43 B8 DB   DLD k, counting down
0F45 9C F6   JNZ, to F to fetch next
                                character.
0F47 C6 F8   LD @ P2 - 8         restore
0F49 C5 F8   LD @ P1 - 8         pointers
0F4B B8 D2   DLD c, counting down
0F4D 9C EA   JNZ to E to repeat display
                                routine.
0F4F 90 D1   JMP to B, to prepare for next
                                sound.

0F60 00 00 3F 38 38 79 76 00   first
0F68 78 79 05 1C 67 00 79 7C   3
0F70 78 06 00 73 3F 78 6D 00   messages

```

Program C: Sets any one of three output ports to energise a relay (etc) depending on whether a whistle (etc) is blown 1, 2 or 3 times. For 6502, in Acorn (not relocatable).

```

0030 A9 FE   LDA# FE (1111 1110)
0032 8D 23 09 STA at 0DB, B0 as input, B1,
                                B2, B3, B4 as output
0035 A9 00   LDA# 00
0037 8D 21 09 STA at Port B; clear all outputs
003A A9 80   A : LDA# 80          store number
003C 85 20   STA Z 20            of scans at
                                0020 (=k)
003E 20 90 00 JSR to RESET
0041 2C 08 09 B : BIT read input
0044 30 FB   BMI to B, if input high (no
                                sound).
0046 20 90 00 JSR sound detected, so go to
                                RESET.
0049 A9 00   LDA# 00          clear counter
004B 85 21   STA Z 21          at 0021 (=c)
004D C6 20   C : DEC Z 20      decrement k
004F A5 20   LDA Z 20
0051 F0 10   BEQ to E, if k = 0 (scanning
                                complete).
0053 2C 08 09 BIT read input
0056 30 05   BMI to D, if input high (no
                                further sound).
0058 20 90 00 JSR to RESET, because further
                                sound detected.
005B E6 21   INC Z 21 increment c, counting
                                sounds.
005D 20 80 00 D : JSR to DELAY before scanning
                                again.
0060 4C 4D 00 JMP to C, to sample again
0063 A5 21   E : LDA Z 21 (c, final value)
0065 F0 09   BEQ to F if c = 0 (one sound
                                only).
0067 49 01   EOR# 01 to test for c = 1
0069 F0 0A   BEQ to G, if c = 1 (two sounds)
006B A9 14   LDA# 14 (0001 0100) ports B2
                                and B4 (3 or more sounds).
006D 4C 77 00 JMP to H, to activate outputs
0070 A9 06   LDA# 06 (0000 0110) ports B1
                                and B2.

```

```

0072 4C 77 00 JMP to H, to activate outputs
0075 A9 0C   LDA# 0C (0000 1100) ports B2
                                and B3.
0077 8D 21 09 STA at Port B, activate outputs
007A 4C 3A 00 JMP to A to await next
                                command.

```

Subroutine DELAY

```

0080 A2 01   X : LDX# 01
0082 A0 05   Y : LDY# 05
0084 20 CD FE Z : JSR to WAIT (in monitor)
0087 88       DEY
0088 10 FA   BPL to Z
008A CA       DEX
008B 10 F5   BPL to Y
008D 60       RTS

```

Subroutine RESET

```

0090 8D 0A 09 STA clear B2 to reset interface
0093 20 80 00 JSR to DELAY, allowing reset
                                to take effect
0096 8D 1A 09 STA set B2, to let interface run
0099 20 80 00 JSR to DELAY, to allow
                                activation of interface
009C 60       RTS

```

Program D: Counts high pulses from light sensor. For SC/MP (relocatable) Press and hold Key 0 to read count; release key to begin next count.

```

0F20 C4 01   A : LDI '01'          P3 pointed
0F22 37       XPAH P3            to 'Address
0F23 C4 59   LDI '59'            to segments'
0F25 33       XPAL P3            subroutine,
0F26 C4 00   LDI '00'            in monitor
                                (015A - 1)
0F28 CA 0E   ST P2+0E (ADH) Clears address
0F2A CA 0C   ST P2+0C (ADL) stores, which
                                are also acting
                                as counters.
0F2C A9 00   B : ILD P1 + 00 To detect if Key 0
                                pressed.
0F2E 9C 02   JNZ to C, if key pressed
0F30 90 05   JMP to D, if key not pressed
0F32 3F       C : XPPC P3 go to display total
                                count.
0F33 90 FD   JMP to C, illegal return from
                                display routine.
0F35 90 E9   JMP to A, returning from
                                display, start again.
0F37 06       D : CSA to detect high input
0F38 D4 10   ANI '10' all digits except SENSE
                                A become zero.
0F3A 98 F0   JZ to B if input is low
0F3C 02       CCL
0F3D C4 01   LDI '01'
0F3F EA 0C   DAD P2+0C          incrementing
0F41 CA 0C   ST P2+0C          counter, low
                                byte.
0F43 C4 00   LDI '00'
0F45 EA 0E   DAD P2+0E          adding carry,
0F47 CA 0E   ST P2+0E          if any, to
                                high byte

```

```

0F49 06      E : CSA
0F4A D4 10   ANI '10' all digits except SENSE
              A become zero.
0F4C 9C FB   JNZ to E if input still high
0F4E 90 DC   JMP to B, pulse is finished
0F50         = 0FF9
0FF9 0D 00   P1 points to keyboard/display
0FFB 0F 00   P2 points to RAM
  
```

Program E: Counts high pulses from light sensor and displays total when it reaches a pre-set value. Enter preset value in 0022 (thousands and hundreds) and 0023 (tens and units). For 6502, in Acorn (relocatable).

```

0030 A9 FE   LDA# FE (1111 1110)
0032 8D 23 09 STA at 0DB making port B0 an
              input.
0035 A9 00   LDA# 00
0037 85 20   ST Z 20          clear registers
0039 85 21   ST Z 20          for count
003B A2 20   LDX# 20, to provide for display
              of 0020 and 0021.
003D F8     SED
003E 2C 08 09 A : BIT read input
0041 10 FB   BPL to A, if input low
0043 38     SEC
0044 A9 00   LDA# 00
0046 65 20   ADC Z 20, adds 1 to 0020
0048 85 20   STA Z 20, store new 0020
004A A9 00   LDA# 00
004C 65 21   ADC Z 21, adds carry, if any, to
              0021.
004E 85 21   STA Z 21, store new 0021
0050 2C 08 09 B : BIT read input
0053 30 FB   BMI to B, if input still high
0055 A5 20   LDA Z 20      compare tens and
0057 45 23   EOR Z 20      units of count with
              tens and units of
              preset value.
0059 D0 E3   BNE to A if unequal, to await
              next pulse.
005B A5 21   LDA Z 21      compare hundreds
005D 45 22   EOR Z 22      and thousands
005F D0 DD   BNE to A if unequal, to await
              next pulse.
0061 20 64 FF JSR to QHEXT 1 to display
              0020 and 0021.
0064 4C 04 FF JMP to RESTART in monitor
  
```

Program F: Lap timer. Controlled by light sensor. Gives time in hundredths of a second. Press ABORT, GO, 0F20 to begin again. For SC/MP (relocatable).

```

0F20 — 0F2B as in Program D, above
0F2C 06      B : CSA
0F2D D4 10   ANI '10' all digits except SENSE
              A becomes zero.
0F2F 9C FB   JNZ to B, if input not low (not
              yet started lap).
0F31 C4 70   C : LDI '70'          delay 0.01 s
0F33 8F 15   DLY
0F35 02     CCL
0F36 C4 01   LDI '01'
0F38 EA 0C   DAD P2+0C          Increment
0F3A CA 0C   ST P2+0C          counter at
  
```

```

0F3C C4 00
0F3E EA 0E
0F40 CA 0E
0F42 06
0F43 D4 10
0F45 98 EA
  
```

```

0F47 C4 70
0F49 8F 15
0F4B 02
0F4C C4 01
0F4E EA 0C
0F50 CA 0C
0F54 EA 0E
0F56 CA 0E
0F58 06
0F59 D4 10
0F5B 9C EA
0F5D 3F
0F5E
0FFB 0F 00
  
```

For measured distance timing, use second sensor at finish, input to SENSE B, and alter 0F59 to D4 20.

Program G: Lap timer. Controlled by light sensor. Gives time in hundredths of a second. Press G, to begin again. For 6502 in Acorn (relocatable, if subroutine address at 004B and 005B altered).

```

0030 — 0040, as in Program E
0041 30 FB   BMI to A, if input high (not
              started yet).
0043 A0 02   B : LDY# 02
0045 20 CD FE C : JSR WAIT          delay 0.01 s
0048 88     DEY
0049 10 FA   BPL to C
004B 20 69 00 JSR to F to register a count
004E 2C 08 09 BIT read input
0051 10 F0   BPL to B, if input low (still
              passing start).
0053 A0 02   D : LDY# 02
0055 20 CD FE E : JSR WAIT          delay 0.01 s
0058 88     DEY
0059 10 FA   BPL to E
005B 20 69 00 JSR to F to register a count
005E 2C 08 09 BIT read input
0061 30 F0   BMI to D if input high (not yet
              finishing).
0063 20 64 FE JSR QHEXT D1 display total
              count (= time).
0066 4C 04 FF JSR RESTART
0069 38     SEC
006A A9 00   F : LDA# 00          subroutine
006C 65 20   ADC Z 20          for
006E 85 20   STA Z 20          incrementing
0070 A9 00   LDA# 00          counter in
0072 65 21   ADC Z 21          0020 and
0074 85 21   STA Z 21          0021.
0076 60     RTS
  
```

For measured distance timing, use second sensor at finish, input to B1, and alter 005F to 09.

computing today



WHAT TO LOOK FOR IN THE
JUNE ISSUE, ON SALE MAY 9TH

LIVERPOOL
FOR THE CUP



How'd
I GET HERE?

DISLEXIA
RULES
NO?

Another Brick In the Wall?

Why is this written on a wall?
Did it have to be so tall?
Read our next issue and find out.

The Ultimate Systems Review

Never in the field of Personal Computing have so many systems come under the microscope in a single month. We shall be featuring at least six machines in a wide variety of categories from small business, through scientific down to low cost single boarders. Without giving it all away we will be following up on the HP85 in greater detail and also poking around in a newly launched system that is threatening to take the world by storm. After all, if we told you everything you wouldn't want to buy the next issue!

I.G
J.H

ALL QUIET ON THE PICKET LINE

Do you fancy taking over from your boss for the day? Would you like to find out how well your firm could survive a strike? In our usual crusading style CT brings you "Shop Steward", possibly the ultimate simulation program.

Can you survive the threatened strike, will New Technology cause redundancies, will.....



CAPTAIN KIRK MEETS THE CURSOR

IF YOUR GRAPHICS GAMES LACK ZEST THEN YOU SHOULD PLACE AN INSTANT ORDER FOR OUR NEXT ISSUE BECAUSE WE SHOW YOU ALL THE TRICKS THAT REALLY MAKE A GAME GO LIKE ANY ENTERPRISING PROGRAMMER WANTS.



Articles mentioned herein are in an advanced state of preparation, however, circumstances may dictate changes to the final contents.



MODMAGS
ROOLS
OK?

MAKE WAR
NOT LOVE!

YAMAHHA - FROM THE PEOPLE THAT BROUGHT YOU PEARL HARBOUR

TELETEXT COLOUR

VDU BOARD FOR
NASCOM 1 & 2

At last you can develop exciting colourful applications on your NASCOM

- Bring Computer Games to life.
- Display your Data in **Colour Graphics** form.
- Take your first step to a colour **Viewdata** Terminal

JUST SOME OF ITS FEATURES INCLUDE

- 13 Colours
 - Full Viewdata/Teletext Character Set
 - Alphanumerics and Graphics (5760 PELs)
 - Flashing Characters
 - Single or double height characters
 - Plugs directly into NASBUS (No need to butcher your NASCOM!)
 - On board PAL Modulator for direct connection to Colour TV aerial socket
- Fully **ASSEMBLED AND TESTED**

£136 PLUS VAT

Money back Guarantee

ORDERS OR FULL DETAILS FROM

Winchester Technology Ltd.


PO Box 26, Eastleigh, Hants. SO5 5YY
Tel: 04215 66916

a digitizer adds another dimension

The Bit Pad computer digitizer converts graphic information into digital form for direct entry into a computer. By touching a pen like stylus or a cursor, to any position on a drawing, diagram, photograph, or other graphic presentation, the position co-ordinates are converted to digital equivalents.

- Bit Pad interfaces with almost any micro computer.
- Bit Pad consists of a 15" sq. digitizer tablet (11" sq. active area), a stylus, and a controller cabinet.
- Bit Pad costs only **£532 (inc RS232)** excluding VAT

Radiology Microscopy Artwork
Structural Civil Mechanical
Process Control Graphic
Teaching Games Operat
Measuring Biology M
Menus Market rese
Cartographic Arch
Geology Physics



Fill in the Coupon and we will send you full information and details.

Terminal Display Systems Ltd.,
Hillside, Whitebirk Industrial Estate,
Blackburn BB1 5SM, Lancs, England.

Send to: Department CTS580 Terminal Display Systems Ltd., Hillside, Whitebirk Industrial Estate, Blackburn BB1 5SM, Lancs, England.

Name

Address


Your key. To MICROCOMPUTERS

This coupon will bring you details of our new complete home computer course.

You will learn all the basic principles of computer technology and receive full instruction on computer functions and programming. Tuition is carried out at your own pace on your own home computer and is supervised by our qualified computer staff.

**FREE
BROCHURES**

Send today for a brochure on this exciting new course.



TUTORCOURSE
HOME COMPUTER

Please rush me details of your HOME COMPUTER COURSE

Name

Address

CTS/5

Block Caps. Please

Post now, without obligation to:

**British National Radio
& Electronics School.**

P.O.Box 156, Jersey, Channel Isles

E PROMS

Surplus to requirements,
2708
4716

**£6.00
£25.00 each**

Parts sent by return
Programming Service if required
Please add V.A.T. (15%) and 30p P & P

BARINGLOCK LTD

31 ASHDOWN AVENUE,
SALTDEAN,
BRIGHTON. BN2 8AH.
Tel. 01 686 1922

FREE - ADVICE/DEMO/COFFEE

PET NEW KEYBOARD from	£550
COMPUKIT UK101 KIT	£228.85
UK101 BUILT	£286.35
SUPERBOARD II	£172.45
STYLISH CASE - UK101/S. BOARD	£33.80
TRS 80 16K LEVEL II	£440.00
5 1/4 DISC DRIVE for TRS80	£287.50
H 14 LINE PRINTER KIT	£410.00
BUILT	£586.50
NASCOM 2 KIT	£339.25
BUILT	£420.00
EXIDY SORCERER 16/32/48K from	£860

ALL OUR PRICES
INC.

COMPUTER BOOKS - SOFTWARE




N.I.C.

61 Broad Lane, London. N15 4DJ
Day 01-808 0377 Ev. 01-889 9736

SAE Enquiries



nascom-2



nascom-1

video display and EPROM option socket, leaving a 1K user RAM. The MPU is the standard Z80 which is capable of executing 158 instructions including all 8080 code.

Built price
£140 + VAT.

NASCOM-1
£125 + VAT
+P&P £1.50

£125 +VAT
+P&P
£1.50

HARDWARE ● Industrial standard 12" x 8" PCB, through hole plated, masked and screen printed. All bus lines are fully buffered on-board.
INTERFACES ● Licon 57 key solid state keyboard
● Monitor/domestic TV interface ● Kansas City cassette interface (300/1200 baud) or RS232/20mA teletype interface.
The Nascom 2 kit is supplied complete with construction article and extensive software manual for the monitor and BASIC.


**REVOLUTIONARY TOUCH
ACTIVATED KEYBOARD
TASA MODEL 55**



Other features include:

- Built-in electronic shift lock.
- Two-key rollover to prevent accidental two-key operation (excluding "control" and "shift").
- Electronic hysteresis for firm "feel".
- Signal activation time of 1 millisecond.
- Output via 12-way edge connector.
- CMOS compatible with pull-up resistor.
- Parallel output: active pull-down, direct TTL compatible (one load) open collector type.

THE MOST FLEXIBLE SYSTEM EVER!

SYSTEM
80

* Available in kit form.
All prices subject to VAT.



NEW

Double sided, double density 5 $\frac{1}{4}$ in disc giving 280K bytes formatted, including controller board/PSU/Housing and interconnects £460
Controller board £127.50 • Second Disc £240
GP/M £80



Microprocessor board* (Nascom 2)
4MHz Z80 CPU, TV or Video + 1200 baud
Kansas City - Serial RS 232 printer
Interfaces: Keyboard, 128 character ASCII
plus 128 Graphics in 2 x 2K ROM; free
16-way parallel port, 8K BASIC, NAS SYS
operating monitor. £280 built and tested.

Firmware & MOSICS
Zeap Assembler (4, 1Kx8 EPROMS) £50
NAS Pen text editor (2, 1Kx8 EPROMS) £30
NAS-DIS disassembler (3, 1Kx8 EPROMS)
£37.50 + 2708 £9.50 + 2716 £26
MC 4118N4 £12.75 + MC 4116N4 £55 for 8

NASCOM FIRMWARE IN EPROM

NASPEN: £25.00 + VAT + 30p P + P
ZEAP 2: £50.00 + VAT + 30p P + P
NAS-SYS 1: £25.00 + VAT + 30p P + P

NASCOM SOFTWARE ON TAPE

8K BASIC:£15.00 + VAT
ZEAP 1:£30.00 + VAT + 50p P + P
ZEAP 2:£30.00 + VAT + 50p P + P

NASCOM HARDWARE

Motherboard: £5.50 + VAT + 50p P + P
Mini Motherboard: £2.90 + VAT + 50p P + P

NASCOM IMP PLAIN PAPER PRINTER



MICRO MART

IC SOCKETS	
8 pin	10p each
14 pin	12p each
16 pin	13p each
20 pin	25p each
24 pin	30p each
28 pin	35p each
40 pin	40p each
ICs	
EPROMs 2708	£9.00 each
EPROMs 2716	£26.00 each
MEMORIES	
21L02	£0.80 each
4027	£2.75 each
4116	£7.50 each
2114	£4.00 each
Z80 DEVICES	
MK3880	£12.50 each
MK3881 (PiO)	£7.50 each
MK3882 (C/T)	£7.50 each
VOLTAGE REGULATOR	
SPECIAL OFFER	
LM309K	90p each
Add VAT and 30p P&P to all orders	

VISIT OUR NEW SHOP

We stock PET, TRS 80, Sharp MZ-80K, Atari TV games and extensive range of electronic components including ICs, discrete semiconductors, capacitors, resistors, VERO products, tools and accessories for both professional and amateur constructors.

ORDER FORM

Send your orders to:
Interface Components Ltd, Oakfield Corner,
Sycamore Road, Amersham, Bucks HP6 6SU.
Tel: 02403 22307. Telex: 837788.

CT/5/80

Description	Quantity	Price
	+ VAT at 15%	
	+ P + P	
	Total enclosed	

Name _____

Address

Access/
Barclaycard No:

*Cheques & P/Os made payable to Interface Components Ltd.

Dear Sir,

NASCOM 2 Review

I was interested to read your review of operating the NASCOM 2. I have just built one of the first ones to be sold and I thought you might be interested in my comments. I would like to say that overall, in spite of the problems I have had, I am glad I waited for and bought this machine, which is good value for money.

I have found NASCOM willing to replace faulty parts free of charge, fairly rapidly (in one case in one week — not bad for 4,000 miles, there and back, Nairobi — Chesham).

I constructed the main board and the 16K memory with few problems — A dead short on the 16K due to my poor soldering, difficulty in locating parts on the main board, as they were numbered, relative to function, rather than position on the board.

When I inserted the ICs according to instructions I could not get the video to work at all. Detective work with an oscilloscope showed the video PROM u/s. NASCOM replaced this after a short wait, and again — problems. This time the Memory Decode PROM was at fault.

When this was replaced the Monitor worked, but no BASIC — the fault was eventually traced to a broken track on the Veroboard "mother board" — my fault, due to overtightening a mounting screw. The 16K board was OK.

Correcting this, and my NASCOM worked! (almost) I got only 36 characters across the screen instead of 48.

Never mind — I could write BASIC programs that worked!

A week later I sit and look at a screen full of junk — the I/O PROM seems to have died, and today I sent it for replacement. In trying to trace this fault, I think I have found a cure for the 36 character VDU, which may affect other NASCOMs. A 100p capacitor, between IC60/5 and earth, works. I guess it might be IC60/1 on other machines. It can be done neatly to the right of IC4a where the track from IC60/5 goes to IC55/8. I also had to put a 120p on IC65 as per your review.

I am hoping that the DB PROM is not also about to die on me! Perhaps NASCOM have got a bad supply of PROMs, or maybe I was unlucky?

In spite of the above, I would wholeheartedly recommend construction to anyone with a small amount of experience in electronics, providing they can solder and have a 1mm bit on their iron, and providing they can get hold of a 'scope when things go wrong; and can use it to trace a digital signal. I would have been tempted to return the kit a couple of times when I despaired of getting it working had I lived a bit nearer Chesham. But I persevered and learnt a lot about using an oscilloscope, and about digital electronics and how the NASCOM works.

In conclusion can I ask two questions:

1. How do you CSAVE string arrays other than by using ASC to turn them into numeric arrays first. Maybe they can be POKED into DATA statements and become part of the Program?
2. Are there any other NASCOM owners, or computer enthusiasts in Kenya? If so you could contact me at Box 50973 Nairobi; or phone 568431.

Yours etc.

David R. Green.

P.O.Box 50973,
Wood Avenue,
Nairobi, Kenya.

Dear Sir,

Some comments on the Birthday Competition

For me, a life-long held ambition,
To win some birthday competition,
Could be very close today,
If there be truth in what I say.

I bought a copy of CT
And thought this is the one for me,
But however hard I fought with it
I couldn't get the words to fit.

It seems your man's been on the booze
And cannot add up all the clues,
While eight five-lettered words is fine
Five-lettered clues add up to nine.

Perhaps I'm being too unfair
And with his characteristic flair
He said "I think that we will make
Just one deliberate mistake".

'Send in panic' — not sent was I,
To find the error I did try.
The answer had just letters four,
While your man thought one letter more.

And now I hope I'm not too late —
No mention of your closing date!!
For daylight I at last have seen
The number is three seventeen.

My entry is, of course, under separate cover.
E.L. Foster.

14 The Grove,
Hutton Gate,
Guisborough,
Cleveland.

Dear Sir,

A few months ago, your magazine reviewed the 'TOOLKIT' for the PET. I, like thousands of PET users, have one of these.

One feature of the 'Toolkit' is the automatic line numbering. In the SOFTSPOTS in Computing Today the programs are nearly always excellent, but one irritating problem is the line numbers are never all constant, that is, not one large program has gone up in, say, tens all the way through the program.

This problem is also present when I use larger computers with automatic line numbering facilities. It is awkward, pointless and generally time-wasting to go up in tens, then fives, ones, threes etc.

Please bear this in mind, programmers for CT, and I am sure 'TOOLKIT' users would be very grateful.

Yours faithfully,
Glenn Beard (13).

25 Maesygwernen Drive,
Cwmrhydyceirw,
Swansea,
W.Glam, S.Wales.
SA6 6LN.

Dear Sir,

We really must take you to task for what is almost certainly the most ridiculous piece of software silliness in print.

We refer, of course, to Elaine Douse's Home Finance program for the PET; in the March issue. The program itself was a very creative solution to a mundane problem — however what was not good was the inclusion of a 'password' in it.

Aside from the fact that the very necessity of having a password is questionable, all that on an unauthorised user has to do is press stop, and type 'LIST' to find it out.

The most effective security, is of course to simply lock away your data tapes the way you would with an account book.

If you insist on having passwords, at least disable the interrupt's first (OLDROMs "POKE 537,136", NEWROMs "POKE 144,49") although this isn't really secure. (A small prize if you can figure out why). This disables the 'STOP' key.

Yours superfluously,
Nigel Roberts & Roy Trubshaw.
(Essex University)

P.O. Box 49,
Colchester.

Dear Sir,

You must by now realise that your Birthday Competition Crossword is impossible. There are too many 5 letter words and not enough 4 letter words. I could present you with the 4 letter word I uttered when I discovered this. Unfortunately it does not fit either.

Yours faithfully,
W.N. Bainbridge.

Staddle Stores,
Overthorpe,
Nr. Banbury,
Oxon.

Dear Sir,

NASCOM 1 ; LOSS OF CURSOR

You have, over the past couple of years published several letters relating to the cure of bugs on NASCOM 1 machines. These items would have been of help particularly for those trying to fault find on a freshly built kit using limited equipment.

During tracing a fault on my own machine I came across a failure which may be of general interest. The problem shows itself by the machine completing the test schedule up to and including clearing the screen after power up. The cursor does not appear at this point. Use of reasonable combinations of new line, space and printing characters does not cause the cursor, nor indeed any other character to appear.

The cause in my case was a two fold problem. The TV set caused the cursor to appear at the bottom left, off the screen, and therefore out of sight. Secondly the ribbon cable connection giving +5V to the keyboard was o/c such that the keyboard was powerless (?) to cause scrolling or printing of characters. The combination of these two faults caused a

Dear Sir,

I found the 'HOME ACCOUNTS' program by Elaine Douse in your March issue most useful.

Some sections of the program would not operate correctly at first, and I thought you might be interested in the additions/alterations I made.

1. Line 5190 space between months should be 2 (not 3)
Line 6100 should read the same as 6090
2. To overcome the mathematical 'problem' make the following additions
Line 16 DEF FNA(Z) = INT(Z*100 + .1)/100 and following each calculation (subtraction) add New variable = FNA (New variable) eg Line 2220 becomes
 $T(R) = T(R) - R1$; $T(R) = FNA(T(R))$; GOSUB 2900
3. Eliminate lines 5380, 5400, 5420, 6295, 6300 and 6310 and alter lines 5320 and 6260 to read
5320 IF I = N2 THEN POKE P + B, 102: GOTO 5340
6260 do. 6280
4. To overcome the tape recording/reading problems on the 8K I used the following patches
Line 5319 POKE 243, 122: POKE 244, 2
and following each PRINT# statement add GOSUB 900
" " " INPUT# " " GOSUB 950
eg line 9372 now reads PRINT#1, N1: GOSUB 900
" 9670 " " INPUT#1, CH: GOSUB 950

the necessary subroutines are
900 IF PEEK(625) < 180 THEN RETURN
901 POKE 59411, 53: T = T1
902 IF T1 - T < 6 THEN 902
903 POKE 59411, 61: RETURN
and
950 IF (ST) > 0 THEN CLOSE 1
951 RETURN

Compensation for the additional memory used can be achieved by eliminating spaces in instructions and by using multiple instruction lines.

Yours,
John E. Brennan.

2 Highfield Park,
Rathfadden,
Waterford, Eire.

continuously blank screen despite manual keyboard activity. Use of a colour set precluded the easy adjustment of the display.

Careful soldering of all the joints at both ends of the ribbon cable cured the problem and safeguarded against future problems. Characters immediately after the cursor were sufficiently visible on the TV to unambiguously view the characters.

As a note of caution, delving into the monitor, oscilloscope probing of the power supply, examining for bent IC pins (an illuminating pocket microscope is useful here) and searching for solder bridges and shorts were some of the blind alleys explored prior to the true cause being spotted.

Incidentally I have had good service on missing parts from NASCOM after only a moderate amount of pushing.
C.E. Fernando.

10 Richmond Lane,
Romsey,
Hants SO5 8LA.

INSTANT SOFTWARE



CT Software is a unique service that we offer to our readers. Each program comes on a high quality tape packaged with full documentation.

Read down the list of titles—you'll find a few surprises and some things for which you have offered sacrifices on a stone at dawn before now. All are checked and fully guaranteed, any complaints and we'll replace by return of post.

We think this is a revolution in reader service and one that will change the way you use your computer. So why not try us out?

All orders and enquiries to:— CT software
145 Charing Cross Road,
London WC2H 0EE.

All programs except 0013R are £6.75.

TRS 80 Level 1

BUSINESS PACKAGE I Keep the books for a small business with your TRS-80 Level I 4K. The six programs included are:

General Information — The instructions for using the package.

Fixed Asset Control — This will give you a list of your fixed assets and term depreciation.

Detail Input — This program lets you create and record your general ledger on tape for fast access.

Month and Year to Date Merge — This program will take your monthly ledger data and give you a year to date ledger.

Profit and Loss — With this program you can quickly get trial balance and profit and loss statements.

Year End Balance — This program will combine all your data from the profit and loss statements into a year end balance sheet. With this package, you can make your TRS-80 a working partner.

Order Code. 0017R

PERSONAL FINANCE I Let your TRS-80 handle all the tedious details the next time you figure your finances:

Personal Finance I — With this program you can control your incoming and outgoing expenses.

Checkbook — Your TRS-80 can balance your checkbook and keep a detailed list of expenses for tax time.

This handy financial control package for the home requires only a TRS-80 Level I 4K. Order No. 0027R 5.75.

Level 1&2

AIR FLIGHT SIMULATION Turn your TRS-80 into an airplane. You can practice takeoffs and landings with the benefit of full instrumentation. This one-player simulation requires a TRS-80 Level I 4K, Level II 16K. Order No. 0002R

SPACE TREK II Protect the quadrant from the invading Klingon warships. The Enterprise is equipped with phasers, photon torpedoes, impulse power, and warp drive. It's you alone and your TRS-80 Level I 4K, Level II 16K against the enemy. Order No. 0002R

SANTA PARAVIA AND FIUMACCIO Become the ruler of a medieval city-state as you struggle to create a kingdom. Up to six players can compete to see who will become the King or Queen first. This program requires a 16K TRS-80 Level I & II. Order No. 0043R

ELECTRONICS I This package will not only calculate the component values for you, but will also draw a schematic diagram, too. You'll need a TRS-80 Level I 4K, Level II 16K to use:

Tuned Circuits and Coil Winding — Design tuned circuits without resorting to cumbersome tables and calculations.

555 Timer Circuits — Quickly design astable or monostable timing circuits using this popular IC.

LM 381 Preamp Design — Design IC pre-

amps with this low-noise integrated circuit. This package will reduce your designing time and let you build those circuits fast. Order No. 0008R

HAM PACKAGE I This versatile package lets you solve many of the commonly encountered problems in electronics design. With your Level I 4K or Level II 16K TRS-80, you have a choice of:

Basic Electronics with Voltage Divider — Solve problems involving Ohm's Law, voltage dividers, and RC time constants.

Dipole and Yagi Antennas — Design antennas easily, without tedious calculations. This is the perfect package for any ham or technician. Order No. 0007R

Level 2

TRS-80 UTILITY I Ever wonder how some programmers give their programs that professional look? Instant Software has the answer with the TRS-80 Utility I package. Included are:

RENUM — Now you can easily renumber any Level II program to make room for modification, or to clean up the listing.

DUPLIK — This program will let you duplicate any BASIC, assembler, or machine-language program, verify the data, merge two or more programs into one data block, and even copy Level I programs on a Level II machine. For TRS-80 Level II 16K. Order No. 0081R

TRS-80 UTILITY 2 Let Instant Software change the drudgery of editing your programs

into a quick, easy job. Included in this package are:

CFETCH — Search through any Level II program tape and get the file names for all the programs. You can also merge BASIC programs, with consecutive line numbers, into one program.

CWRITE — Combine subroutines, that work in different memory locations into one program. This works with BASIC or machine-language programs and gives you a general checksum.

This package is just the thing for your TRS-80 Level II 16K. Order No. 0076R

SPACE TREK IV Trade or wage war on a planetary scale. This package includes:

Stellar Wars — Engage and destroy Tie fighters in your attack on the Death Star. For one player.

Population Simulation — A two-player game where you control the economy of two neighbouring planets.

You decide, guns or butter, with your TRS-80 Level II 16K. Order No. 0034R

RAMROM PATROL/TIE FIGHTER/KLINGON CAPTURE Buck Rogers never had it so good. Engage in extraterrestrial warfare with:

Ramrom Patrol — Destroy the Ramron ships before they capture you.

Tie Fighter — Destroy the enemy Tie fighters and become a hero of the rebellion.

Klingon Capture — You must capture the Klingon ship intact. It's you and your TRS-80 Level II 16K battling across the galaxy. Order No. 0028R

CARDS This one-player package will let you play cards with your TRS-80 — talk about a poker face!

Draw and Stud Poker — These two programs will keep your game sharp.

No-Trump Bridge — Play this popular game with your computer and develop your strategy.

This package's name says it all. Requires a TRS-80 Level II 16K. Order No. 0063R

HOUSEHOLD ACCOUNTANT Let your TRS-80 help you out with many of your daily household calculations. Save time and money with these fine programs:

Budget and Expense Analysis — You can change budgeting into a more pleasant job with this program. With nine sections for income and expenses and the option for one- and three-month review or year totals, you can see where your money is going.

Life Insurance Cost-Comparison — Compare the cost of various life insurance policies. Find out the difference in price between term and whole life. This program can store and display up to six different results.

Datebook — Record all those important dates in your life for fast, easy access. The program has all major holidays already included.

All you need is TRS-80 Level II 16K. Order No. 0069R

FINANCIAL ASSISTANT Compute the figures for a wide variety of business needs. Included are:

Depreciation — This program lets you figure depreciation on equipment in five different ways.

Loan Amortization Schedule — Merely enter a few essential factors, and your TRS-80 will display a complete breakdown of all costs and schedules of payment for any loan.

Financier — This program performs thirteen common financial calculations. Easily handles calculations on investments, depreciation, and loans.

1% Forecasting — Use this simple program

to forecast sales, expenses, or any other historical data series.

All you need is a TRS-80 Level II 16K. Order No. 0072R

PET

CASINO I These two programs are so good, you can use them to check out and debug your own gambling system!

Roulette — Pick your number and place your bet with the computer version of this casino game. For one player.

Blackjack — Try out this version of the popular card game before you go out and risk your money on your own "surefire" system. For one player.

This package requires a PET with 8K. Order No. 0014P

CASINO II This craps program is so good, it's the next best thing to being in Las Vegas or Atlantic City. It will not only play the game with you, but also will teach you how to play the odds and make the best bets. A one player game, it requires a PET 8K. Order No. 0015P

CHECKERS/BACCARAT Play two old favourites with your PET.

Checkers — Let your PET be your ever-ready opponent in this computer-based checkers program.

Baccarat — You have both Casino- and Blackjack-style games in this realistic program.

Your PET with 8K will offer challenging play anytime you want. Order No. 0022P

MIMIC Test your memory and reflexes with the five different versions of this game. You must match the sequence and location of signals displayed by your PET. This one-player program includes optional sound effects with the PET 8K. Order No. 0039P

TREK-X Command the Enterprise as you scour the quadrant for enemy warships. This package not only has superb graphics, but also includes programming for optional sound effects. A one-player game for the PET 8K. Order No. 0032P

TURF AND TARGET Whether on the field or in the air, you'll have fun with Turf and Target package. Included are:

Quarterback — You're the quarterback as you try to get the pigskin over the goal line. You can pass, punt, hand off, and see the results of your play using the PET's superb graphics.

Soccer II — Play the fast-action game of soccer with four playing options. The computer can play itself, play a single player, two players with computer assistance, and two players without help.

Shoot — You're the hunter as you try to shoot the bird out of the air. The PET will keep score.

Target — Use the numeric keypad to shoot your puck into the horn position as fast as you can.

To run and score all you'll need is a PET with 8K. Order No. 0097P

ARCADE I This package combines an exciting outdoors sport with one of America's most popular indoor sports:

Kite Fight — It's a national sport in India. After you and a friend have spent several hours manoeuvring your kites across the screen of your PET, you'll know why!

Pinball — By far the finest use of the PET's exceptional graphics capabilities we've

ever seen, and a heck of a lot of fun to play to boot.

Requires an 8K PET. Order No. 0074P

ARCADE II One challenging memory game and two fast-paced action games make this one package the whole family will enjoy for some time to come. Package includes:

UFO — Catch the elusive UFO before it hits the ground!

Hit — Better than a skeet shoot. The target remains stationary, but you're moving all over the place.

Blockade — A two-player game that combines strategy and fast reflexes.

Requires 8K PET. Order No. 0045P

DUNGEON OF DEATH Battle evil demons, cast magic spells, and accumulate great wealth as you search for the Holy Grail. You'll have to descend into the Dungeon of Death and grope through the suffocating darkness. If you survive, glory and treasure are yours. For the PET 8K. Order No. 0064P

Apple

MATH TUTOR I Parents, teachers, students, now you can turn your Apple computer into a mathematics tutor. Your children or students can begin to enjoy their math lessons with these programs:

Hanging — Perfect your skill with decimal numbers while you try to cheat the hangman.

Spellbinder — Cast spells against a competing magician as you practice working with fractions.

Whole Space — While you exercise your skill at using whole numbers your ship attacks the enemy planet and destroys alien spacecraft.

All programs have varying levels of difficulty. All you need is Applesoft II with your Apple II 24K. Order No. 0073A

MATH TUTOR II Your Apple computer can go beyond game playing and become a mathematics tutor for your children. Using the technique of immediate positive reinforcement, you can make math fun with:

Car Jump — Reinforce the concept of calculating area while having fun making your car jump over the ramps.

Robot Duel — Practice figuring volumes of various containers while your robot fights against the computer's mechanical man.

Sub Attack — Take the mystery out of working with percentages as your submarine sneaks into the harbor and destroys the enemy fleet.

All you need is Applesoft II with your Apple II and 20K. Order No. 0098A

GOLF Without leaving the comfort of your chair, you can enjoy a computerized 18 holes of golf with a complete choice of clubs and shooting angles. You need never cancel this game because of rain. One or two players can enjoy this game on the Apple with Applesoft II and 20K. Order No. 0018A

BOWLING/TRILOGY Enjoy two of America's favorite games transformed into programs for your Apple:

Bowling — Up to four players can bowl while the Apple sets up the pins and keeps score. Requires Applesoft II.

Trilogy — This program can be anything from a simple game of tic-tac-toe to an exercise in deductive logic. For one player.

This fun-filled package requires an Apple with 20K. Order No. 0040A

FREE
POWER
SUPPLY

NASCOM-2 MICRO-COMPUTER

FREE 16K
RAM Board

only £295

+ VAT

Z80A 8 bit. This will run at 4 Mhz but is selected between 1/2/4/Mhz.

On-board, addressable memory. 2K 2K Monitor — Nas-sys 1. 1K Video RAM (MK 4118). 1K work space/User RAM (MK 4118). 8K Microsoft Basic (MK 3600 ROM). 8K Static RAM/2708E Pr.

Microprocessors Z80A. 8 bit CPU. This will run at 4MHz but is selectable between 1/2/4 MHz. This CPU has now been generally accepted as the most powerful, 8 bit processor on the market.

INTERFACE

Keyboard New expanded 57 key Licon solid state keyboard especially built for Nascom. Uses standard Nascom, monitor controlled, decoding.

T.V. The lv peak to peak video signal can drive a monitor directly and is also fed to the on-board modulator to drive the domestic T.V.

I.O. On-board UART (Int. 6402) which provides serial handling for the on-board cassette interface or the RS232/20mA teletype interface.

The cassette interface is Kansas City standard at either 300 or 1200 baud. This is a link option on the NASCOM-2.

The RS232 and 20mA loop connector will interface directly into any standard teletype.

The input and output sides of the UART are independently switchable between any of the options —


i.e. it is possible to house input on the cassette and output on the printer.

PIO There is also a totally uncommitted Parallel I/O (MK 3881) giving 16, programmable, I/O lines. These are addressable as 2 x 8 bit ports with complete handshake controls.

Documentation Full construction article is provided for those who buy a kit and an extensive software manual is provided for the monitor and Basic.

Basic The Nascom 2 contains a full 8K Microsoft Basic in one Rom chip with additional features like DEEK, DOKE, SET RESET for simple programming.

SYSTEM KITS from £225

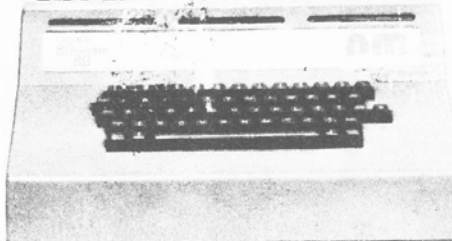

Microprocessor board* (Nascom 2)
4MHz Z80 CPU; TV or Video + 1200 baud Kansas City + Serial RS 232 printer Interfaces; Keyboard; 128 character ASCII plus 128 Graphics in 2 x 2K ROM; free 16-way parallel port; 8K BASIC; NAS SYS operating monitor. £280 built and tested.

Firmware & MOS ICs

Zeap Assembler (4, 1Kx8 EPROMS) £50
Nas Pen text editor (2, 1Kx8 EPROMS) £30

Floppy disc system

Double sided, double density 5 1/4 disc giving 280K bytes formatted, including controller board/PSU/Housing and interconnects £480.

Controller board £127.50 Second Disc £240.

CP/M £80

System 80 housing

High strength GRP moulding
Accepts 12x8 Nascom 2 CPU board, four 8x8 expansion boards. £85 incl. frame racking, interconnects and motherboard.

Expansion boards*

16K RAM £127.50 • 32K RAM £185.00

48K RAM £245.00

High Resolution Programmable Graphics £90

High Resolution Colour board £140 (kit).

* Available in kit form.

All prices subject to VAT.

No more slaving over a hot soldering iron the Nascom 1 is now supplied BUILT!
Britain's biggest small system is available fully constructed for you to slot into your own housing for the ridiculously low price of £140 plus VAT (kit price still only £125 plus VAT).

nascom-1


12" x 8" PCB carrying 5LSI MOS packages, 16 1K MOS memory packages and 33 TTL packages. There is on-board interface for UHF or unmodulated video and cassette or teletype. The 4K memory block is assigned to the operating system, video display and Eprom option socket, leaving a 1K user RAM.

The MPU is the standard Z80 which is capable of executing 158 instructions including all 8080 code.

NASCOM-1
£125
+ VAT
+ P&P
£1.50

NASCOM PRODUCT LIST + VAT

1061/O board kit less I/O chips	45.00
UART + BAUD rate generator + crystal for I/O board	16.00
CTC — MK3882 multiple interrupt driven clock generator for I/O board	8.25
P/I/O — MK3881 + interconnect for I/O board	8.50
P/I/O interconnect only (for I/O board)	3.80
Econographics kit for additional 128 characters (N1 only)	30.00
Conversion to high resolution colour graphics	37.50
Nascom 19" rack mounting card frame for N1 and N2	32.50
Nas-DA disassembler 3 EPROM for Nas-sys	37.50
MK36271 8K BASIC in 8K x 8 ROM	40.00
Naspen VT in 2 EPROM	30.00
Nas-sys monitor in 2 EPROM	25.00
Nasbug T2 1 x EPROM	12.50
Nasbug T4 2 x EPROM	25.00
Tiny Basic 2 x EPROM	25.00
Super Tiny Basic 3 x EPROM	37.50
Super Tiny Basic upgrade 1 x EPROM	12.50
Tape Software	
ZEAP 1.2 tape and documentation for N1	30.00
ZEAP 2 tape and documentation for Nas-sys	30.00
8K BASIC tape and documentation for N1	15.00
MEMORIES Discounts 10% for 4, 15% for 8, 20% for 16	
MK3880 (Z80) for N1	7.50
MK3880-N4 (Z80A) for N2	7.95
MK4116 16K x 1 dynamic RAM	7.50
MK4027 4K x 1 dynamic RAM	2.25
2102 1K x 1 static RAM	1.00
4118 1 K x 8 static RAM	12.75
Unprogrammed 2708	7.50
Unprogrammed 2716	19.95
IM6402 UART	4.50
2114 1K x 4 Static RAM	3.95
8080A	5.25

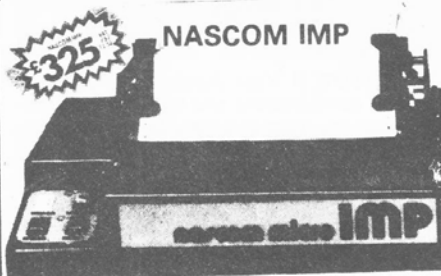

PLAIN PAPER PRINTER

Fully built and housed in a stylish enclosure for just £325 plus VAT. Interfaces with all micro computers

The Nascom IMP (Impact Matrix Printer) features are

- 60 lines per minute. • 80 characters per line.
- Bi-directional printing. • 10 line print buffer.
- Automatic CR/LF. • 96 character ASCII set (including upper/lower case, \$, #, £).
- Accepts 8 1/2" paper (pressure feed). • Accepts 9 1/2" paper (tractor feed).
- Tractor/pressure feed. • Baud rate from 110 to 9600. • External signal for optional synchronisation of baud rate.
- Serial RS232 interface with parallel option available soon.

COMPUTER KEYBOARDS



TASA 56 key touch sensitive keyboard. All ASCII characters including control keys. Parallel output with strobe. Shift lock. Keys coded in 3 colours to indicate function. 18 V DC at 35 mA. 15" x 6.25" x 0.385" thick. Black resin encapsulated.

49.50 + VAT

Star Devices MK III 71 keytouch sensitive keyboard. With numeric pad. All ASCII characters including control keys. Auto key repeat. Parallel output with strobe. Shift lock with indicator LED. Built in 'beeper' with level control. 5 V DC at 300 mA 15" x 7" x 1.25". Grey case with white keys on blue.

48.50 + VAT


Carter 57 key ASCII keyboard. Conventional key board. 128 ASCII characters including control keys. Parallel output with strobe. Shift lock. + 5 V and -12 V DC. 12" x 5.5" x 1.5". Black keys with white legends.

39.34 + VAT.

FERRANTI — "SIZE 14 x 6 x 3" SLOPING FRONT" 60 Key ASCII Coded in steel case. Latched output complete with Plug and Cable with circuit to convert to T.T.L. levels.

In good condition at only £25 + VAT, P/P £2.50

CENTRONS QUICK PRINTER



EXCLUSIVE TO HENRY'S 50% OFF MAKER'S PRICE

for: • Software selectable 20, 40 and 80 column using 120mm aluminium-ised paper. 1 roll supplied.

TANDY, • 150 lines per minute.
PET, • Centronics parallel data interface for Nascom, Tandy, etc.

• 240 volt mains input. ASCII character set

• Paper feed, and on/off select switches

'BELL' signal Weight 10lbs

Size: 13" x 10 1/2" x 4 1/2" LIST PRICE £400

New, boxed and fully guaranteed

POST PAID Price £195.00 + VAT

See COMPUTING TODAY Recommendations

TANGERINE

COMPUTER SYSTEMS

Microtan 65 Kit, Incl. VAT £79.35

Microtan 65 Assembled, Incl. VAT £90.85

Tanex (min. con) Kit, Incl. VAT £49.45

Tanex Assembled Incl. VAT £60.95

Lower case pack, Incl. VAT £10.90

Chunky Graphics Pack, Incl. VAT £7.50

20 Way Keypad Incl. VAT £8.95

Mini-mother board Incl. VAT £9.95

SEND FOR COMPLETE COMPUTER BROCHURE FREEPOST TO ADDRESS BELOW

Your London & National Nascom Distributor.
Export Orders deduct VAT, but add 5% carriage
Official Export & Educational Orders welcome
Our Telex 262284 Mono Ref. 1400 Transonics

ADD VAT
15%
TO YOUR
ORDER



HENRY'S

Computer Kit Division

404 Edgware Road, London, W2, England
01-402 6822



A complete simulation game for a TI59 but with sufficient detail for implementation on any system.

This is a game which simulates stockmarket activities, such as the buying and selling of shares in different companies, movement of prices, takeovers, bankruptcies, tax, bonuses, suspensions and market collapses. These events are randomly controlled by the calculator.

The object of the game (other than just survival) is to achieve the largest sum of money possible before the inevitable market collapse. A "gift" of £1000 is deposited in the bank at the start of the game, and it is by using this capital to make sound investments that profits will be accumulated. The original and, as yet, unrealised object of the game was to achieve £1 million deposited in the bank. The current record stands at £229,000 at stockmarket collapse.

The game itself has tremendous variety, and the two simple Buy and Sell commands potentially give the player complete control over the situation — if he uses them wisely!

The program and data memories are best recorded on two magnetic cards, making sure before programming that the partition is 639.39. A different game will be played on each occasion provided that either

- (i) A different buying and selling scheme is followed
- or (ii) Pressing 2nd E' a few times 'warms up' the random number generator.
- or (iii) A different random number seed between 0 and 199017 is inserted into register 9.

Games can vary enormously in length due to the random nature of the ending, but an average time of playing works out at about 25 runs, and a good Bank Balance would be about £75,000.

The Background.

The Companies

The scenario is a mythical stockmarket in which investment is possible in four companies involved in mining. The companies themselves adopt the names of the metals they mine. These are:

GOLD, TIN, ZINC, LEAD

Shares are brought in units and the price of these units may vary considerably not only from one metal to another, but in the metal itself. At the start of the game, each company's units are on sale at their average*+ price. See Table.

"Floor" Value "Average" "Ceiling" Value

LEAD	1	10	20
ZINC	5	50	100
TIN	25	250	500
GOLD	125	1250	2500

*This is not precisely true.

+For further discussion of this see 'The Program'

The prices are controlled randomly (See Market News) but with an algorithm which is best described by

- (i) If the company is highly priced in its range it has a high probability of dropping in value.
- (ii) If a company is mid-priced in its range there is an equal probability of it dropping or rising.
- (iii) If a company is low-priced in its range there is an equal probability of it rising in value.

All this means is that if a share is priced below its AVERAGE (which is also its Starting Value) it is best to buy, and if priced above, it is best to sell.+

These are obviously general rules and should not be followed verbatim, for the elements of risk taking in letting shares ride high, and suspense in waiting for shares to drop are the spices which add zest to the game.

The Bank

The player has an account into which, at the start of the game, £1,000 has been deposited. This account is credited when shares are sold, and bonuses are gained and debited when purchases are made and tax is due. All these transactions are effected automatically.

There is also a 'Bank' which is in effective control of the game, and which gives interest on money deposited, into which taxes are paid and from which money is paid out.

The interest rate is randomly controlled by the same kind of algorithm as the share prices, and the interest rate varies from

1 — 39%

although this rate is far more stable than the prices.

It is possible to make changes to the program to alter these algorithms and thus change the nature of the game.

See 'Variations'.

Details Of The Game

There are three basic commands in use during the course of the game.

A — This leads directly to the next round which consists of

- (i) Market News
- (ii) Newsflash (possibly)
- (iii) Current Holding

B — Buy

C — Sell

There are also three other minor commands which may be used if necessary

2nd E' — This can be used at the start of the game for 'warming up' the randomiser.

SBR5BR — This can be used at any time when the calculator has stopped for finding out the current Bank Balance.

SBR594 — This can be used to terminate the game, and to reset registers for starting a new game.

Here follows an in-depth study of the various sections.

(i) Market News

The Companies

This is the main vehicle of Stockmarket Events. Each of the companies are printed in turn.

LEAD

ZINC

Followed by the events

TIN

which have overtaken them.

GOLD

These events are listed as follows:

(i) HOLD

The price of the share remains unchanged.

(ii) X UP

The price of shares increases by X

(iii) X DOWN

The price of shares decreases by X

[In the above three cases the new price is printed beneath the message]

Or — there may be a newsflash, followed by

(iv) SUSPENDED

The player may not buy or sell in that company in the current round.

All shares held by the player in that company are forfeited, and the company is reset to its starting value.

All shares held by the player in that company are automatically sold for the price shown.

Player has escaped takeover at last minute — no shares sold.
[In cases (iv) — (vii) above no share price is printed as no
dealings can be made in that company in the current round.
If this is tried a message will be printed — “SUSPENDED”]
In cases (v) and (vi) above the shares are reset to their start-
ing value after TAKEOVER and BANKRUPTCY.

The Bank news may be

The player will be credited with X% of his current bank account.

There may be a NEWSFLASH here

No interest is printed, and the player receives none in his account.

The Bank collapses and all money therein is lost!

When companies are bankrupt or taken over and the bank fails, they are envisaged as rising, phoenix-like to their former glory in order that as much variety of investment is maintained as possible.

At moments during the game, the flow *may* be interrupted to go into a NEWSFLASH. There are three NEWSFLASH subroutines — one for companies, one for the bank (both used within the 'Market News' routine) and the third, the main one will be an event chosen at random from over fifty different possibilities.

All movements of money are effected automatically by the Subroutine.

The possible events are :

The current market prices and Bank Rate is disregarded and a new Market News listing is printed.

The Player's current Bank Balance is debited by X% of the total.

No effect — A possible supertax cancelled at the last minute.

The Player's Bank Balance is credited with X% of the current total.

No effect — A possible Tax Bonus cancelled at the last minute.

X% of the total value of the player's holdings in the named metal are calculated at Current Market value, and his account credited with this.

No effect — A possible Metal Bonus cancelled at the last minute.

The player's current holding in the named metal is examined. He is then awarded one further share in the company for every two owned by him.

This sub-subroutine leads directly to the end of the game. All shares held by the player in each company are sold in turn as in a normal takeover the prices being printed at which each is sold at.

The final bank balance is printed with the message
'GAME ENDED'

N.B. The calculator may not go into this NEWSFLASH Routine at all, and may continue without pause to the next section.

Under the title 'YOU HOLD' will be printed a listing of the player's present holdings in each of the companies and the amount in his account, updated to include money and share transactions made as a result of takeovers, taxes bonuses etc.

These are the two *real* options open to the player. A buy or sell command is effected as follows.

ENTER a decimal as follows : • THEN PRESS **(B)** = BUY or **(C)** = SELL

e.g. $4 \cdot 3$ (B)
means Buy 4 ZINC

The CODES are as follows :

1 ≡ GOLD
2 ≡ TIN
3 ≡ ZINC
4 ≡ LEAD

N.B. that these codes are in order of value and not in order of printout in 'Market News'.

After entering the instructions and pressing B or C one of several things may happen.

(i) The Calculator prints 'BUY' or 'SELL' followed by the number and metal specified. This means that the instructions have been accepted, understood and acted upon – and the player's bank account has been credited or debited as applicable.

(ii) One of the following messages is printed :

There are insufficient funds in the player's account to cover the intended purchase.

No dealings are allowed in that company in that particular round. (See Market News)

This may be printed for various reasons including :

An attempt to sell non-existent shares

An attempt to buy or sell negative amounts of shares

Entering an undefined code number

The calculator may suspend dealings in the current market. This will be done *before* buying or selling, and any instructions entered prior to this will be disregarded.

The calculator goes into the Newsflash Subroutine. This will happen *after* the buying or selling has occurred!

Any number of buyings or sellings may be made if a mistake has been made e.g. 4 gold shares bought by accident, then this may be corrected by selling 4 gold shares.

If after Buying or Selling the Player wishes to inspect his current holdings in the bank he may do so by pressing
SBR SBR

53

User Instructions

1. Making sure that Master Library 1 is in position and the calculator connected to the printer, reset the partition to 639.39. By command 4 2nd Op 1 7. Enter program and data memories, either from cards (4 sides needed) or from keyboard.
2. To begin the game, press A.
3. Inspect Market News, Newsflash (if any) and Current

Bank Balance. Compile coded purchase and enter it pressing B (see 'BUYING and SELLING')

4. When all purchases have been made press A again.
5. Repeat step 3 making sales and purchases as applicable until game is terminated or until £1 million made.

At any point SBR SBR may be pressed to gain knowledge of Bank account.

SAMPLE GAME

TO START THE FIRST AND EVERY ROUND, PRESS A.

YOU HOLD

PRINTOUT		COMMENTS	
(A)			
MARKET . . NEWS			
LEAD			Lead maintain starting value
HOLD			
	10.		
ZINC			
	25.	UP	Zinc increase from 50 to 75
	75.		
TIN			
HOLD			Tin maintain starting value
	250.		
GOLD			
	375.	DOWN	Gold decrease from 1250 to 875
	875.		
BANK			
	20.	%	Bank rate
YOU HOLD			
	0.	LEAD	
	0.	ZINC	
	0.	TIN	
	0.	GOLD	
	1200.00	BANK	Bank = £1000 at 20% = £200 extra

0.	LEAD
0.	ZINC
4.	TIN
0.	GOLD
1561.60	

4.2

(C)

SELL

4. TIN

(A)

MARKET . . NEWS

LEAD

4. UP

16.

ZINC

15. UP

90.

Zinc almost reach ceiling

TIN

50. DOWN

250.

GOLD

250. DOWN

1125.

BANK

19. %

NEWSFLASH

MARKET . .

SUSPENDED

MARKET . . NEWS

LEAD

HOLD

16.

ZINC

20. DOWN

70.

Zinc drop from their 'ceiling'

TIN

25. DOWN

225.

GOLD

125. DOWN

1000.

BANK

19. %

NEWSFLASH

TAX BONUS

50. %

Bonus of 50% of Account

YOU HOLD

0. LEAD

0. ZINC

0. TIN

0. GOLD

4929.46 BANK Current Bank level

4.2

(B)

BUY

4.

TIN

4 TIN units bought at £250 each

SBR SBR

200.00

BANK

£200 left

(A)

MARKET . . NEWS

LEAD

2.

UP

12.

ZINC

No dealings in Zinc allowed

NEWSFLASH

SUSPENDED

TIN

50.

UP

Our investment in Tin is paying off

GOLD

500.

UP

1375.

BANK

22.

%

NEWSFLASH

TIN


BONUS

90.


%

Fortunate! This gives an extra £1080. i.e. 4 Tin shares at £300 = £1200 90% of £1200 = £1080

STOCK MARKET

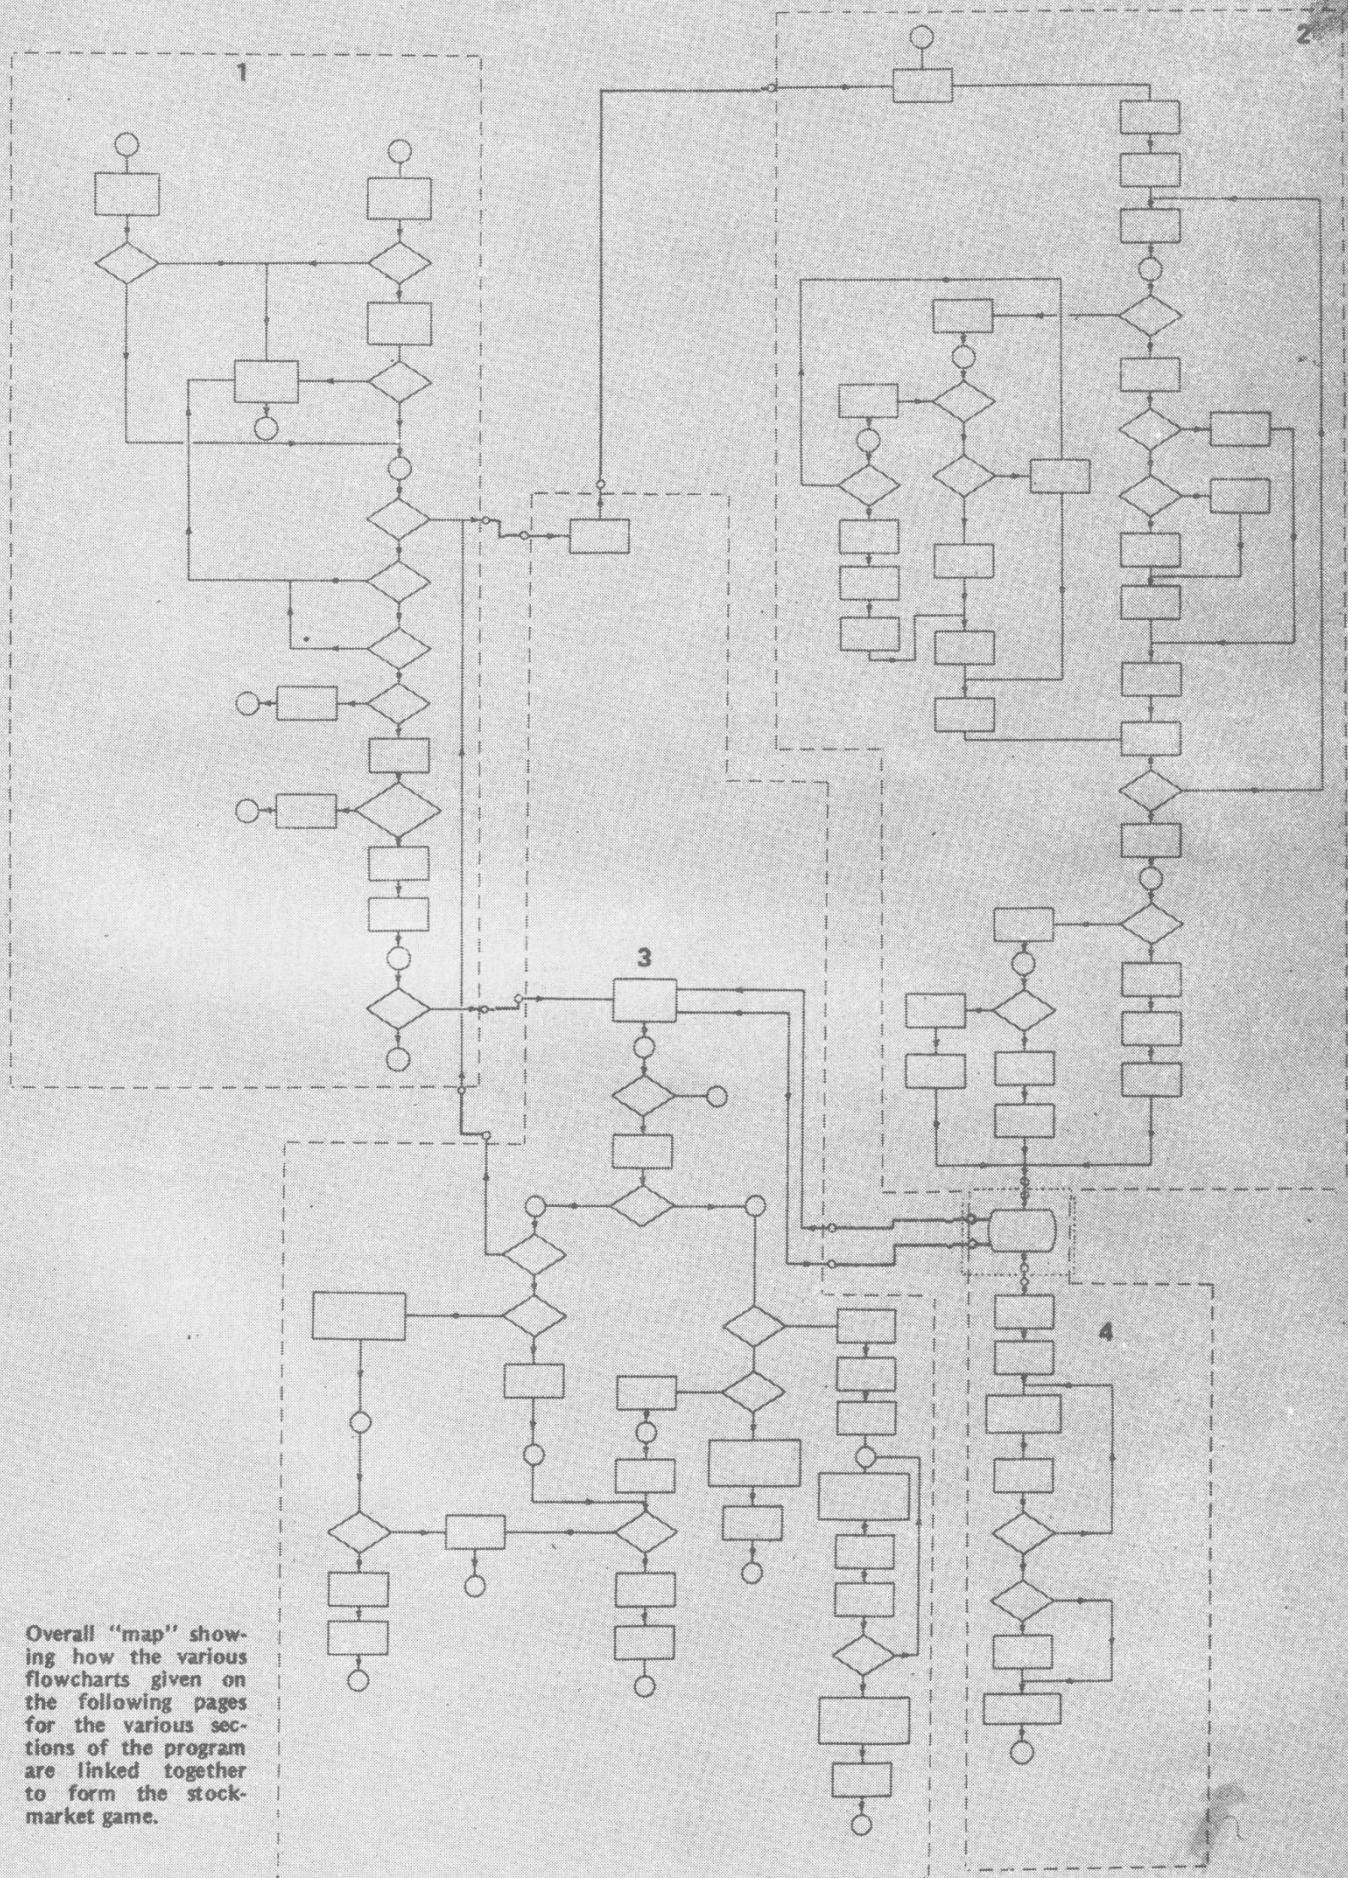

Overall "map" showing how the various flowcharts given on the following pages for the various sections of the program are linked together to form the stock-market game.

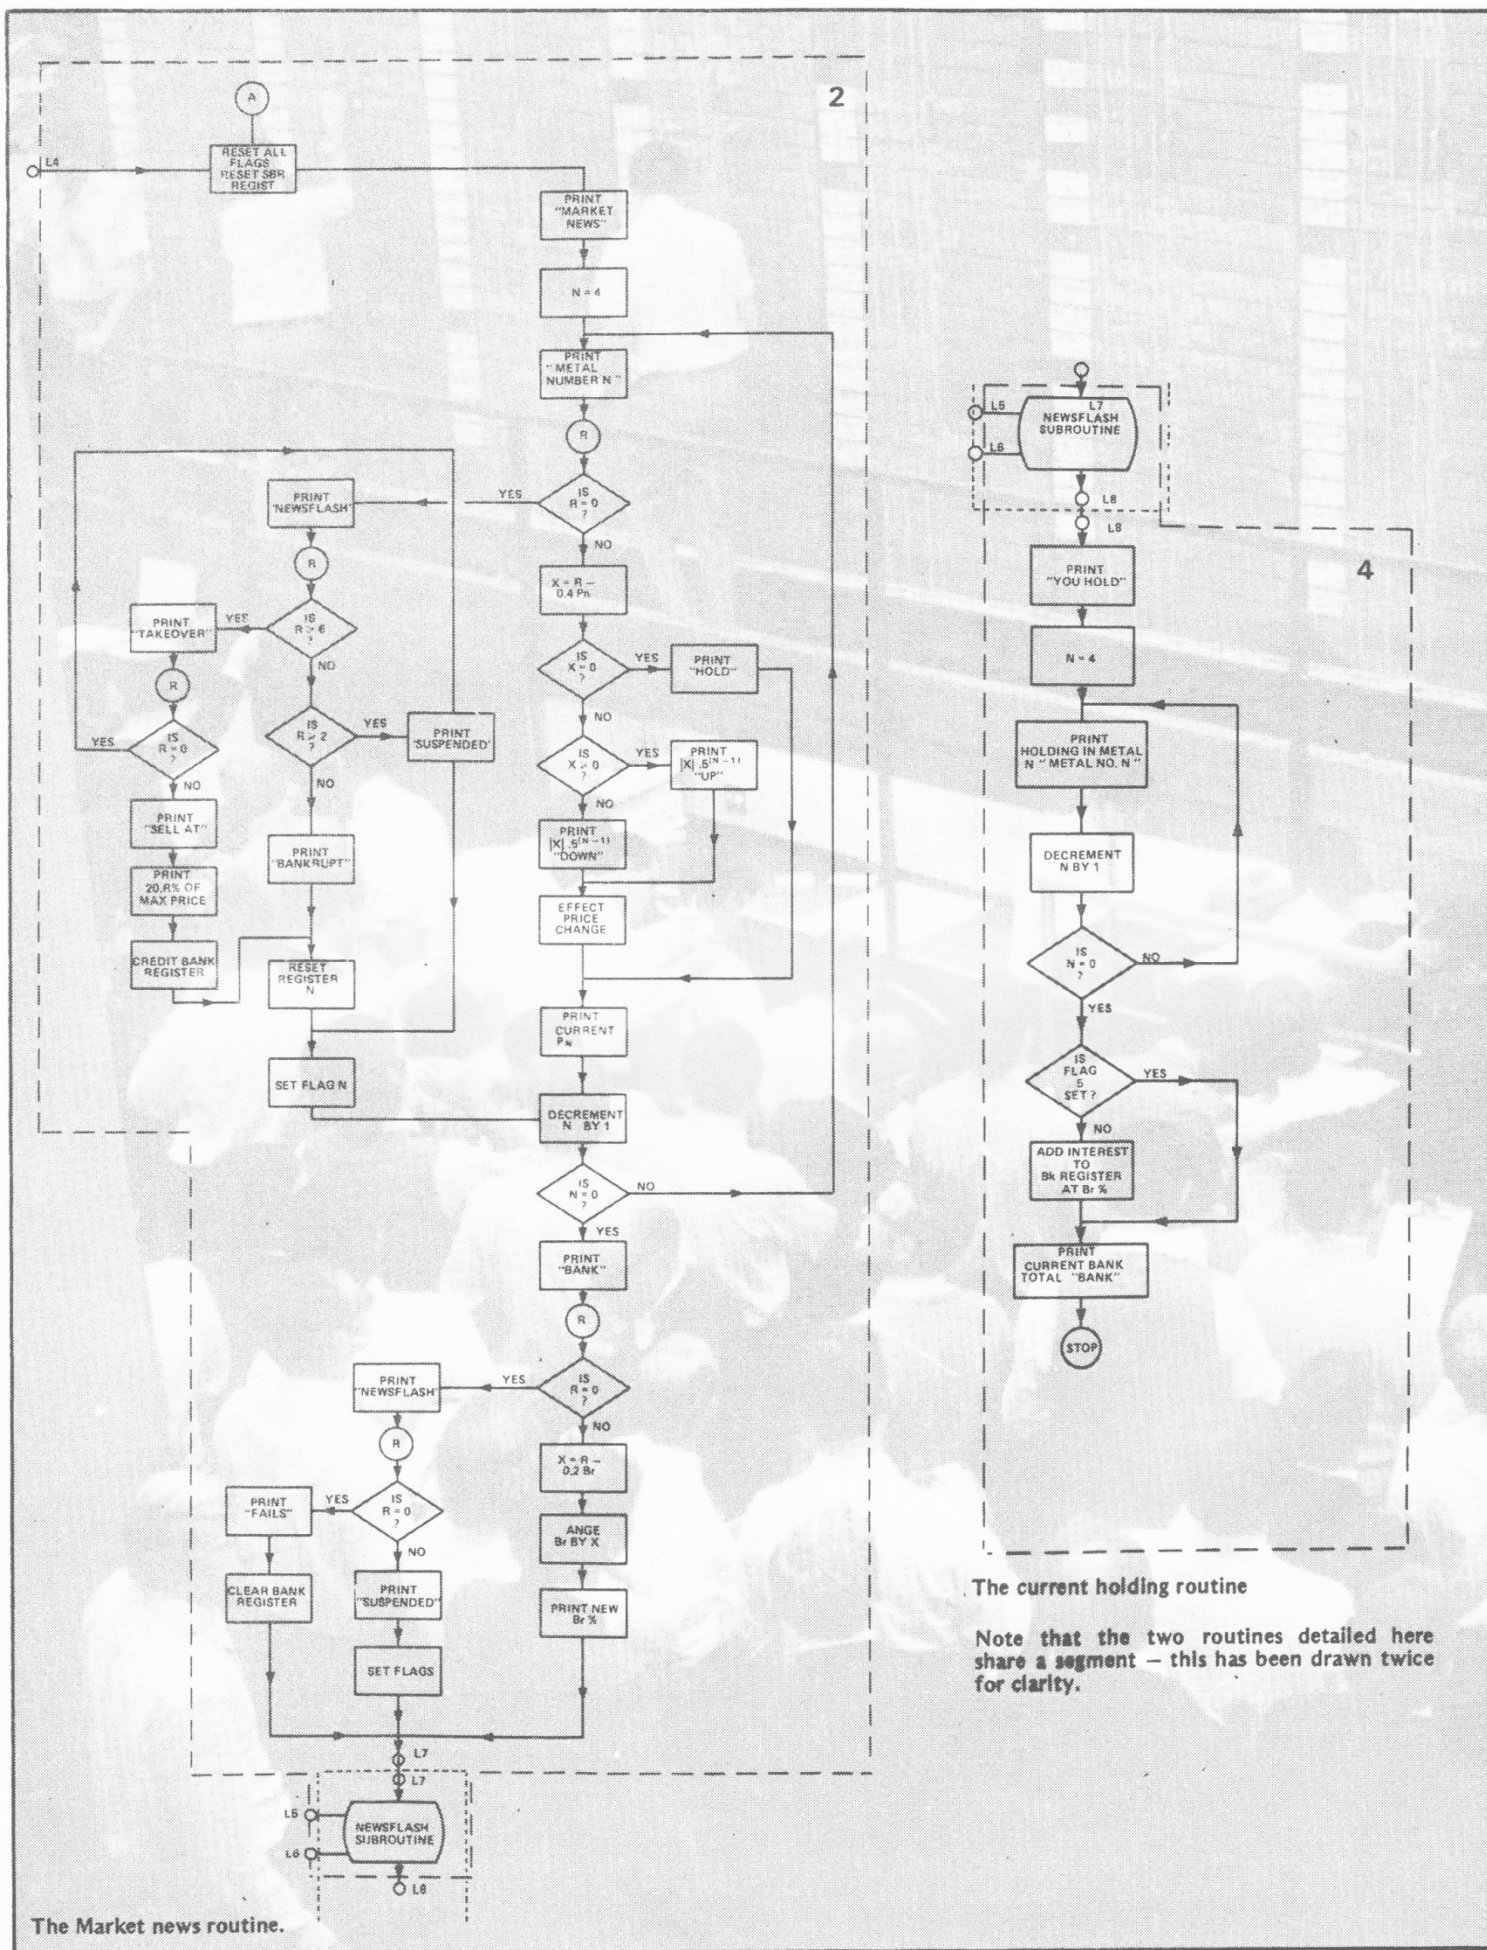

STOCK MARKET

2.1

(B)
BUY

2. GOLD Newsflash after Buying
NEWSFLASH
LEAD
BONUS 60. % No lead shares owned

4.2

(B)
BUY

4. TIN

(A)

MARKET . . NEWS
LEAD
NEWSFLASH
SUSPENDED
ZINC

15. DOWN
55.

TIN 75. UP Tin investment increases in
300. value

GOLD HOLD 1000. Gold maintains

BANK 19. %
NEWSFLASH
GOLD We hold 2 gold shares. We
BONUS ISSUE obtain a further 1.

YOU HOLD 0. LEAD
0. ZINC
4. TIN
3. GOLD 3 gold now held
2415.05 BANK

4.2

(C)
SELL

4. TIN Sold all tin shares

SBR SBR

3615.05 BANK

2.1

(B)
BUY

2. GOLD Buying into Gold

(A)

MARKET . . NEWS
LEAD No dealings in lead allowed
NEWSFLASH
SUSPENDED
ZINC

15. DOWN Zinc now worth buying
40.

TIN
NEWSFLASH
TAKEOVER Takeover — at very low price
SELL AT

50.

GOLD

HOLD

1000.

BANK

23. %

NEWSFLASH
ZINC
BONUS ISSUE
YOU HOLD

0. LEAD
0. ZINC
0. TIN
5. GOLD
1986.51 BANK

15.3

(B)

BUY

15. ZINC

(A)

MARKET . . NEWS
LEAD

4. DOWN
12.

ZINC

25. UP Good profit made on Zinc
65.

TIN

100. UP
350.

GOLD
HOLD

1000.

BANK

26. %

YOU HOLD

0. LEAD
15. ZINC
0. TIN
5. GOLD
1747.01 BANK

15.3

(C)

SELL

15. ZINC

SBR SBR

2722.01 BANK

1.1

(B)

BUY

1. GOLD


(A)

MARKET . . NEWS
LEAD

3. UP
15.

ZINC
NEWSFLASH
SUSPENDED
TIN


The Buy and Sell routines.

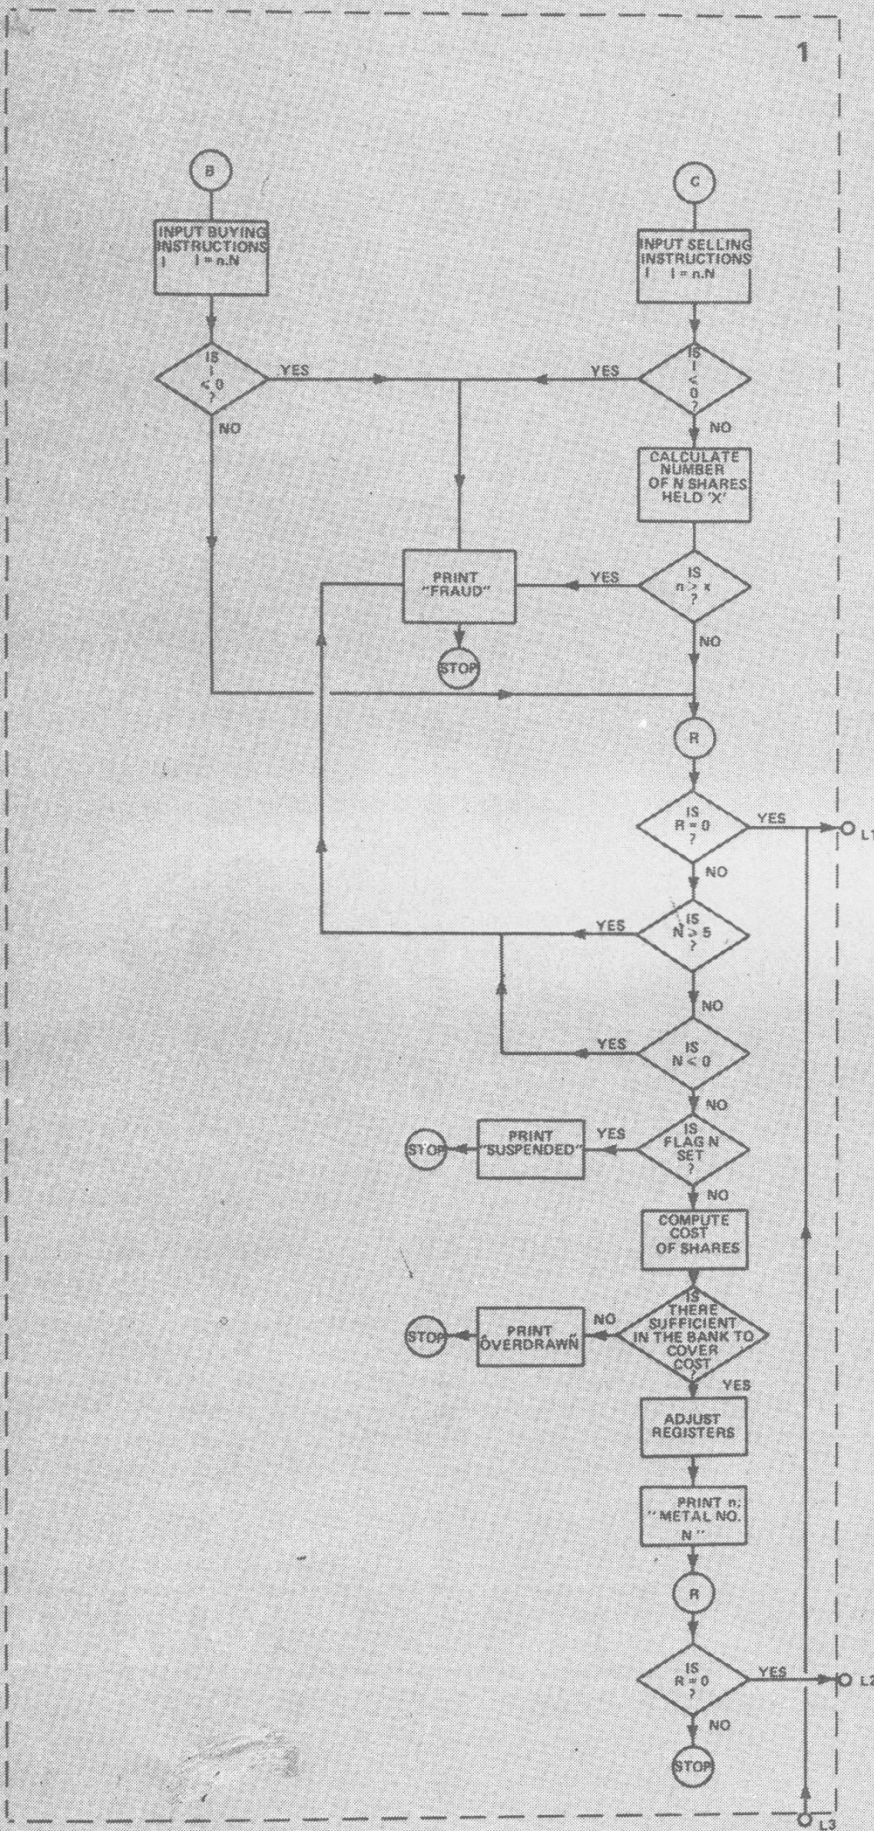

By now you will undoubtedly have noticed there is no listing given here for this program. If you own a TI-59 and would like a copy, an SAE to our Charing Cross Offices will bring you one Post Office Haste. For owners of other machines the flow charts herein should assist in getting the program converted. We'd be very interested to see a BASIC version of this simulation, so if you get it running — give us a shout!

STOCK MARKET

The Newsflash routine.

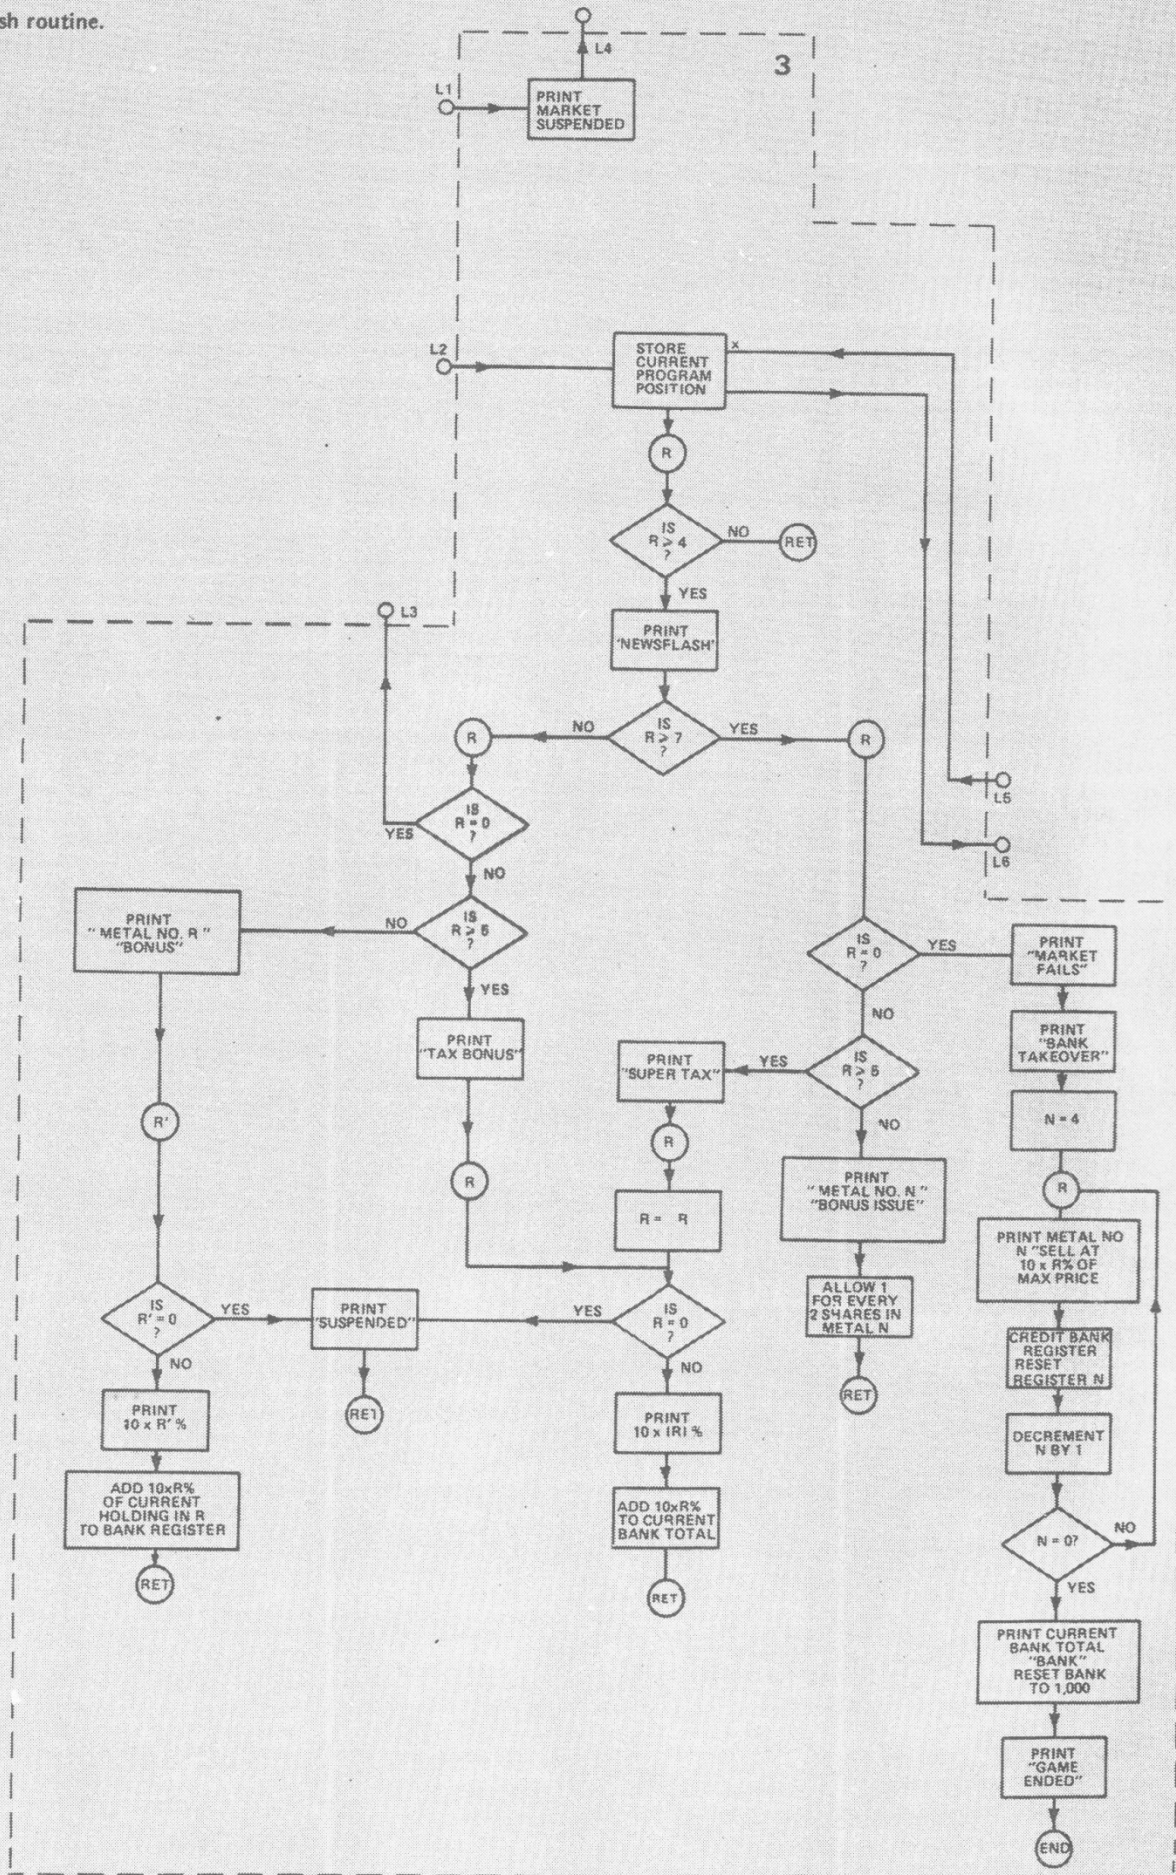

STOCK MARKET

HOLD 350.
GOLD HOLD 1000. Still no movement in Gold
BANK 26. %
YOU HOLD
0. LEAD
0. ZINC
0. TIN
6. GOLD
2169.73 BANK Nothing to do

BANK 24. %
NEWSFLASH
SUPER TAX 40. %
YOU HOLD
0. LEAD
0. ZINC
0. TIN
10. GOLD
1321.93 BANK

(A)
MARKET . . NEWS
LEAD 2. DOWN
13.
ZINC
NEWSFLASH
TAKEOVER
SELL AT 70.
TIN HOLD 350.
GOLD 125. DOWN After all that it goes down!
875.
BANK 28. %
NEWSFLASH
TAX BONUS 90. % Massive Tax Bonus!!
YOU HOLD
0. LEAD
0. ZINC
0. TIN
6. GOLD
5276.79 BANK

10.1
(C)
SELL 10. GOLD
SBR SBR
17571.93 BANK

(A)
MARKET . . NEWS
LEAD 1. UP
13.
ZINC
NEWSFLASH
SUSPENDED
TIN 25. UP
325.
GOLD 125. UP Should have waited!
1750.
BANK 25. %
Ending!
Calculator selling off shares

4.1
(B)
BUY 4. GOLD Buy while they're cheap

(A)
MARKET . . NEWS
LEAD 1. DOWN
12.
ZINC 10. UP
60.
TIN 50. DOWN
300.
GOLD 750 UP Massive increase.
1625. Worth waiting for.

NEWSFLASH
MARKET . . FAILS
BANK
TAKEOVER
LEAD
SELL AT 18.
ZINC
SELL AT 10.
TIN
SELL AT 250.
GOLD
SELL AT 2250.
YOU HOLD
17571.93 BANK
GAME ENDED END OF GAME

Total amount £17,571 . . . but game very short.

CT MARKET PLACE



1 CLOCK RADIO

How about a round clock radio which can double as a very smart desk clock — as we can testify!

To time, rotate one end of the cylinder to display the frequency selected. Most of the functions are controlled by a push-button panel and the display is a large, clear LCD affair.

Made by Hanimex, the battery clock radio comes in white, white or white. It will lull you to sleep and then turn itself off an hour later and waken you to the sound of Radio 1, or music if you prefer.

£17.95

To: CLOCK RADIO offer
CT Magazine, 145 Charing Cross Road
London, WC2H 0EE

Name

Address

2 DIGITAL ALARM

This mains-only Hanimex alarm has a large 12-hour display incorporating AM/PM and alarm set indicators. You can have a dim or bright display at the touch of a switch. Fast and slow setting buttons make time setting simplicity itself. You can forget about knocking these accidentally in the morning scramble to turn off the alarm, as a locking switch is fitted under the clock. A 9-minute snooze switch completes the list of all mod. clock cons.

£10.60

To: DIGITAL ALARM offer
CT Magazine, 145 Charing Cross Road
London, WC2H 0EE

Name

Address

3 LCD CHRONO

Our Chrono comes complete with a high grade adjustable metal strap and is fully guaranteed.

The LCD display shows seconds as well as hours and minutes. Press a button and you get the date and day of the week.

Press another button and you have an accurate stopwatch with hundredths of seconds displayed, giving the time up to an hour. There's a lap time facility, too — and of course a back light.

£11.95

To: LCD WATCH offer
CT Magazine, 145 Charing Cross Road
London, WC2H 0EE

Name

Address

4 LCD ALARM CHRONO

This is no ordinary watch. It's a slim, multi-function, dual time LCD alarm chronograph.

This model will show hours, minutes, seconds, date, day of the week, stopwatch, split time, alarm and alternate dual time zone — not all at once of course. There's a night light, too.

Hours, minutes, seconds and day of the week are displayed continuously, while the date will appear at the touch of a button. The alarm is beefy enough to wake you up in the morning and get you to work on time (or wake you up when it's time to go home).

£16.95

To: ALARM/CHRONO LCD WATCH
offer
CT Magazine, 145 Charing Cross Road
London, WC2H 0EE

Name

Address

All prices include 15% VAT and postage

Examples of Marketplace offers can be seen at our Charing Cross Road offices.

Please mark your envelope with the offer that you want and order separately from offers shown elsewhere in CT.

Let the computer do the work with this low cost cassette interface for the Mk 14.

The tape interface described here uses a tone of 2 kHz for logic 1 and no-tone for logic 0. This type of circuit has the disadvantage that an initial bit of zero will go undetected, since the lead-in tape is equivalent to logic 0. As such the software needs to be designed to cope with this — as is done on the Mk-14.

Since it may be desired to use this interface with other microprocessors an outline of the kind of software required will be considered.

As any initial zeros will be missed a start bit of logic 1 is necessary — to inform the microprocessor that what follows is data. As with any cassette tape system, reliance upon constant speed is not possible and therefore it is necessary to have short breaks in the data on the cassette — where the program can get back into step with the tape.

Getting Round It

There are two methods of satisfying the above requirements. The first is where each byte is recorded with an initial bit of one and after the eight bits of data there are two bits of zero. Thus each byte is composed of eleven bits when recorded on the tape. The other method, which is used on the Mk-14, is to encode each bit. If the bit of data is considered as two units long, then there is a one unit start sub-bit of logic 1 and then a two unit data bit followed finally by three units of logic 0 — comprising the stop sub-bit. These two forms are represented diagrammatically in Figure 1, along with the format used with most FSK interfaces. As the FSK type software generates a start bit of zero, and stop bits of one it will be necessary to invert the output from and the input to the microprocessor.

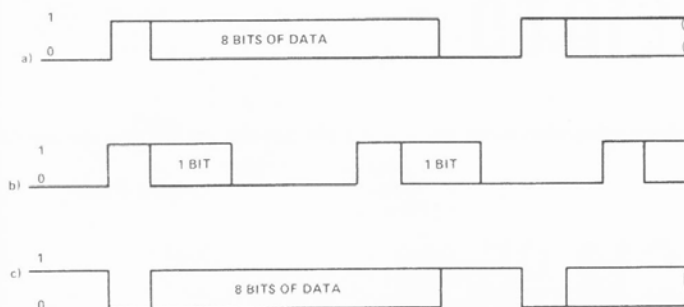


Fig. 1. The three methods of recording data :

- Similar method to FSK but interface compatible,
- The Mk-14 method,
- The FSK method.

Note that if you use software for c) the input and output of the interface need to be inverted.

Simplified flow-diagrams are given for the first two methods and it should be quite easy to convert these to machine code for different microprocessors. The circuit extends a logic 1 slightly, on decoding, as such it may be necessary to modify the software slightly (or try adding a 10 ohm resistor in series with C6), but with the cheapness of the circuit to build — with relation to other interfaces it is worth trying.

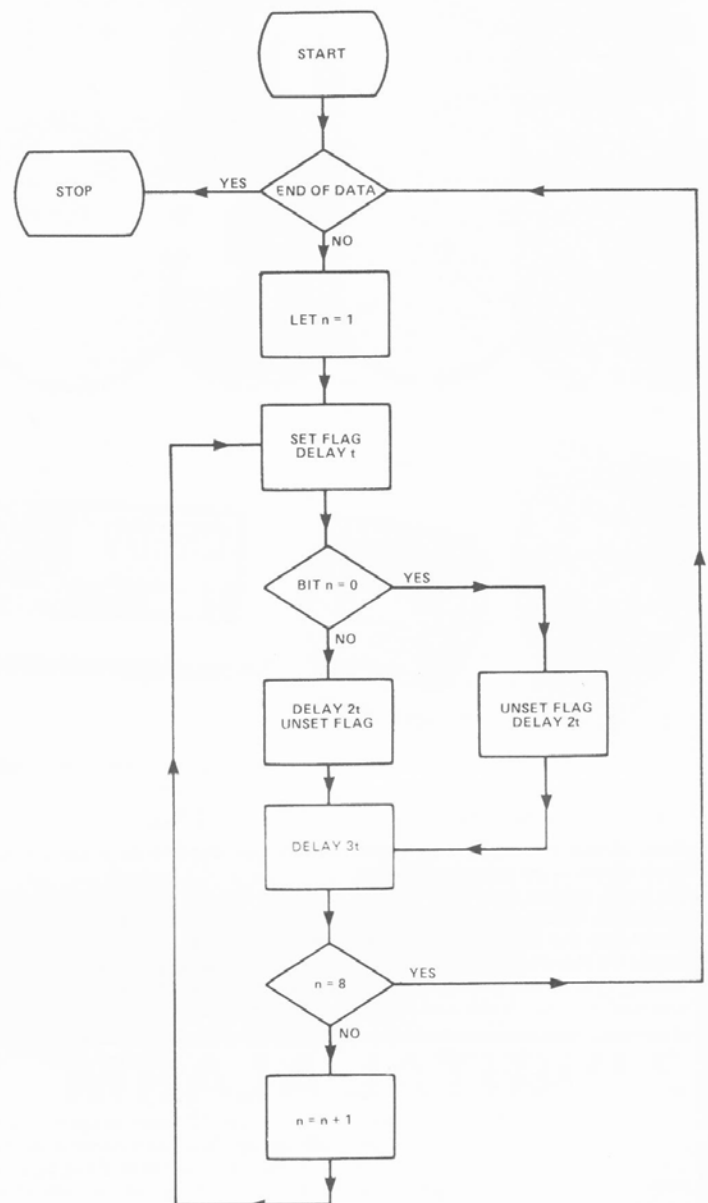


Fig. 2. Flowchart 2a) shows output of data by method 1b) and 2b) shows data input by the same method.

Since everything to do with this circuit was on a very low budget, the cassette recorder used had an automatic level control — ALC (which many tape interfaces are advised to stay away from).

A Problem Start

The tape interface suffered from a few problems when first used and these were due to the recorder picking up any electro-magnetic radiation, up to and including radio frequencies. These were removed by screening the tape recorder and the correct adjustment of RV1.

Since the power was taken from the Mk-14 (not advised), noise over the whole spectrum was being fed into the recorder and if you find that you have this problem, to a high level, IC2a should be included.

The circuit, after these precautions worked at home, but when taken to school (where the Mk-14 belongs) it refused to work when a nearby Teletype was operated. This was because the Teletype acted as a weak spark transmitter, which caused 'clicks' on the tape. The problem has two solu-

MK14 CASSETTE INTERFACE

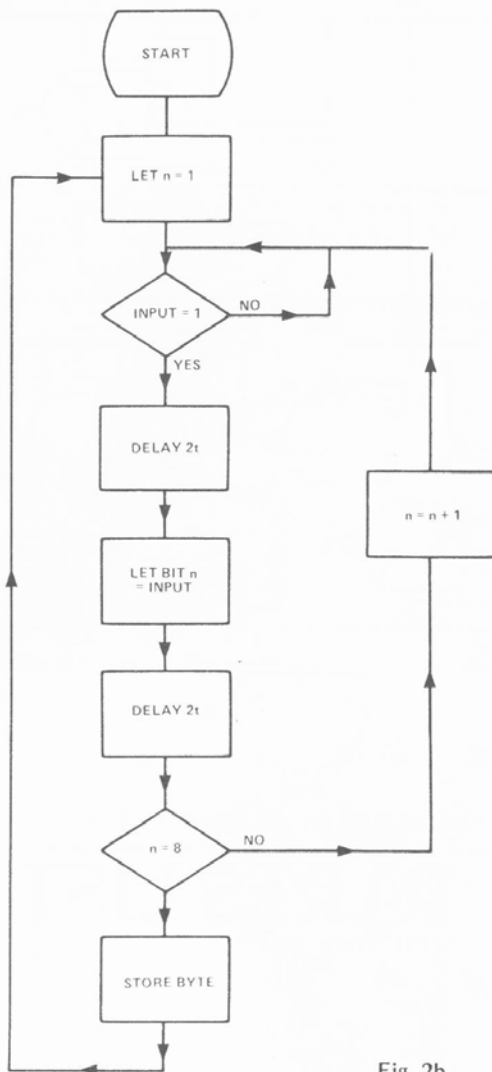


Fig. 2b

tions — buy a better tape recorder, or stop typing on the Teletype when programs are being recorded. So systems using Teletypes, BEWARE!

Construction

The circuit was constructed on a piece of veroboard (Figure 6), the board should be larger than shown, in case it is necessary to include IC2. The breaks in the board are made first, followed by the wire links. The components may then be mounted in any order.

Should it be found later that IC2 is required — with your tape recorder, then break the track at B19 and connect B18 to the input of the inverter and B20 to the output of the inverter. The inverter can be obtained from a 7400.

For best results screened leads need to be used to connect up to the tape recorder. The supply was taken from the Mk-14. However, this is not advised, since the regulator may be pushed past its limits.

Set-Up And Adjustment

When the circuit is first switched on the LED should flash momentarily — if not the LED is probably the wrong way round. Plug the circuit into the microphone input and start recording.

The flag 0 input should now be alternately touched to ground and allowed to float, at about half second inter-

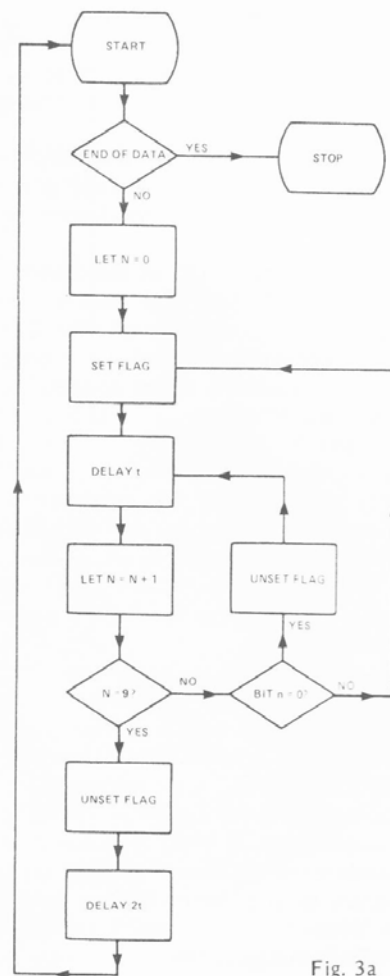


Fig. 3a

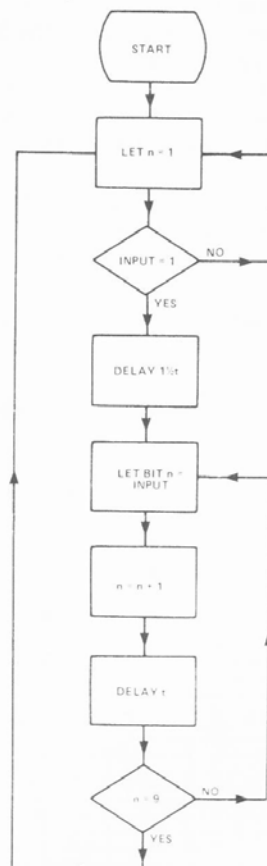


Fig. 3b

Fig.3. As Fig.2 but using method 1a).

MK14 CASSETTE INTERFACE


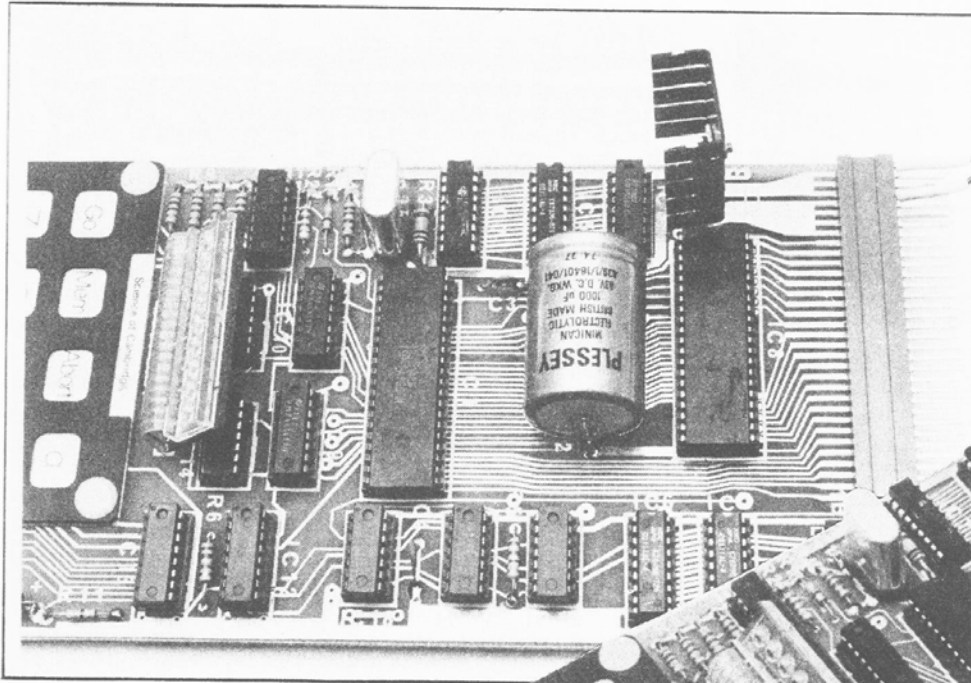


Table 2: Program to set and reset flags at half-second intervals.

0F20	07
0F21	8F FF
0F23	8F FF
0F25	8F FF
0F27	07
0F28	8F FF
0F2A	8F FF
0F2C	8F FF
0F2E	C4 20
0F2F	34

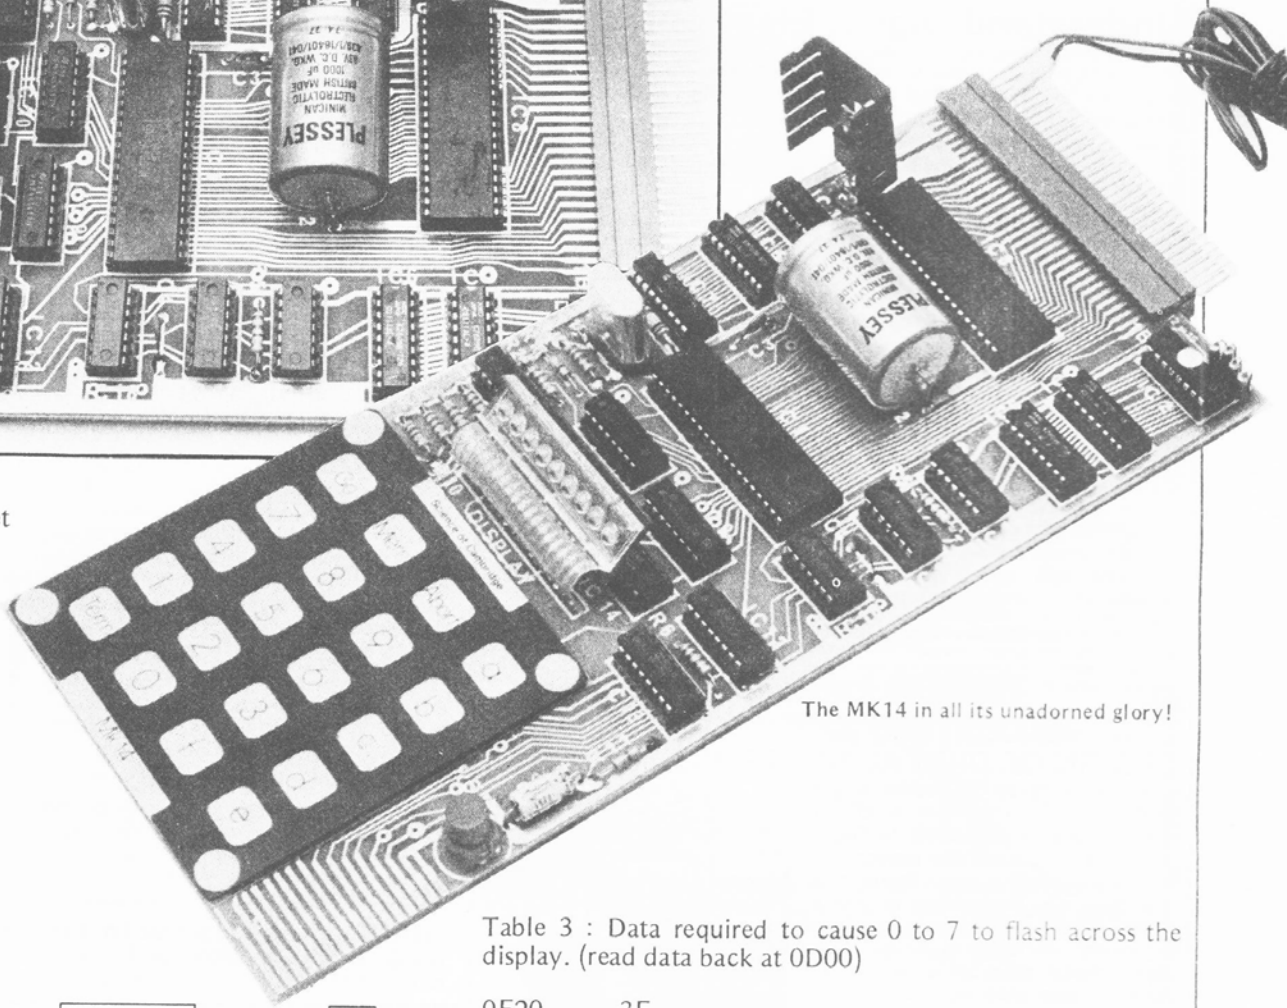

The MK14 in all its unadorned glory!

Table 3: Data required to cause 0 to 7 to flash across the display. (read data back at 0D00)

0F20	3F
0F21	06
0F22	5B
0F23	4F
0F24	66
0F25	6D
0F26	7D
0F27	16

0FF8	= 07 (count)
0FF9	= 0F
0FFA	= 20

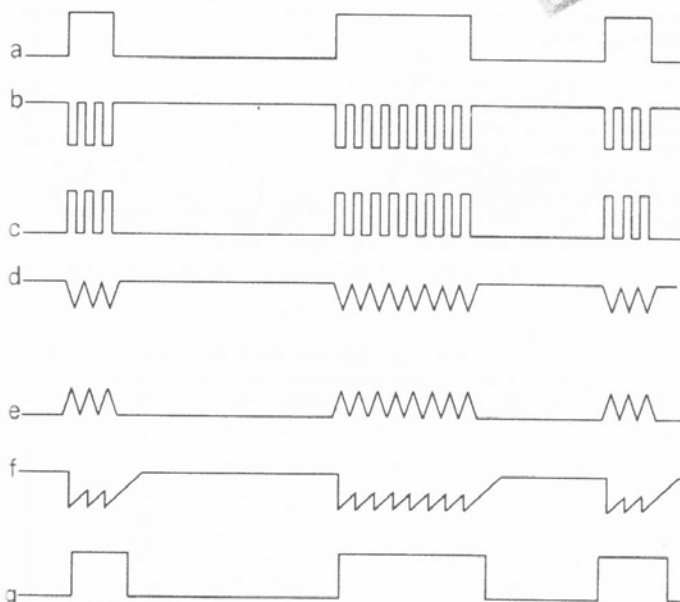


Fig.5. Voltage waveforms as found in the circuit at annotated points.

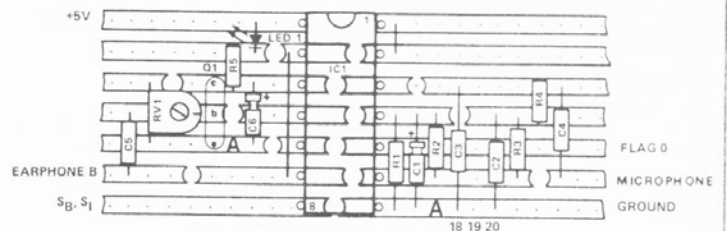


Fig.6. Veroboard layout, a larger piece will be needed if IC2 is required. Note that A must connect to A.

It's faster and more thorough than classroom learning: you pace yourself and answer questions on each new aspect as you go. This gives rare satisfaction - you know that you are really learning and without mindless drudgery. With a good self-instruction course you become your own best teacher.

Understand Digital Electronics

In the years ahead digital electronics will play an increasing part in your life. Calculators and digital watches mushroomed in the 1970's - soon we will have digital car instrumentation, cash cards, TV messages from friends and electronic mail. After completing these books you will have broadened your career prospects and increased your knowledge of the fast-changing world around you.

DIGITAL COMPUTER LOGIC AND ELECTRONICS £7.50

This course is designed as an introduction to digital electronics and is written at a pace that suits the raw beginner. No mathematical knowledge is assumed other than the use of simple arithmetic and decimals and no electronic knowledge is expected at all. The course moves painstakingly through all the basic concepts of digital electronics in a simple and concise fashion: questions and answers on every page make sure that the points are understood.

Everyone can learn from it - students, engineers, hobbyists, housewives, scientists. Its four A4 volumes consist of:

- Book 1** Binary, octal and decimal number systems; conversion between number systems; conversion of fractions; octal-decimal conversion tables.
- Book 2** AND, OR gates; inverters; NOR and NAND gates; truth tables; introduction to Boolean algebra.
- Book 3** Positive ECL; De Morgans Laws; designing logic circuits using NOR gates; dual-input gates.
- Book 4** Introduction to pulse driven circuits; R-S and J-K flip flops; binary counters; shift registers; half adders.

DESIGN OF DIGITAL SYSTEMS £11.50

This course takes the reader to real proficiency. Written in a similar question and answer style to Digital Computer Logic and Electronics, this course moves at a much faster pace and goes into the subject in greater depth. Ideally suited for scientists or engineers wanting to know more about digital electronics, its six A4 volumes lead step by step through number systems and Boolean algebra to memories, counters and arithmetic circuits and finally to an understanding of calculator and computer design.

- Book 1** Octal, hexadecimal and binary number systems; conversion between number systems; representation of negative numbers; complementary systems; binary multiplication and division.
- Book 2** OR and AND functions; logic gates; NOT, exclusive-OR, NAND, NOR and exclusive-NOR functions; multiple input gates; truth tables; De Morgans Laws; canonical forms; logic conventions; karnaugh mapping; three state and wired logic.
- Book 3** Half adders and full adders; subtractors; serial and parallel adders; processors and arithmetic logic units (ALUs); multiplication and division systems.
- Book 4** Flip flops; shift registers; asynchronous and synchronous counters; ring, Johnson and exclusive-OR feedback counters; random access memories (RAMs) and read only memories (ROMs).
- Book 5** Structure of calculators; keyboard encoding; decoding display data; register systems; control unit; program ROM; address decoding; instruction sets; instruction decoding; control programme structure.
- Book 6** Central processing unit (CPU); memory organization; character representation; program storage; address modes; input/output systems; program interrupts; interrupt priorities; programming; assemblers; computers; executive programs; operating systems and time sharing.

Flow Charts and Algorithms

are the essential logical procedures used in all computer programming and mastering them is the key to success here as well as being a priceless tool in all administrative areas - presenting safety regulations, government legislation, office procedures etc.

THE ALGORITHM WRITER'S GUIDE £3.75

explains how to define questions, put them in the best order and draw the flow chart, with numerous examples.



Microcomputers are coming - ride the wave! Learn to program.

Millions of jobs are threatened but millions more will be created. Learn BASIC - the language of the small computer and the most easy-to-learn computer language in widespread use. Teach yourself with a course which takes you from complete ignorance step-by-step to real proficiency with a unique style of graded hints. In 60 straightforward lessons you will learn the five essentials of programming: problem definition, flowcharting, coding the program, debugging, clear documentation. Harder problems are provided with a series of hints so you never sit glassy-eyed with your mind a blank. You soon learn to tackle really tough tasks such as programs for graphs, cost estimates, compound interest and computer games.



COMPUTER PROGRAMMING IN BASIC £7.50

Book 1 Computers and what they do well; READ, DATA, PRINT, powers, brackets, variable names; LET; errors; coding simple programs.

Book 2 High and low level languages; flowcharting; functions; REM and documentation; INPUT, IF...THEN, GO TO; limitations of computers, problem definition.

Book 3 Compilers and interpreters; loops, FOR...NEXT, RESTORE; debugging; arrays; bubble sorting; TAB.

Book 4 Advanced BASIC; subroutines; string variables; files; complex programming; examples; glossary.

THE BASIC HANDBOOK £11.50

This best-selling American title usefully supplements our BASIC course with an alphabetical guide to the many variations that occur in BASIC terminology. The dozens of BASIC 'dialects' in use today mean programmers often need to translate instructions so that they can be RUN on their system. The BASIC Handbook is clear, easy to use and should save hours of your time and computer time. A must for all users of BASIC throughout the world.

FORTRAN COLORING BOOK £5.40

"If you have to learn Fortran (and no one actually wants to assimilate it for the good of the soul) buy this book. Forget the others - this one is so good it will even help you understand the standard, dense, boring, unintelligible texts." *New Scientist*.

A.N.S. COBOL £4.40

The indispensable guide to the world's No. 1 business language. After 25 hours with this course, one beginner took a consulting job, documenting oil company programs and did invaluable work from the first day. Need we say more?

GUARANTEE - No risk to you

If you are not completely satisfied your money will be refunded on return of the books in good condition.

Please send me:-

....Digital Computer Logic & Electronics @ £7.00

....Design of Digital Systems @ £11.50

....Algorithm Writer's Guide @ £3.75

....Computer Programming in BASIC @ £7.50

....BASIC Handbook @ £11.50

....Fortran Coloring Book @ £5.40

....A.N.S. Cobol @ £4.40

All prices include worldwide surface mailing costs (airmail extra)

IF YOUR ORDER COMES TO OVER £18, DEDUCT £2

Cheques/PO's payable to Cambridge Learning Enterprises or charge to Access/Barclaycard/Diners Club/etc
account no.

Telephone orders from credit card holders accepted on 0480-67446. Overseas customers (inc Eire) use credit card, or bank draft in sterling drawn on a London bank, or International Money Order (add £1 handling charge.)

Name

Address


Cambridge Learning Enterprises, Unit 50 Rivermill Site, FREEPOST, St. Ives, Huntingdon, Cambs PE17 4BR England.

TRANSAM

COMPONENTS AND SYSTEMS FROM TRANSAM COMPUTERS

•CP/M
•BASIC
•PASCAL

TRITON IS IMPRESSIVE!
PRACTICAL COMPUTING REVIEW DEC. 79.

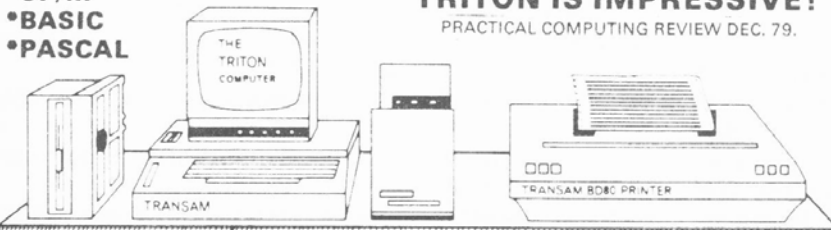

TRITON COMPUTER SYSTEM.

Designed for ease of construction and flexibility. Kits come complete and all components and software are available separately. UK designed and supported. Fully documented hardware and software and a totally flexible approach to system building. Powerful and easy to use system monitors - a range of languages available. Firmware is Eeprom based and upgrading from one level to the next is easy.

- L5.2 with 1.5k monitor 2.5k basic £294.00
- L7.2 with 2k mon 8k extended basic £409.00
- L8.2 4k ed/mon 20k res pascal £611.00
- L9.2 CP/M disc based system P.A.O.
- 8k ram card kit (21141) £97.00
- 8k eeprom cards (EXCL 8 x 2708) £31.00
- Motherboard expansion 8 slot £50.00
- Trap-res assem/edit, etc. (8 x 2708) £80.00
- Transam BD80 bi-dir printer £595.00
- TVM 10 video monitor 9" £79.00
- Eeprom prog (2708) kit £29.50

SEND FOR OUR CATALOGUE FOR FULL DETAILS OF TRITON FEATURES!

CP/M AVAILABLE NOW FOR TRITON

Disc operating system complete with text editor, assembler, debugger, system utilities and complete file management. Makes Triton fully CP/M compatible and able to run CP/M based software. Triton will support up to four 5 1/4 or 8" drives single or double density full CP/M software user group facilities available. SAE for details.

CP/M Disk plus manuals (6) £75.00

DISK DRIVES & POWER SUPPLIES

SHUGART



SA400 5 1/4" drive	£205.00
SA800 8" drive	£380.00
Power one quality power supplies	
CP249 1.5A PSU	£33.00
CP323 2.5A PSU	£60.00
CP205 1.8A PSU	£56.00
CP206 2.8A PSU	£76.00

TCL PASCAL - CP/M compatible

A standard Pascal compiler available on a resident (20k) Eeprom based configuration* or available to run under CP/M on 8" disc plus documentation. CP/M version £120

*P.O.A.

TCL Pascal Manual and specification £6.50

DIL PLUG SOCKETS & SWITCHES

W/WRAP SKTS	OIL SKTS	DIL PLUGS	DIL SWITCHES
80IL 0.20	80IL 0.14	14DIL 0.60	4DIL 1.20
140IL 0.35	140IL 0.15	160IL 0.65	7DIL 1.75
160IL 0.42	160IL 0.17	SCOTCHFLEX	8DIL 1.80
180IL 0.60	180IL 0.24	14DIL 1.30	16w ZIF* 4.45
240IL 0.52	200IL 0.21	160IL 1.50	24w ZIF* 6.20
280IL 0.74	240IL 0.30	24DIL 2.80	
400IL 0.95	280IL 0.36		
	480IL 0.50		
		ZERO INSERTION FORCE	

ZERO INSERTION FORCE

DOUBLE DENSITY \$100 DISK CONTROLLER

Suitable for Triton, DPS-1, etc.


Built and tested will

drive Shugart

compatible 8" or 5 1/4". Drives single or double sided. Uses the 1791 chip and CPU independent crystal.

Manual 50p plus SAE.

Board £195.00 plus VAT



FULL RANGE OF MICRO SUPPORT CHIPS - IN STOCK

SUPPORT		RAMS	
SN74LS00N 22	SN74LS54N 21	SN74LS138N 95	SN74LS195AN 85
SN74LS01N 22	SN74LS55N 21	SN74LS139N 95	SN74LS196N 120
SN74LS02N 26	SN74LS563N 150	SN74LS145N 120	SN74LS197N 120
SN74LS03N 26	SN74LS73N 35	SN74LS148N 175	SN74LS221N 125
SN74LS04N 26	SN74LS74N 40	SN74LS151N 85	SN74LS240N 220
SN74LS05N 26	SN74LS75N 46	SN74LS153N 80	SN74LS241N 190
SN74LS08N 20	SN74LS76N 35	SN74LS154N 180	SN74LS242N 190
SN74LS09N 22	SN74LS78N 35	SN74LS155N 125	SN74LS243N 195
SN74LS10N 18	SN74LS78N 35	SN74LS156N 125	SN74LS244N 210
SN74LS11N 26	SN74LS85N 110	SN74LS157N 60	SN74LS245N 380
SN74LS12N 25	SN74LS86N 40	SN74LS158N 99	SN74LS247N 125
SN74LS13N 55	SN74LS89N 65	SN74LS160N 115	SN74LS248N 195
SN74LS14N 89	SN74LS91N 99	SN74LS161N 115	SN74LS249N 130
SN74LS15N 25	SN74LS92N 90	SN74LS162N 115	SN74LS251N 145
SN74LS16N 20	SN74LS93N 85	SN74LS163N 90	SN74LS253N 125
SN74LS17N 26	SN74LS95AN 120	SN74LS164N 150	SN74LS257N 140
SN74LS22N 26	SN74LS96N 175	SN74LS165N 170	SN74LS258N 95
SN74LS26N 29	SN74LS107N 39	SN74LS166N 175	SN74LS259N 145
SN74LS27N 35	SN74LS109N 39	SN74LS168N 195	SN74LS260N 39
SN74LS28N 35	SN74LS112N 39	SN74LS169N 195	SN74LS261N 350
SN74LS30N 25	SN74LS113N 44	SN74LS170N 250	SN74LS266N 39
SN74LS32N 27	SN74LS114N 44	SN74LS173N 220	SN74LS273N 185
SN74LS33N 39	SN74LS122N 79	SN74LS174N 115	SN74LS279N 79
SN74LS37N 29	SN74LS123N 90	SN74LS175N 105	SN74LS280N 175
SN74LS38N 29	SN74LS124N 150	SN74LS181N 275	SN74LS283N 180
SN74LS40N 25	SN74LS125N 85	SN74LS190N 175	SN74LS290N 180
SN74LS42N 79	SN74LS126N 85	SN74LS191N 175	SN74LS293N 180
SN74LS47N 95	SN74LS132N 75	SN74LS192N 145	SN74LS295AN 220
SN74LS48N 95	SN74LS133N 39	SN74LS193N 175	SN74LS566N 95
SN74LS49N 109	SN74LS136N 40	SN74LS194AN 189	SN74LS569N 95
			SN74LS324N 180
			SN74LS670N 270

DPS.1 MAINFRAME - PASCAL SYSTEM

\$100 to IEEE spec



Send 50p for our ITHACA catalogue

ITHACA

PASCAL/Z build your own Pascal Micro Development system. IEEE-S100 bus system using DPS1 main-frame. Supports K2, ASSEMBLE/Z and PASCAL/Z on 8" disc. Complete system £2910.00

\$100 BOARDS

8k Static RAM board (450ns)	£99.00
8k Static RAM board (250ns)	£117.00
Z80 cpu board (2MHz)	£105.00
Z80 cpu board (4MHz)	£123.00
2708/2716 EPROM board	£57.00
Prototype board (bare)	£15.00
Video display board (64 x 16, 128U/L Ascii)	£108.75
Disc controller board	£131.25
Disk operating system	£45.00
ASSEMBLE/Z Macro Assem	£37.50
PASCAL/Z compiler	£205.00
PASCAL/Z CP/M	£235.00
16k Static RAM	£275.00


MULTIWAY CONNECTORS

INSULATION PIERCING	35 70	480
20 way plug	2.30	36.72
25 way plug	2.70	40.80
34 way plug	3.30	43.86
50 way plug	4.60	50.100
20 way skt	3.40	GOLD 156 PITCH
26 way skt	4.00	6.12
34 way skt	4.80	10.20
30 way skt	6.00	12.24
EDGE CONN PCB		15.30
GOLD 1" PITCH		18.36
27 44	3.20	22.44
25 50	3.60	28.56
28 56	3.90	36.72
30 60	4.15	43.86
		125
		150
		200
		220
		230
		265
		330
		390
		450
		64 way DIN male
		65 way DIN female

VISIT OUR SHOWROOM

WE ALSO STOCK:- A comprehensive range of books and magazines, VERO products including S100 and Eurocard and Wire Wrap equipment, Weller soldering equipment, Ribbon Cables, tools, tapes, diskettes, connectors and OK Tool range. Systems continuously on display in our showroom.

CRYSTALS	4MHz	2.10	F8(13850)	9.50
100k	4.43M	1.00	8080A	6.33
200k	5MHz	2.70	6809	24.00
1MHz	6MHz	2.70	280	8.00
1008k	7MHz	2.70	280A	15.00
1843k	7.168M	2.50	8085A	12.95
2MHz	8MHz	2.70	6502	8.00
2457k	10MHz	2.70	SCMP11	10.00
3276k	10.7M	2.70	6802	13.95



ALL PRICES

Exclude VAT & P/P
VAT 15% P & P 40p on small orders.
For larger items please Tel.
Telephone credit card orders
accepted subject to 15 min.
RAPID MAIL ORDER SERVICE



CATALOGUE

NEW A4 SIZED
ONLY 50p & S.A.E.

1980

VISIT OUR SHOWROOM SOON
9.30 - 5.30 Mon-Fri
1.30 - 2.30 closed lunch
9.30 - 5.00 Sat
Thursday half day 1.30



TRANSAM COMPONENTS LTD, 12 CHAPEL STREET, LONDON NW1

Tel: 01-402 8137 Telex: 444898

Further investigation into the world of data processing reveals an assortment of sorts.

Data processing, as we've said before now, is the real purpose of all but the specialised 'number-cruncher' microprocessors. This month we're going to kick-off by examining a program which is particularly important for data processing applications — a sorting program. Sorting in this context means putting into numerical order and the program arranges a given quantity of bytes into ascending order. It could be modified without too much trouble to arrange the bytes in descending order.

NBYTE	0F1D	store number
SGNL	0F1E	00
DBYTE	0F1F	00
RSTR	0F20	C4
	0F21	00
	0F22	C8
	0F23	FB
	0F24	C0
	0F25	F8
	0F26	C8
	0F27	F8
	0F28	C4
	0F29	50
STRT	0F2A	31
	0F2B	03
	0F2C	C5
	0F2D	01
	0F2E	F9
	0F2F	00
	0F30	98
	0F31	02
	0F32	94
	0F33	09
RSTR	0F34	B8
	0F35	EA
	0F36	9C
	0F37	F3
	0F38	C0
	0F39	E5
	0F3A	9C
	0F3B	E4
OUT	0F3C	3F
XCHNG	0F3D	C1
	0F3E	FF
	0F3F	01
	0F40	C1
	0F41	00
	0F42	C9
	0F43	FF
	0F44	01
	0F45	C9
	0F46	00
	0F47	C4
	0F48	01
	0F49	C8
	0F4A	D4
	0F4B	90
	0F4C	E7
	0F4D	3F

Setting up :

0FF9	0F	
0F50		onwards — numbers to be sorted.
0F1D		Number of bytes to be sorted
0F20	—	GO

Fig.1. The numerical sort program. This is a sort of the type called a "bubble-sort", in which each pair of numbers is compared in turn. A machine code sort of this type is very much faster than a similar sort operation using a computer language like BASIC.

A Sort Of A Program

This program, listed in full in Fig.1, is by far the most complex we'll meet in this series — and took longest to write! Next month we'll look at methods of developing and debugging long programs, but meanwhile let's go through the steps of this program. Addresses 0F1D to 0F1F contain quantities which are needed in the program. 0F1D must be set at the start of a run to hold the total number of bytes which are to be sorted; 0F1E and 0F1F are set to zero initially. These addresses have been labelled with names so that you can follow the various fetches, stores and jumps in the program. The program itself starts at 0F20, loading 00 and storing in 0F1E. This is a restoring operation whose purpose will be understood later. Similarly steps 0F24 to 0F27 load up the number from 0F1D and store it again at 0F1F. This may seem odd, but the reason is that 0F1F is decremented on each loop and we have to keep the original number somewhere else. We could use a load immediate for this, but this would mean having to alter a quantity inside the program to change the number of items. The last of the 'restoration' items is from 0F28 to 0F2A, and this lot restores the lower byte of P1 to 50. We're making the assumption that the list of bytes to be sorted starts at 0F50, so that pointer register P1 has been set to this address.

Now for the fun. What we're going to do is to load in two consecutive bytes, and subtract the second byte from the first. Now if the bytes are already in ascending order, this action will give a negative result, if the bytes are equal the result is zero and if the bytes are in descending order, the result is positive. Taking these out of order, if the result of the subtraction is positive, the numbers are out of order and they need to be exchanged. We can use a JP instruction here, but we have to be careful, because JP means Jump-if-positive-or-zero. That — or zero — bit is the catch, because if we exchange two equal bytes there's no end to the number of times we can swap the two around and the program will go into an endless loop.

At 0F2B then, we set the carry/link, because we're going to do a subtraction. At 0F2C, 0F2D we load the first byte from the table which starts at 0F50. Now we've got to remember that this will leave the pointer P1 at 0F51, because it has incremented. When we fetch the next number in the table, using the indexed complement-and-add instruction F9, the displacement number is zero — we're at address 0F51 already.

Now we have either zero, a positive number or a negative number in the accumulator. We deal with the zero problem first at 0F30, 0F31. As we've said, the zero result

MPU's BY EXPERIMENT

means that the bytes are equal, and the 02 displacement at 0F31 lets us skip the next steps at 0F32, 0F33. That way we don't get tied into an endless loop in the next steps.

Stepping Out

Next steps? 0F32, 0F33 is a jump-if-positive step, which is *just* a jump-if-positive, since we've now eliminated the zero possibility. If we have a positive result in the accumulator, the bytes need to have their order exchanged, so the program has to jump forward to the address 0F3D labelled XCHNG. We'll look at that later. If there's no need to swap and the bytes are either in the correct order or equal, then the next step is at 0F34. Here the B8EA sequence decrements and loads from address 0F1F, because one step of sorting is complete. If the number loaded from 0F1F is not zero, the JNZ at 0F36 will cause the program to loop back to 0F2B to sort another pair of bytes, taken from 0F51 and 0F52 this time. If we've already run through all the bytes, then the byte in the accumulator at step 0F36 is zero, and the normal loop doesn't take place. Instead the program continues with a load from address 0F1E. At the start of a run, this address contains zero, but if two bytes have been exchanged, this is set to 01, indicating that the bytes are not in order. If this byte is 01, then the JNZ instruction at 0F3A returns the program to address 0F20, so that the whole sorting exercise can take place again. If there has been a complete run through without any swapping needed, then the signal byte from 0F1E is zero and the program runs through to 0F3C. This byte is 3F, so it's the end of the program.

Now how is the exchange done? The exchange part of the program starts at 0F3D and can be reached only by a jump. At 0F3D, 0F3E we have a load-to-accumulator, indexed to P1. The displacement has to be FF (-1 in decimal), because the pointer register has incremented. For example, at step 0F2C, if we had started at 0F50, the index would have incremented to 0F51. To get the first byte again, we need 0F51 - 1 which is 0F50. Simple, really! Having loaded this byte out of its memory address, we use 01 (at 0F3F) to slip it into the extension register. In our example, using the first pair of bytes 0F50, 0F51, we would now have the byte which was in 0F50 stored in the extension register. The next load, at 0F40, 0F41 takes out the byte that the pointer P1 is pointing to, in our example, the byte at 0F51. We want this byte pushed back into the first of the two addresses, 0F50 in our example. The C9FF instructions at 0F42, 0F43 do just this, with the FF ensuring that this byte is pushed back into the first address (0F50 in our example). Now at 0F44, we take back the byte which has been stored in the extension, using the 01 exchange instruction. This byte has to be stored in the second of the two addresses (0F51 in our example), so the C900 instructions take care of it, storing at the address stored in P1. Now we have to set the signal. The load immediate at 0F47 puts 01 in the accumulator, and C8D4 transfers this byte to address 0F1E, to act as a signal at step 0F38. With the exchange completed, we can jump back to address 0F20 to start another run of the sort.

Sorting It Out

That's the program. The set up operation is to dial up 0FF9 and set the byte to 0F, then abort to set the bytes to be sorted from 0F50 onwards. Another abort, this time to 0F1D, and the number of bytes can be keyed in and three 'Mem' steps will take us to 0F20 where the program can start. At the end of the sort, the display will show address 0F3D - and you should know why by now!

Try it out after switching on, simply using the 'garbage' as data, and you'll see the number of bytes which you have specified (at 0F1D) put into order.

A Touch Of Python!

Now for something completely different. Many applications of the 8060 are in control, so that control outputs are needed. Most MPU's need another chip, an I/O port, for this job. The I/O port is connected to the data and address buses, and can give various outputs or inputs when addressed like memory. A port is available for the 8060; it's the INS8154, which is an optional extra for the Mk 14. For a surprising number of applications, though, the built-in features of the 8060 make any such additions unnecessary.

What are these built-in features? For one thing, there are the three 'USER FLAGS', at pins 19, 21 and 22 on the MPU and on lines 30, 32, 31 (in that order) on the top edge connector of the Mk 14. Each of these can be set (1) or reset (0) under program instruction and is latched, so that it'll stay set, or reset, as instructed while the program moves on to something else. Just using these as they are gives you three outputs, but for more you only need a binary-to-octal decoder, such as the 8250 (Signetics), which converts binary signals on three lines to eight separate outputs. That way you can have Flag 0 giving an output on line 0, F1 an output on line 1, F0 and F1 an output on line 3 and so on up to line 7. If you happen to have a 7445 BCD to decimal decoder handy, you can use that by connecting the D input (pin 12) low and using outputs 0 to 7 only (pins 1 to 7, and 9). We're just going to taste what can be done by attaching LED's to these outputs. Solder wires to the edge connection at positions 30, 32, 31 and connect the ends to LED's with limiting resistors of around 2k2. I used the ever-handy Eurobread-board for this and other ideas described next month. Make sure you know which LED is controlled by which flag.

BACK	0F20	C4	LDI
	0F21	01	
	0F22	07	CAS
	0F23	90	JMP
	0F24	FB	BACK

Fig.2. The Flag outputs - using LED's to detect the outputs, the program shows how the flags can be set.

This done, try the program in Fig.2. Not much to it - it loads 01, transfers the 01 to the status register, then loops back. What happens when you run it? That's right, LED 0 comes on and the display goes out. Why does the display go out? Because we're running an endless loop, with nothing to display (to get out, press 'Reset'). Why are we running an endless loop? Good question - we don't need to, thanks to the latching of the flag outputs. We can, therefore, use the even shorter program in Fig.3, which ends with 3F after the CAS (07) instruction. The LED remains lit and the display shows the start of the monitor program. Now if we alter the program, placing 02 or 04 at address 0F21, we can light one of the other LED's. If we use numbers like 03, 05, 06, 07 we can light combinations of LED's. To put them out, reset, or run the program again with 00 loaded in at address 0F21.

START	0F20	C4	LDI
	0F21	01	
	0F22	07	
	0F23	3F	OUT

Fig.3. Because the flags are latched, this even shorter program can be used.

A Flash Of Inspiration

Next item — flashing an LED. To flash any of the flag LED's, we need to latch it on, wait for some time, turn it off, wait again and then repeat. The delays have to be built in because of the fast clock speed; if we didn't build in a long enough delay we wouldn't be able to see the flashing. Incidentally, using shorter delays gives audio outputs at the flags, and with three flags you could have a melody and two harmonies — very tempting, though difficult to write, and a definite step up from your monophonic door bell.

We digress. Fig.4 shows a flashing LED program. The LED that is flashed is selected by the step at 0F21, so that for other LED's or combinations of LED's you need a different number here. The sequence is simple. We load in 01 (or whatever) and CAS (07) to turn the LED on, delay for as long as possible by loading FF and delaying (8F) for the maximum count of FF as well and then turn off by loading 00 and exchanging. Another delay is then needed (or you won't see any flash) and then the program loops back to the start. Because it's an endless loop, the display goes out and you'll need to press RESET to get out of it.

Now we could run a sequence of lights by having a long program consisting of selecting the light, turning on, delaying, turning off, selecting the next one, and so on, but this sort of thing looks more of an application for a table.

LOAD	0F20	C4	
	0F21	01	Any other LED or
	0F22	07	combination of LEDs can be
	0F23	C4	chosen by altering the
	0F24	FF	number used at 0F21
	0F25	8F	
	0F26	FF	
	0F27	C4	
	0F28	00	
	0F29	07	
	0F2A	C4	
	0F2B	FF	
	0F2C	8F	
	0F2D	FF	
	0F2E	90	
	0F2F	F0	

Fig.4. A simple program for flashing an LED on and off.

It's also an application for a technique we haven't used so far — a subroutine. Fig.5 shows a program for lighting the LED's in sequence, extinguishing each one as the next one is switched on. The main part of the program is reasonably straightforward, but you have to know what the thinking behind it is to follow it through. All the steps from 0F15 to 0F20 are concerned with loading starting addresses into pointer registers P1 and P2. The address for P1 is 0F40 and the address for P2 is 0F50. Both of these addresses are within reach of a program relative jump, but we need one for an auto-indexed table and we're using the other for a subroutine because we want to. The subroutine is called only once on each loop, and from the same place, so we could equally well have used JMP instructions, but this is a good opportunity to try out a subroutine.

P1 is being used as a table pointer, then, and P2 for the subroutine. It's more usual in 8060 systems to use P3 for subroutines, but P3 is used so extensively by the monitor that it's best left alone unless you like living dangerously.

At 0F21, we set up a counter for the number of lights we want to flash in sequence. We've chosen three, but if you want various combinations of lights to come on and off you will need greater numbers here. This number is then

RELOAD	0F15	C4	Load
	0F16	0F	Registers
	0F17	35	
	0F18	C4	
	0F19	0F	
	0F1A	36	
	0F1B	C4	
	0F1C	40	
	0F1D	31	
	0F1E	C4	
	0F1F	50	
	0F20	32	
	0F21	C4	
	0F22	03	
LOAD	0F23	C8	
	0F24	0F	LAMPS
START	0F25	C5	
ON	0F26	01	
	0F27	07	
	0F28	3E	
	0F29	C4	
OFF	0F2A	00	
	0F2B	07	
	0F2C	B8	DLD
	0F2D	06	LAMPS
	0F2E	9C	
	0F2F	F5	START
	0F30	90	
	0F31	E3	RELOAD
	0F32	3F	OUT
LAMPS	0F40	01	
	0F41	02	
	0F42	04	
	0F43	3F	
	0F50	3E	
	0F51	C4	
	0F52	FF	
	0F53	8F	
	0F54	FF	
	0F55	90	
	0F56	F9	

Fig.5. An elementary "traffic-light" program.

stored (steps 0F23, 0F24) into address 0F33, from which it will be fetched and decremented on each loop. The flashing starts at 0F25. At 0F25, the auto-indexed load instruction takes the first byte from the table (at 0F40), puts it in the register and increments the pointer address (to 0F41). As usual, this byte, the lamp number, is exchanged into the status register so that the LED comes on. At 0F28, the instruction is 3E, meaning exchange program counter with pointer 2. Now the address which is loaded into pointer 2 is 0F50, so the exchange puts the program counter to 0F50 and stores 0F28 in P2. The counter then increments, as it always does at the end of an instruction, and the next program step is at 0F51. This is the start of the delay subroutine, using the familiar steps. At the end of the delay, there's a jump-back-to-0F50 instruction. What does that do? At 0F50, the instruction is 3E, the exchange code. Exchanging now means that the address in P2, which has been 0F28 since we previously exchanged, goes back into the program counter and 0F50 (the address to which we jumped at the end of the delay) goes back into P2, restoring it to what it was. The program counter then increments and the next instruction comes from 0F29. Notice that the exchange instruction 3E had to be at the start of the subroutine so that the correct address could be loaded back — if we put it at

MPU's BY EXPERIMENT

```

0F50  3E
0F51  C4
0F52  FF
0F53  8F
0F54  FF
0F55  C4
0F56  FF
0F57  8F
0F58  FF
0F59  90
0F5A  F5
    
```

Fig.6. One method of obtaining longer delays.

0F55 that's where the next subroutine would land up; not so useful!

At 0F29 to 0F2B we switch the LED off, and then steps 0F2C to 0F2F select the next lamp, decrementing the lamp count and looping back. When all the lamps have been lit in sequence, we get to 0F30, which puts us back to 0F15, reloading the registers.

One of the advantages of this scheme is that it lets us play around with different sequences and delays. You can get whatever sequence you want by using a longer table, with the correct number of bytes loaded in at 0F22. You can get different delays by modifying the subroutine shown in Fig.6. This uses two lots of delays, so that the ON part of each lamp is longer. Not enough? Then try the subroutine shown in Fig.7. This loads a timing byte, entered at 0F53 into store at 0F51. The usual delay follows, but at the end of the delay, the timing byte is decremented, and the number tested at 0F5C. If the byte is not zero, the delay is repeated and only when all the repeats are finished does the subroutine go back

```

IN      0F50  3E
STORE   0F51  00
TIME    0F52  C4
        0F53  0A
        0F54  C8
        0F55  FC      to store
DLY      0F56  C4
        0F57  FF
        0F58  8F
        0F59  FF
        0F5A  B8
        0F5B  F6
        0F5C  9C      back to
        0F5D  F8      DELY
        0F5E  90      back to
        0F5F  F0      IN
    
```

The byte at 0F53 determines the total time for each light.

Fig.7. A better method which enables the delay time to be more easily controlled.

to the entry point. We've used 0A at 0F53 to determine the delay; long delays are possible with this scheme.

If Music Be Microed.

Music generators use a more complicated scheme, because two delays are needed, one for on and one for off. The delay has to be taken from a table, because delay decides frequency and you wouldn't want a tune with just one note. The number of times you loop round an on-off flag program determines the duration of a note and this is taken also from a table which loads a counter.



Micro-Computer Centre for the MIDLANDS

Nascom and Commodore Specialists

A full range of micro computers and peripherals are available, whether buying or browsing we can give helpful and friendly advice.

Commodore Business Systems are suitable for the professional office, the small business or the sole trader. We will be pleased to give advice and a demonstration.

Nascom 2 systems can be fully built and tested to order. We are sole distributors for the **Micro Type case** for Nascom 1 and 2, also stockists of the **William Stuart colour graphics** and full range of 'add-ons'.



Business & Leisure Micro Computers

16 The Square, Kenilworth, Warwickshire CV8 1EB.
Tel: (0926) 512127

Happy Memories

4116	200ns	£4.50
2114	200ns	£4.75
2708	450ns	£4.95
21LO2	450ns	85p

4116	150ns	£5.50
2114	450ns	£4.25
2716	5 volt	£16.95
21LO2	250ns	£1.25

VERBATIM mini discs soft sector —
with FREE library case £19.95 per ten

SALE

We're moving shortly to new premises and don't want to carry much. Bargains from Sat. 26th April. All prices include VAT. 30p postage on orders below £10. Access and Barclaycard. All order to:

DEPT CT

19 Bevois Valley Road, Southampton,
Hants. SO2 0JP Tel: (0703) 39267

CLASSIFIED INFORMATION

Semi-Display:—

- 1- 3 insertions — £5.50 per single column centimetre
- 4-11 insertions — £5.00 per s.c.c.
- 12 insertions — £4.50 per s.c.c.

Classified:—

- 21 pence per word (minimum 25 words)
- Box number £1.00 extra

ALL ADVERTISEMENTS IN THIS SECTION MUST BE PRE-PAID

Closing date:— 2nd Friday in month preceding publication
 Advertisements are accepted subject to the terms and conditions printed on the advertisement rate card (available on request)
 Cheques and postal orders should be crossed and made payable to 'Computing Today'

CLASSIFIED ADS, COMPUTING TODAY, 145 CHARING CROSS ROAD, LONDON WC2H 0EE
 (Tel. 01-437.1002)

EAST ANGLIAN MICRO ENTHUSIASTS SEE US FIRST!

EASICOMP 'COMPANION' — Superboard, smart case, 8K RAM, BASIC and manuals, UK spec, 1 year guarantee £280. SUPERBOARD 4K RAM, BASIC, manuals, UK spec £155. MICROCASES red/black or ivory/brown £28. PSU KIT for Superboard, etc. £15. MODULATORS £4.50. 4K RAM 2114 £34. Range of components in stock. DATA CASSETTES C12 plus case 55p or 10 for £4.80. REGULATORS various V/A eg 5V 3A £2.50 (KIT). SOFTWARE for Superboard, PET, Nascom, Research Machines — 1st class new programs £1.50 — £3.50. WANTED — Software for Superboard. PET, Nascom send tape/listing for approval must be good original material. Highest commission rates S.A.E. details/lists. Enquiries welcome. Callers any time (By appointment). Prices include post (discount to callers) BUT NOT VAT so please add 15% VAT to total. All ex-stock
Easicomp Ltd.
 0603-416352/407923
 57 Parana Court, Sprowston, Norwich.

J. MORRISON (MICROS)

•4K BASIC for 6800 systems, powerful arithmetic 9 digit exp. £95
 Data/Listing £40.00
 Eprom £40.00
 •STANDARD ASSEMBLER approx 2½K supports FCB, FCC, ORG, EQU, RMB. All motorola mnemonics. Data/Listing £7.50
 •6800 TRACER displays CC, AB, INDX, SP, Address, Data. Data/1K Listing £3.50
 •LIFE. The Game. Fantastic display manual or auto mode, generation, population counters. Requires 2K Ram. 1K memory mapped VDU. £3.50
 Data/Listing £3.50
 Other games from £1.00 S.A.E. Lists.
 All prices inclusive. 17 Summersell Bentons Rise London S.E.27.
 Tel. 01 761 1186

MK14 CORNER Interface Board, includes Flag Driven Mains Relay, LED Indicators for all Serial I/O, A/D and Single Step Chip, Prototype Area; PCB and Circuit £3.95. Replace calculator display with ½" FND500s; PCB, Filter and Instructions £1.95. Ready-built Replacement Keyboard £11. Useful notes on MK14 75p. Programming sheets 95p a pad. Rayner, 'Kismet', High Street, Colnbrook, Bucks.

50 Hz SUPERBOARDS BRITISH MODEL

from **£190** plus VAT
 Fully built, tested and set up
 Authorised dealer backup
 Free cursor control, backspace, etc. taps
 C.T.S. 1 Higher Calderbrook, Littleborough, Lancs.
 Tel. Littleborough 79332 anytime

uHEX EPROM PROGRAMMERS

426 2508/2708/2758/2516/2716
 Dual and Single supply Eproms, £95
 416 2704/2708/2716 Dual only, £65
 480 2704/2708 Kit £35. Built £40

All programmers require only standard power supplies.
 The 426 and 416 are cased and have push-button selection.
 Program any length block into the Eprom.
 Software included. Range covers Z80, 8080, 6800 and 6500. State machine.
PIO, PIA INTERFACE MODULES
 Available for Z80/8080 and 6800/6500.

Prices include carriage. Please add VAT. SAE for further product information.

MICROHEX COMPUTERS

2 Studley Rise, Trowbridge, Wilts.

A SUPERCASE FOR YOUR SUPERBOARD!

Precision formed in super quality ABS — supports a TV

Complete with all screws and holes for instant fitting

Exciting Flame Red (black base) or Ivory (brown base)

COMPUKIT model too!

Instant refund guarantee — or send for leaflet and Superboard software list

MICROCASE

15 HAVELOCK ROAD, BRIGHTON, SUSSEX

£26 plus VAT post free

"TURNS A BOARD INTO A REAL COMPUTER"

INTENSIVE WEEKEND COURSES IN

BASIC

including hands-on mini computer operation.

This short intensive course is intended to instruct from minimal knowledge to an operational capability of computer programming in BASIC high level language. The course is fully residential from Friday evening to Sunday afternoon. Option of non-residential weekend, weekday evening and weekday courses available if required.

For further details of dates available, fees, etc. Phone (0401) 43139, or write to: Dept CT

CLEVELAND BUSINESS SERVICES
 Cleveland House, ROUTH
 Beverley, North Humberside

50Hz SUPERBOARDS BRITISH MODEL

NOW FROM £150 + VAT + p.&p.

Fully built, set up and tested

AUTHORISED dealer back-up

C.T.S. 1 Higher Calderbrook
 Littleborough, Lancs.
 Tel. Littleborough 79332 anytime

COLOUR MODULATOR

Kit **£9.95** FOR ALL TV GRAPHICS!
 inc. UHF Red, Green, Blue inputs (can be mixed). Available now. Nascom Colour Kit, £45.00 + VAT + MODULATOR Graphics Software.
WILLIAM STUART SYSTEMS
 Dower House, Billericay Road, Herongate, Brentwood, Essex, CM13 3SD. Tel: (0277) 810244
 Barclaycard Access welcome

ASR 33 TELETYPE excellent condition with stand and 4 reels paper. RS232 compatible £450 o.n.o. C. Bowden Phone 828 8695 (London) anytime

COMPUTER REPAIRS. Kits Built. We have been in Computer Business two years and use modern computerised testing. Repairs to most makes E.g. MK14 £2.50, Nascom 1 £5.00, Nascom 2 £12, UK101 £12, Elf 2 £4, Acorn £3.50 and others, plus parts and postage. Good turnaround Electronic devices made to your specification XY Graph plotter £45 and computer interface if required £15 plus carriage. MK14 VDU kit £25. Large printer with tape punch, reader desk and electronics, but requires computer interface. £200 callers only. Phone evenings, Redditch (0527) 61240. Redditch Electronics, 21 Ferney Hill Avenue, Redditch, Worcs., B97 4RU.

MK14, cased, calculator keyboard, P10, extras RAM, Cassette interface, Revised Monitor, £60; VDU board, £30; PROM programmer kit, £10; S. C. Jackson, 11 Forest Court, Moseley, Birmingham (021-449 5399).

CLASSIFIED

TRITON, L5.1, full 4K RAM. Fully built and tested, complete with documentation and calibration tape. £275 o.n.o. Ring Reading (0734) 341996 evenings/weekends.

L5.1 Triton System with full board RAM. Fully built and tested. Manual and leads included, £330. Colchester 61104.

FOR SALE. Acorn Computer. Practically brand new, assembled and tested. Complete with power supply and all literature, £80.00. Phone Pontesbury 214, 4 p.m. onwards.

SUPERBOARD II, 3 months old, case, P.S.U. Modulator, as new. Few programs, £250 or best offer. Phone 061 624 9447 evenings.

CHEAP PRINT - Complete package - printer, interface, software, even paper. These are surplus but reconditioned and guaranteed plain paper impact printers. Ready to run for Triton, £47.50 plus carriage. Other systems S.A.E. Davidson, Littlefield, Hawling, Cheltenham, GL54 5SZ. Phone 04515 514.

BRITISH PATENT NO. 1 475 471. Floating Point Apparatus and Techniques. Owner desires commercial exploitation on reasonable terms by licence or sale. Inquiries Fitzpatrick's, Chartered Patent Agents, 14-18 Cadogan Street, Glasgow, G2 6QW and Warwick House, Warwick Court, London, WC1R 5DJ.

UK 101 4K RAM, fully built and operational in portable case. Also cassette deck and programs tapes, £255. A. Talbot, 24 Earle Street, Barrow in Furness, Cumbria.

NASCOM 1, P.S.U., documentation, software, spares, cased, £200 o.n.o. Also MEK6800D2, £90. SMART 1, £90. Offers considered. P. Watson, 101 Village Road, Bromham, Bedford. Tel. Oakley 2867 anytime.

EXPLORER 85, 20K RAM, 10K ROM, 8K Basic on tape and ROM. VID terminal both housed in makers cases in IBM Blue fitted extractor fan. Mint £400 o.n.o. 01-560-0793.

77-68 CPU, MON 1 boards, complete and working. MON 2, some chips missing. All manuals and 6800 Cookbook, £80 o.n.o. (will split). Lots of 2114's, £3.25. Phone 07073-36330.

TRITON computer, 4K L5.1 monitor and Basic plus 4K of RAM. Fully cased and complete with documentation and games tapes, £230. Telephone Fareham 282208 evenings.

WANTED: Small quantity TMS 4063 RAMS. Will also consider boards containing these. Telephone Bradford 26731 ask for Mike Hartas.

NASCOM II, with 16K RAM board. Graphics, 8K Basic. Professionally built and fully tested. You can try it before you buy it, £435. Tel. 01-953-9545.

SWTC VDU, 64/32 characters per line, 16 lines, switchable Baud Rates, RS232 interface, UHF modulator, £200. Ring Mr. Yelland 01-531 0716 after 6 p.m. (Walthamstow).

MUST SELL. 7768 Boards, some fully constructed, some bare, Touch keyboard, 19" 5u Rack, cassette interface, etc. Will sell £140 the lot or individually. Phone R. Kilburn on 01-478-2635.

S100 MEMORY, 8K Static Ram Board complete with 450N SEC 2102 Chips £60. 16K Static Ram Board complete with 450N SEC 2114 Chips £100. 16K Eprom Board partially built £15. Nascom 1 Sloo Buffer Board £10, all with data sheets, six Newbear 2K Ram Cards 43 way BUS complete with 450 as 2102 Memory Chips £10 each.

FOR SALE, APPLE 2 PLUS. 6 Months old, £625 including VAT. Telephone 0624 822 463.

APPLE super software, bargain prices, send for list. T. Kerruish, 53 Silverburn Crescent, Ballasalla, Isle of Man.

ASR 33 TELETYPE, excellent condition with stand and 4 reels paper. RS232 compatible, £450 o.n.o. C. Bowden. Phone 828 8695 (London), anytime.

PET 2001-8 - Fitted Upgrade ROM, hobby use only. With manuals and many programs (tutorials, utilities and games) - £425. Phone Blackpool (0253) 869108 evenings/weekends.

MK14, includes case, power supply, single shot, cassette interface, improved monitor, RAM I/O, extra RAM, electronically debounced keyboard, full documentation, extra literature, £70. Electronic debounce info (ten chips) and PCB layout, £4. Phone 01-366 4297

IMPROVED MK14 MONITOR: Alpha-numeric keyboard, labelled cassette files, vdu routines. Uses existing hardware. Full documentation, £7.50 or see for details: P. R. Trevellick, Queens College, Oxford.

PLAY SPACE INVADERS on your NASCOM. Full feature, 3K object code. Many options. SAE for full details. J. Atkins, 37 Wellington Road, Maidenhead, Berks. Telephone 0628-35145.

FOR SALE, APPLE 2 PLUS. 6 months old, £625 including VAT. Telephone 0624 822 463.

ADVERTISING INDEX

ACORN COMPUTERS.....	38a
BARINGLOCK LTD	44
BITS & P.C.s	25
B.N.R.S.	44
BUSINESS & LEISURE	71
CAMBRIDGE LEARNING ENTERPRISES	66
CARTER KEYBOARDS	25
CHROMASONICS	22
COMMODORE SYSTEMS	17
COMP, COMP, COMP	75
HAPPY MEMORIES	71
A. J. HARDING (Molimerx)	22
HENRY'S RADIO	50
INTERFACE COMPONENTS	45
LOWE ELECTRONICS	4
APPLEWARE	5
MIDLAND TRADING CO	74
MIGHTY MICRO	8
NASCOM	24
NEWBEAR	76
NIC MODELS	44
POWERTRAN COMPUTERS	2
SCIENCE OF CAMBRIDGE	36 & 37
TANGERINE COMPUTER SYSTEMS	39b
TERMINAL DISPLAY SYSTEMS	44
TIMEDATA	73
TRANSAM COMPONENTS	67
VERO	25
WM. STUART SYSTEMS	22
WINCHESTER TECHNOLOGY	44

USE A REAL KEYBOARD



£39.50

+£1.50 P&P + VAT

Our KB060 keyboard is designed for ease and accuracy of use, with 60 keys arranged in stepped rows, auto repeat function and 2-key rollover. UC and LC ASCII coding. Brand new; built and tested. Rigidly constructed and supplied with full data and mating connector. S.a.e. for data.

TIMEDATA Ltd. 57 Swallowdale, Basildon, Essex

MITRAD


(MIDLAND TRADING COMPANY)

ZETRON! THE UNRIVALLED RANGE IN ELECTRONIC DIGITAL WATCHES. ZETRON!

GENTS (4 BUTTON) CHRONO

A new style chronograph with two buttons either side of the watch. Constant display of hours, mins, secs, with the added feature of weekday and am/pm indication. Month, date and weekday is an optional display with date indicator. The chrono has split and lap mode facilities running to 1/100sec. 10 function, 4 flags and 6 digits. Back-light and adjustable stainless steel strap.

ONLY £8.95



GENTS CHRONO ALARM (FRONT BUTTON)

Brand new 1980 style. Basic working modes of chronograph. 24 hour alarm and dual time zone. Constant display of hours, mins, secs and weekday indication with am/pm, T2 and A1 flags. Date indication. The chrono runs to 1/10th sec. With the 1/10th's running along the bottom of the watch. It has a twelve hour capacity. The 24 hour alarm system is actuated for a full 60 seconds. Dual timing facilities give the watch the added touch of compactness. Back-light, closely woven adjustable stainless steel strap.

ONLY £15.50



GENTS MELODY ALARM CHRONO

Brand new 1980 style. Another unique watch from the Zetron range. Constant display of hours, mins, secs, weekday, am/pm and mode square flag indication. The chrono runs to a 1/10th sec with split and lap mode facilities. Dual timing facilities are available. A musical tune "Yellow rose of Texas" is used as the alarm system, which plays for 20 secs. The tune can also be activated at an instant with the press of a button. Back-light. Another unique feature is the fact that the infinite adjustable stainless steel strap is built in as part of the watch.


ONLY £17.75



GENTS MEMORY CALENDAR ALARM CHRONO

LATEST TECHNOLOGY! Constant display of hours, mins, secs, weekday and snooze alarm indication. A further two optional display modes are available, one being the calendar and month, which can be increased or decreased to give the appropriate month of the year. A 1/100th sec chrono with split and lap mode facilities is built into the watch. A 24 hour alarm with a 10 minute snooze function is also standard to the watch. A further feature is the back-light and fully adjustable stainless steel strap.

VALUE AT £19.95



GENTS MELODY MULTI CHIME ALARM CHRONO

Latest technology! Constant display of hours, mins and secs, weekday, date and month with mode and chime indication display. The musical alarm once actuated plays the tune "Oh Suzanna". Two further alarm systems are incorporated in this outstanding watch: (i) 24 hour alarm; (ii) count down alarm. The watch can be set to chime on every full hour. A 1/100th sec chrono is standard to the watch. Can be switched off. Mineral glass face. The watch also has a battery hatch backlight and infinitely adjustable stainless steel strap.

VALUE AT £19.95



LADIES COCKTAIL

Elegance and style for the lady with the discerning taste. In gold or silver finish with matching bracelet. Constant display of hours and mins with month, date, secs, auto calendar and back-light.

VERY SPECIAL £10.50



LADIES SUGAR

Another superb ladies watch with that extremely popular sugar frosted finish. Links can easily be removed from the strap and the clasp has a spring mechanism built in to give a comfortable fitting. Constant display of hours and mins, with month, date, secs, auto calendar and back-light.

£10.50



GENTS CHRONOGRAPH

Probably the best looking chrono on the market. Constant display of hours, mins, secs with am/pm indication. Also month, date and weekday indication. 1/100th and 1/10th sec with split and lap mode facilities. Back-light, closely woven adjustable stainless steel strap.

SPECIAL £8.95



GENTS FRONT BUTTON ALARM

Latest style! Constant display of hours, mins, secs, am/pm, weekday and alarm indication. A further two optional display modes are available. The watch comprises of 7 digits, 12 function and is programmed to the year 2009. The alarm can be set to any time within 24 hours and operates for 30 sec. Back-light and a closely woven adjustable stainless steel strap finish the watch off with a really superb sleek look, only 8mm thick.

£13.25



ZETRON! WHERE RELIABILITY, STYLE AND ELEGANCE REALLY COUNT ZETRON!


Before buying a digital watch, consider the following points we offer:

- (i) 48 hour despatch guaranteed.
- (ii) Full instructions and 12 month guarantee.
- (iii) 10 day money back guarantee if not completely satisfied.
- (iv) Free felt presentation case with each watch.
- (v) Our own personal satisfaction guarantee.

Phone or write for full comprehensive catalogue on the complete range of digital watches we carry. Large discounts available for bulk buyers. Trade lists on application. P&P per item 85p which includes insurance. Cheques or PO's should be made payable to **MITRAD** and sent to **DO (CT), 58 Windmill Ave, Kettering, Northants, NN16 8PA. Kettering 522024 (STD 0536).**

COMPUKIT UK101

EUROPE'S FASTEST SELLING ONE BOARD COMPUTER

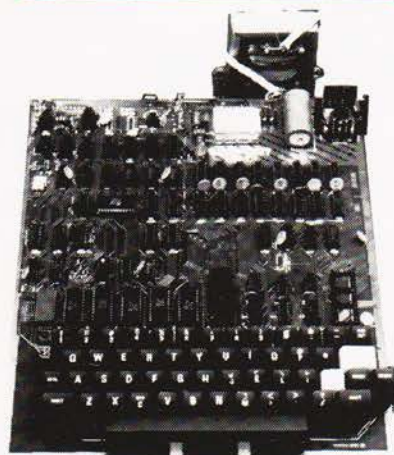

Simple Soldering due to clear and concise instructions compiled by
Dr. A.A. Berk, BSc. PhD

★ 6502 based system — best value for money on the market.
★ Powerful 8K Basic — Fastest around ★ Full Qwerty Keyboard ★ 4K
RAM Expandable to 8K on board. ★ Power supply and RF Modulator on
board. ★ No Extras needed — Plug-in and go. ★ Kansas City Tape
Interface on board. ★ Free Sampler Tape including powerful Dissassembler
and Monitor with each Kit. ★ If you want to learn about Micros, but
didn't know which machine to buy then **this is the machine for you.**

Build, Understand and Program
your own Computer for
only a small outlay.

KIT ONLY **£199** + VAT
NO EXTRAS NEEDED

AVAILABLE READY
ASSEMBLED & TESTED
READY TO GO FOR **£249** + VAT

Specialty designed case for CompuKit in orange/black
With room for accessories **£29.50** + VAT

6502 Assembler/Editor for CompuKit **£14.90** + VAT

The **CompuKit UK101** comes in kit form with all the parts necessary to be up and working, supplied. No extras are
needed. After plugging in just press the reset keys and the whole world of computing is at your fingertips. Should you
wish to work in the machine code of the 6502 then just press the M key and the machine will be ready to execute your
commands and programs. By pressing the C key the world of Basic is open to you.

This machine is ideal to the computing student or Maths student, ideal to teach your children arithmetic, and is also great
fun to use.

Because of the enormous volume of users of this kit we are able to offer a **new reduced price of £199** + VAT

8MHz Super Quality Modulators	£4.90
6MHz Standard Modulators	£2.90
C12 Computer Grade Cassettes 10 for	£4.00
Super Multi-rail P.S.U. +5 -5 +12v	£29.50
ETI Breakout Game — Chip and PCB	£9.90
S100 Expansion Motherboard for Nascom I	£39.00
Anadex Printer Paper — 2000 sheets	£25.00
Floppy Disks 5 1/4" Hard & Soft Sector	£3.50
Floppy Disk Library Case 5 1/4"	£3.50
Eprom Boards	£63.00
8K Static Ram Boards — S100	£110.00
Cartridges for Grandstand	£11.99
George Risk Ascii Keyboard	£39.00
Cartridges for Atari — Full Range in Stock	£13.90
Interface PET IEEE — Centronics Parallel Not decoded £49.00 Decoded £77.00	
Interface to Centronics parallel for TRS80	£75.00
Verocases for Nascom 1 & 2 etc.	£22.50
Keyboard Cases	£9.90
Electric Pencil for TRS80	£29.00

NASCOM-2 MICRO-COMPUTER



only **£295**
+ VAT

Your choice of freebies with
every Nascom 2 purchased from us
either **FREE POWER SUPPLY**
OR FREE GRAPHICS ROM
OR FREE VERO CASE TO
TAKE NASCOM 2

Microprocessors Z80A 8 bit CPU. This will run at 4MHz
but is selectable between 1/2/4 MHz. This CPU has now
been generally accepted as the most powerful, 8 bit pro-
cessor on the market.

INTERFACE

Keyboard New expanded 57 key Licon solid state
keyboard especially built for Nascom. Uses standard
Nascom, monitor controlled, decoding.

T.V. The lv peak to peak video signal can drive a monitor
directly and is also fed to the on-board modulator to drive
the domestic T.V.

I.O. On-board UART (Int 6402) which provides serial
handing for the on-board cassette interface or the
RS232 20mA teletype interface.

The cassette interface is Kansas City standard at either 300
or 1200 baud. This is a link option on the NASCOM 2.
The RS232 and 20mA loop connector will interface directly
into any standard teletype.

The input and output sides of the UART are independently
switchable between any of the options
i.e. it is possible to house input on the cassette and output
on the printer.

PIO There is also a totally uncommitted Parallel I/O
(MK3881) giving 16, programmable, I/O lines. These are
addressable as 2 x 8 bit ports with complete handshake
controls.

Documentation Full construction article is provided for
those who buy a kit and an extensive software manual is pro-
vided for the monitor and Bas.

Basic The Nascom 2 contains a full 8K Microsoft Basic in
one ROM chip with additional features like DEEK, DOKE,
SET, RESET for simple programming
With free 16K RAM board

only **£356** + VAT



**TRS80
LEVEL 2 16K**

Fully converted to UK T.V. Standard. Comes complete with
easy to follow manuals. UK Power Supply — Cassette Leads
— Sample tapes. Special box to enable you to plug into your
own TV. Recommended for first time buyers. Just plug in
and go!

Full Range of Software Available
Model with numeric key pad **£389** + VAT
4K Level 1 — machine only **£251** + VAT

NEW REDUCED PRICES

8K **£449**
16K **£549**
32K **£649**

RRP £795
for 32K

The PEDIGREE PETS

Very popular for home & business use. 8K Microsoft Basic in
ROM. 8K Pet 32K & 16K with new improved keyboard
All with green screen

Extra cassette deck **£55** Full range of software available



video 100

12" BLACK & WHITE
LOW COST VIDEO
MONITOR

RRP £79

only **£69** + VAT

- Ideal for home, personal and business computer systems
- 12" diagonal video monitor • Composite video input
- Composite video input • Compatible with many com-
puter systems • Solid-state circuitry for a stable & sharp
picture • Video bandwidth - 12MHz + 3DB • Input im-
pedance -75 Ohms • Resolution - 650 lines Minimum in
Central 80% of CRT; 550 Lines Minimum beyond central
80%.

only **£295** + VAT
Expand your TRS80 by
32K. Memory on board
Centronics parallel port
Disk controller card. Real
time clock. Requires Level
II Basic. Interface for 2
cassette decks. complete
with power supply

32K
**EXPANSION
INTERFACE**



COMP
"Europe's Largest Discount
Personal Computer Store"

Please add VAT to all prices — Delivery at cost, will be advised at time of purchase. Please make
cheques and postal orders payable to COMPSHOP LTD., or phone your order quoting
BARCLAYCARD, ACCESS, DINERS CLUB or AMERICAN EXPRESS number.
CREDIT FACILITIES ARRANGED — send S.A.E. for application form.

14 Station Road, New Barnet, Hertfordshire, EN5 1QW Telex: 298755 TELCOM G

Telephone: 01-441 2922 (Sales) 01-449 6596

OPEN - 10 am - 7 pm — Monday to Saturday

Close to New Barnet BR Station — Moorgate Line.

★ NOW in IRELAND at: 80 Marlborough St., Dublin 1. Tel: Dublin 749933

COMP COMPUTER
COMPONENTS
(Part of the Compshop Ltd. Group)





NewBear Components



MICROCOMPUTING I.C.'s

Z8001	£142.50
MC6800	£ 6.75
MC6802	£ 8.50
MC6821	£ 4.63
MC6850	£ 4.99
MC6810AP	£ 3.61
MC6840	£ 12.72
Z80 CPU 2.5MHz	£ 8.99
Z80 P10 2.5MHz	£ 7.99
Z80 CTC 2.5MHz	£ 7.99
Z80 SIO	£ 25.57
Z80A CPU 4MHz	£ 13.99
Z80A P10 4MHz	£ 10.00
Z80A CTC 4MHz	£ 10.00
SC/MP 11 (INS 8060N)	£ 8.88
INS 8154N	£ 8.18
8080A	£ 5.50
6502	£ 9.90
6522	£ 7.30
6532	£ 12.76
6551	£ 10.79

MEMORIES

2708	£ 6.99
4116 (16K Dynamic)	£ 6.99
2716 (INTEL)	£21.50
Bulk Prices on Request	

SHARP MZ 80K at NEWBEAR

EXORCISER COMPATABLE PRODUCTS

	ASS
9600 MPU Module	£330.00
9601 Motherboard (16 slot)	£128.65
9603 Motherboard (8 slot)	£ 73.60
9602 Card cage (Kit)	£ 55.00
9610 Prototyping Board	N/A
9616 32K EPROM/ROM Module	£191.00
9620 16 port parallel I/O (with 8 PIA's)	£215.00
9620 16 port parallel I/O (with 2 PIA's)	£185.00
9622 Combination Serial/Parallel I/O Module	£250.00
9612 Buffered Utility Prototyping Board	t.b.a.
9627.8 16K RAM Module (470ns 8K bytes)	£235.00
9627 16K RAM Module (470ns 16K bytes)	£360.00
9627A 16K RAM Module (300ns 16K bytes)	£410.00
9630 Card Extender	£ 45.00
9640 Multiple Programmable Timer	£269.40
9640 Multiple Programmable Timer (Part populated)	£205.00
9650 8 port Duplex serial I/O (with 8 x 685 o's)	£240.50
9650-2 8 port Duplex serial I/O (with 2 x 6850's)	£207.00
96702 Relay Contact Module	£275.00
9690 Card Puller	£ 9.95
96102 32/32 I/O Module	£222.00

77-68 & 6800/6809 Micro System

Bearbag 1	77-68 CPU KIT	£35.00
Bearbag 5	77-68 4K RAM KIT	£55.00
Bearbag 6	77-68 MON 1 KIT	£37.50
Bearbag 12	77-68 V.D.U. KIT	£42.50
Bearbag 13	77-68 MON 2 KIT	£47.50
Bearbag 16	77-68 EPROM BOARD KIT	£21.50
Bearbag 17	77-68 PIO BOARD KIT	£40.00
Bearbag 23	77-68 32K DYNARAM KIT	£75.50
Bearbag 18	CASSETTE INTERFACE	£12.50

STOP PRESS!

6809 & FLOPPY DISC CONTROLLER BOARDS
NOW AVAILABLE - SEND/PHONE FOR DETAILS.

KEYBOARDS

Boxed 76 key, high quality Ex-Avionic Computer Keyboards

£38.00

and £1.00 P & P plus VAT
Send/Phone for details

TANDON TM100

5¼ inches, Double Sided Disk Drive **£250.00**

SHUGART SA400
5¼ inches, Single Sided Disk Drive **£189.00**

VISIT OUR NEW BOOKSHOP

1st FLOOR OFFICES, TIVOLI CENTRE,
COVENTRY ROAD, BIRMINGHAM. Tel: 021 707 7170

★★★

ACORN

6502 BASED MICRO KIT	£65.00
8K RAM KIT	£95.00
MAINS ADAPTOR	£ 5.95
V.D.U. KIT	£88.00

S100 BUS PRODUCTS - SEND FOR LIST

TERMS

Official orders (min. £10.00), Access and Barclaycard welcome. P & P 50p. PLEASE ADD 15% VAT.
SEND FOR book list and hardware catalogue.

CALLERS AND MAIL ORDER: 40 Bartholomew Street, Newbury, Berks. Tel: 0635 30505

CALLERS ONLY: 220-222 Stockport Road, Cheadle Heath, Stockport. Tel: 061 491 2290

a division of Newbear Computing Store Ltd.